

JUMBO EXIT



40m VIEWING DISTANCE - 250mm high pictograph.

LED AVAILABLE - Long Life LED available.

EASY INSTALL - Large terminal block and cable entry hole minimise installation fuss.

TESTING OPTIONS - Clevertest™, DALI compatible and Zoneworks® computerised testing options available in our Premium range.

Clevertronics' Jumbo range caters for applications requiring viewing distances not covered by conventional 24m exits.

Switchmode electronics and a dual-rate charge, high temperature Nickel Cadmium battery combination ensure maximum reliability. LED options are available for further energy and maintenance savings.

The standard Jumbo exit uses a 250mm high pictograph for viewing distances up to 40 metres. Featuring robust steel housing with slide in diffusers and back plates for single-sided and double-sided configurations.

SAVE TIME AND MONEY - UPGRADE TO CLEVERTEST™

LOWER INSTALLATION COSTS
LOWER TESTING COSTS

Emergency lights that perform their six monthly discharge tests by themselves, and indicate their status via a bi-colour flashing LED. No need for a manual test-switch.

EMERGENCY LIGHTS THAT TEST THEMSELVES!

clevertest™



JUMBO EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
PREMIUM - WM -R	PJE18M-40-WM-R	DJE18M-40-WM-R	ZJE18M-40-DATA-WM-R	ZJE18M-40-DALI-WM-R	ZJE18M-40-WM-R
PREMIUM - WM -E	PJE18M-40-WM-E	DJE18M-40-WM-E	ZJE18M-40-DATA-WM-E	ZJE18M-40-DALI-WM-E	ZJE18M-40-WM-E
PREMIUM - CM -R	PJE18M-40-CM-R	DJE18M-40-CM-R	ZJE18M-40-DATA-CM-R	ZJE18M-40-DALI-CM-R	ZJE18M-40-CM-R
PREMIUM - CM -E	PJE18M-40-CM-E	DJE18M-40-CM-E	ZJE18M-40-DATA-CM-E	ZJE18M-40-DALI-CM-E	ZJE18M-40-CM-E

For directional options please add L or R to above codes for Left or Right Arrow i.e PJE18M-40-CM-RL


PREMIUM - CM DS -R	PJE18M-40-CM-DS-R	DJE18M-40-CM-DS-R	ZJE18M-40-DATA-CM-DS-R	ZJE18M-40-DALI-CM-DS-R	ZJE18M-40-CM-DS-R
PREMIUM - CM DS -RAOW	PJE18M-40-CM-DS-RAOW	DJE18M-40-CM-DS-RAOW	ZJE18M-40-DATA-CM-DS-RAOW	ZJE18M-40-DALI-CM-DS-RAOW	ZJE18M-40-CM-DS-RAOW
PREMIUM - CM DS -E	PJE18M-40-CM-DS-E	DJE18M-40-CM-DS-E	ZJE18M-40-DATA-CM-DS-E	ZJE18M-40-DALI-CM-DS-E	ZJE18M-40-CM-DS-E
PREMIUM - CM DS -EAOW	PJE18M-40-CM-DS-EAOW	DJE18M-40-CM-DS-EAOW	ZJE18M-40-DATA-CM-DS-EAOW	ZJE18M-40-DALI-CM-DS-EAOW	ZJE18M-40-CM-DS-EAOW

PREMIUM

Wall or ceiling mount exit, 18W fluorescent lamp, dual-rate charge high temperature Nickel Cadmium battery, 2 year back to base warranty, single or double sided, running man pictogram or EXIT decal, directional options indicated.

TESTING OPTIONS

clevertest	Exit and Emergency luminaires automatically test every six months.
DALI EM	Smooth integration and networking with DALI Lighting Control Systems.
ZONENETWORKS	A real-time, automatic monitoring and testing facility for emergency luminaires.

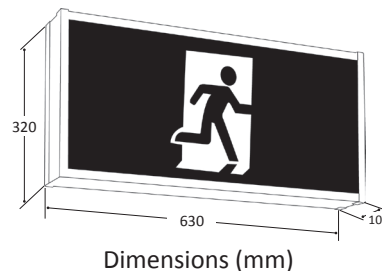

SPECIFICATIONS					
	Warranty	Power Consumption	C0	C90	C180
PJE18M-40	2 YEARS	24W	D5	A5	A2.5

SPACING TABLE & MOUNTING HEIGHTS											
Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m
A2.5	3.4	3.5	3.5	3.5	3.4	3.3	3.0	2.2	-	-	-
A5	4.2	4.4	4.6	4.8	4.9	4.9	5.0	4.9	4.7	3.8	1.1
D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3	5.7	1.6

Based on minimum light level of 0.2 lux

Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

SPARE PARTS					
	Battery	Lamp	Clevertest™ Node	Zoneworks® Node	Diffuser
PJE18M-40	1510100	3100175	8001730	8001450	PJED-R-SLIDE

Version: June 2014-3

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

www.clevertronics.com.au