

CLEVERFIT PRO® EXIT



LOW POWER CONSUMPTION - Energy efficient. As low as 3.3 Watt power consumption.

EASY INSTALL - Quick connect metal bracket for fast ceiling or wall mounting. Large terminal block & cable entry hole for easy installation.

LONG LIFE LED - Energy efficient, Long Life. Available in premium 100,000hr LED.

TESTING OPTIONS - Clevertest™, DALI compatible and Zoneworks® computerised testing options available in our Premium range.

The Cleverfit Pro® offers a practical solution in a slim-line, architecturally pleasing design.

With a slide connect, metal bracket and large terminal blocks the Cleverfit Pro® is suitable for most maintenance applications and offers easy installation.

As a one box solution current requirements have never been easier to meet. Our patented industry first, tamper-proof 'legend cover' makes it possible to include all diffuser options of 'exit' & 'pictograph' in one box for single-sided and double-sided needs. The Cleverfit Pro® becomes universal with a quick connect bracket for fast ceiling or wall mounting options.

For reliable performance, the Cleverfit Pro® is available in long life, energy efficient, high brightness LED.

ONE BOX SOLUTION - ALL OPTIONS*

AS2293 requirements have never been easier to meet with all diffuser options in one box.



Pick the correct decal



Slip it in



Clip it shut

As of 2005 the Australian Standard for emergency lighting requires all new applications and major refurbishments to have the 'pictograph' legend on an exit. It is still best practice to match 'EXIT' for 'EXIT' in a building built prior to this change.

*One box solution does not apply to theatre range of exits. See overleaf for options.

CLEVERFIT PRO® EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
LP - LED	CCFPRO	CCFPRO-CT	CCFPRO-DATA	CCFPRO-DALI	CCFPRO-ZW
L10 - LED	LCFPRO	LCFPRO-CT	LCFPRO-DATA	LCFPRO-DALI	LCFPRO-ZW

LP PREMIUM LED

Wall or ceiling quick connect exit, 100,000 hour LED, environmentally responsible, low maintenance, long life Lithium Iron Phosphate battery, 2 year back to base warranty, single and double sided and directional options configurable on site.

L10 OPTIMUM LED

Wall or ceiling quick connect exit, 100,000 hour LED, state of the art environmentally responsible Lithium Iron Phosphate battery with no heavy metals or carcinogens, 4 year back to base warranty, single and double sided and directional options configurable on site.

TESTING OPTIONS

clevertest	Exit and Emergency luminaires automatically test every six months.
DALI EM	Smooth integration and networking with DALI Lighting Control Systems.
ZONEWORKS	A real-time, automatic monitoring and testing facility for emergency luminaires.

SPECIFICATIONS

	Warranty	Power Consumption	C0	C90
CCFPRO	2 YEARS	3.3W	D4	E8
LCFPRO	4 YEARS	3.6W	D5	E10

SPACING TABLE & MOUNTING HEIGHTS


Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m
D4	7.2	7.3	7.3	7.3	7.3	7.2	6.9	6.5	5.8	3.1	-	-	-
D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3	5.7	1.6	-	-
E8	7.4	8.0	8.4	9.0	9.2	9.6	10.0	10.2	10.4	10.4	9.4	9.4	8.0
E10	7.8	8.4	9.0	9.4	9.8	10.2	10.8	11.2	11.4	11.8	11.6	10.2	10.4

Based on minimum light level of 0.2 lux


Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

SPARE PARTS

	Battery	Lamp	Clevertest™ Node	Zoneworks® Node
CCFPRO	1550130	8002250	8001730	8001450
LCFPRO	1530030	8002250	8001730	8001450

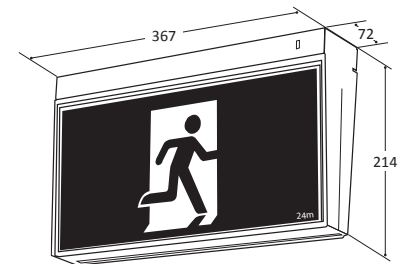

Dimensions (mm)



Ceiling Mount Wire Guard
Part number: 2530110
Dimensions (mm) L x W x H
407 x 267 x 190



Wall Mount Wire Guard
Part number: 2530050
Dimensions (mm) L x W x H
439 x 120 x 225



THEATRE VERSION AVAILABLE

- Available in Premium range
- Suitable for theatre environments only
- Spacing classifications for the Cleverfit Pro® do not apply

PART NUMBERS CCFPRO-TH-(DS-R)

R	PICTOGRAPH	EL	EXIT LEFT ARROW
RL	PICTOGRAPH LEFT ARROW	ER	EXIT RIGHT ARROW
RR	PICTOGRAPH RIGHT ARROW	DS	DOUBLE SIDED
E	EXIT		

Version: June 2014-3

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

www.clevertronics.com.au

 **Clevertronics**[®]
Emergency lighting innovation