

# SWINGBLADE® EXIT



**LOW POWER CONSUMPTION** - Energy efficient. As low as 3.5 Watt power consumption.

**EASY INSTALL** - Single-sided and double-sided options in one box with diffuser options to suit any application.

**LONG LIFE LED** - Energy efficient, Long Life. Available in premium 100,000hr LED.

**TESTING OPTIONS** - Clevertest™, DALI compatible and Zoneworks® computerised testing options available in our premium range.

Clevertronics has combined a number of key design features and technologies to create the Swingblade® surface mount exit.

A universal, blade style exit meets architectural requirements for a premium style exit without sacrificing ease of installation and long service life.

Swingblade® uses a flat panel diffuser with drop-in legend inserts secured by a patented tamper proof legend cover. All diffuser combinations of single-sided and double-sided, 'EXIT' or 'Pictograph' options can be configured on site from one box.

The Swingblade® surface mount exit is available in long life, energy efficient, high brightness LED lamp technology.

Available with the most environmentally friendly battery technology. Lithium Iron Phosphate batteries make our premium LED fittings the most reliable, low maintenance energy efficient exits on the market.

## ONE BOX SOLUTION - ALL OPTIONS\*

AS2293 requirements have never been easier to meet with all diffuser options in one box.



Pick the correct decal



Slip it in



Clip it shut

As of 2005 the Australian Standard for emergency lighting requires all new applications and major refurbishments to have the 'pictograph' legend on an exit. It is still best practice to match 'EXIT' for 'EXIT' in a building built prior to this change.

\*One box solution does not apply to theatre range of exits. See overleaf for options.

# SWINGBLADE® EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
<b>LP - LED</b>	CSBLED	CSBLED-CT	CSBLED-DATA	CSBLED-DALI	CSBLED-ZW
<b>L10 - LED</b>	LSBLED	LSBLED-CT	LSBLED-DATA	LSBLED-DALI	LSBLED-ZW

## LP PREMIUM LED

Surface mounted exit, 100,000 hour LED, environmentally responsible, low maintenance, long life Lithium Iron Phosphate battery, 2 year back to base warranty, compact low profile housing with unique rotating barrel mounted blade housing.


## L10 OPTIMUM LED

Surface mounted exit, 100,000 hour LED, state of the art environmentally responsible Lithium Iron Phosphate battery with no heavy metals or carcinogens, 4 year back to base warranty, twice the service life of the Nickel Cadmium battery, compact low profile housing with unique rotating barrel mounted blade housing.

## TESTING OPTIONS

<b>clevertest</b>	Exit and Emergency luminaires automatically test every six months.
<b>DALI EM</b>	Smooth integration and networking with DALI Lighting Control Systems.
<b>ZONENWORKS</b>	A real-time, automatic monitoring and testing facility for emergency luminaires.

SPECIFICATIONS				
	Warranty	Power Consumption	C0	C90
<b>CSBLED</b>	2 YEARS	3.5W	D8	E3.2
<b>LSBLED</b>	4 YEARS	3.8W	D8	E3.2

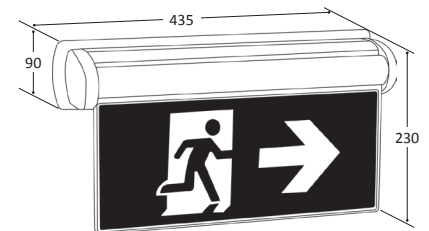


Dimensions (mm)

SPACING TABLE & MOUNTING HEIGHTS											
Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	5m	6m	7m	8m
D8	9.4	9.7	9.9	10.1	10.2	10.3	10.4	10.2	9.5	8.3	6.1
E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	-	-	-

Based on minimum light level of 0.2 lux

Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

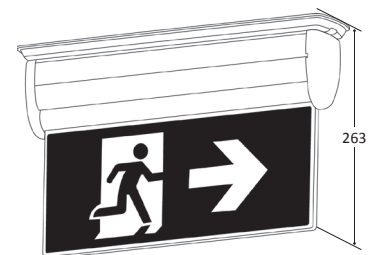

Dimensions (mm)

SPARE PARTS				
	Battery	Lamp	Clevertest™ Node	Zoneworks® Node
<b>CSBLED</b>	1550070	8002185	8001730	8001450
<b>LSBLED</b>	1530070	8002185	8001730	8001450

## THEATRE VERSION AVAILABLE



- Available in Premium range
- Suitable for theatre environments only
- Spacing classifications for the Swingblade® do not apply

## PART NUMBERS CSBLED-TH-(DS-R)

R	PICTOGRAPH	EL	EXIT LEFT ARROW
RL	PICTOGRAPH LEFT ARROW	ER	EXIT RIGHT ARROW
RR	PICTOGRAPH RIGHT ARROW	DS	DOUBLE SIDED
E	EXIT		

Version: June 2014-3

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

[www.clevertronics.com.au](http://www.clevertronics.com.au)