


# T5 L10™ OPTIMUM IP65 WEATHERPROOF BATTEN WITH HAWKEYE

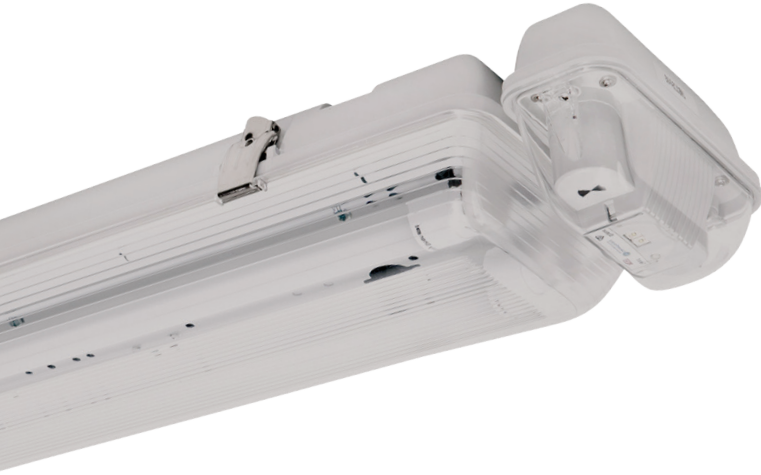

**UP TO 3 TIMES THE BATTERY LIFE** - Complete with L10™ Optimum lithium iron phosphate technology.

**HAWKEYE SENSOR** - HAWKEYE microwave movement sensor turns off the main light source when no presence is detected.

**WIDE BODY** - To cover junction boxes and provides ample space for heat generating components.

**TESTING OPTIONS** - Clevertest™, DLI compatible and Zoneworks® computerised testing options available in our Premium range.

The L10™ Optimum IP65 weatherproof batten with HAWKEYE is a non-maintained, C0=D63 C90=D50 classified surface mounted luminaire. Its features include an L10™ Optimum lithium battery which is housed in a thermal isolation pod at the end of the batten.

UP TO  
**3 TIMES**  
THE  
BATTERY LIFE

As the pod is external to the batten, the battery is protected from high temperatures that are normally found within the batten thereby extending battery life. This combination of lithium battery and thermally stable housing provides for up to three times the battery life, when compared to Premium NiCd products. Maintenance cost savings of up to 80% are achieved as there are less failures and hence labour costs over time.

UP TO  
**80%**  
MAINTENANCE  
SAVINGS

The battery is a lithium iron nanophosphate battery which contains no known carcinogens or heavy metal contaminants (unlike Nickel Cadmium and Nickel Metal Hydride batteries) and as they have three times the battery life they are the most environmentally responsible option.

L10™ Optimum lithium battens are available in either diffused, wire guard or IP65 weatherproof combinations, which address most emergency lighting applications including basement car parks, warehouses, fire stairs, industrial sites, commercial and public areas.

## HAWKEYE IS NOW AVAILABLE IN THE L10™ OPTIMUM BATTEN RANGE

UP TO  
**93%**  
ENERGY  
SAVINGS\*

The HAWKEYE microwave movement sensor is integrated into the body of the batten and is designed to turn off the batten's light source when no presence is detected by the sensor. The ability to turn the light source off when not required means less running time, saving energy and maintenance costs and money.



\*Based on 2x36W batten running 2 hours on per day with Hawkeye microwave sensor.

# T5 L10™ OPTIMUM IP65 WEATHERPROOF BATTEN WITH HAWKEYE

SEGMENT - LAMP TYPE	PART NUMBER - STANDARD 240V
Fluorescent Lamp	A2 Electronic Ballast
240V 1x14W	FWB114-P-A2-MS
240V 2x14W	FWB214-P-A2-MS
240V 1x28W	FWB128-P-A2-MS
240V 2x28W	FWB228-P-A2-MS
240V 1x35W	FWB135-P-A2-MS
240V 2x35W	FWB235-P-A2-MS

SPECIFICATIONS - STANDARD 240V	
Fluorescent Lamp	L x W x H (mm)
1x14W	655 x 160 x 105
2x14W	655 x 160 x 105
1x28W	1265 x 160 x 105
2x28W	1265 x 160 x 105
1x35W	1565 x 160 x 105
2x35W	1565 x 160 x 105

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS - L10 EMERGENCY BATTEN - NON MAINTAINED EMERGENCY POD			
A2 Electronic Ballast	Single-point	Clevertest™	DATA	Zoneworks
L10 1x14W SUSTAINED	LWB114S-P-A2-MS	LWB114S-P-A2-MS-CT	LWB114S-P-A2-MS-DATA	LWB114S-P-A2-MS-ZW
L10 2x14W SUSTAINED	LWB214S-P-A2-MS	LWB214S-P-A2-MS-CT	LWB214S-P-A2-MS-DATA	LWB214S-P-A2-MS-ZW
L10 1x28W SUSTAINED	LWB128S-P-A2-MS	LWB128S-P-A2-MS-CT	LWB128S-P-A2-MS-DATA	LWB128S-P-A2-MS-ZW
L10 2x28W SUSTAINED	LWB228S-P-A2-MS	LWB228S-P-A2-MS-CT	LWB228S-P-A2-MS-DATA	LWB228S-P-A2-MS-ZW
L10 1x35W SUSTAINED	LWB135S-P-A2-MS	LWB135S-P-A2-MS-CT	LWB135S-P-A2-MS-DATA	LWB135S-P-A2-MS-ZW
L10 2x35W SUSTAINED	LWB235S-P-A2-MS	LWB235S-P-A2-MS-CT	LWB235S-P-A2-MS-DATA	LWB235S-P-A2-MS-ZW

## SPECIFICATIONS - L10 OPTIMUM IP65 WEATHERPROOF BATTEN WITH NON MAINTAINED LED EMERGENCY POD

Fluorescent Lamp	L x W x H (mm)	C0	C90
1x14W	720 x 160 x 105	D63	D50
2x14W	720 x 160 x 105	D63	D50
1x28W	1330 x 160 x 105	D63	D50
2x28W	1330 x 160 x 105	D63	D50
1x35W	1630 x 160 x 105	D63	D50
2x35W	1630 x 160 x 105	D63	D50


## 240V AND L10 OPTIMUM

Wide body fluorescent batten. Wire guard or diffused body options to choose from.

240V and premium Nickel Cadmium emergency versions available. T5, 840 Tri Phosphor fluorescent lamps included.

## TESTING OPTIONS

 Exit and Emergency luminaires automatically test every six months.

 A real-time, automatic monitoring and testing facility for emergency luminaires.

## SPACING TABLE & MOUNTING HEIGHTS

Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	5m	6m	7m	8m	10m	15m	20m
D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	23.2	24.2	24.9	25.4	25.9	23.7	15.2
D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	25.2	26.4	27.4	28.1	28.9	28.0	22.5

Based on minimum light level of 0.2 lux

Version: October 2014-4

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

[www.clevertronics.com.au](http://www.clevertronics.com.au)

