

ULTRABLADE® EXIT



LOW POWER CONSUMPTION - Energy efficient. As low as 3.5 Watt power consumption.

EASY INSTALL - Single-sided and double-sided options in one box with diffuser options to suit any application.

LONG LIFE LED - Energy efficient, Long Life. Available in premium 100,000hr LED.

TESTING OPTIONS - Clevertest™, DALI compatible and Zoneworks® computerised testing options available in our premium range.

Clevertronics has combined a number of key design features and technologies to create the Ultrablade® recessed exit.

The sophisticated good looks of the Ultrablade® satisfy architectural requirements for a premium recessed exit without sacrificing ease of installation and long service life.

Ultrablade® uses a flat panel diffuser, identical to that used with the Clevertronics Swingblade® exit, with drop-in legend inserts secured by a patented tamper proof legend cover. All diffuser combinations of single-sided and double-sided, 'EXIT' or 'Pictograph' options can be configured on site from one box.

Its low profile housing and smart design means only 110mm of ceiling space is required for installation.

The Ultrablade® recessed exit is available in long life, energy efficient, high brightness LED lamp technology.

Available with the most environmentally friendly battery technology. Lithium Iron Phosphate batteries make our premium LED fittings the most reliable, low maintenance energy efficient exits on the market.

ONE BOX SOLUTION - ALL OPTIONS*

AS2293 requirements have never been easier to meet with all diffuser options in one box.



Pick the correct decal



Slip it in



Clip it shut

As of 2005 the Australian Standard for emergency lighting requires all new applications and major refurbishments to have the 'pictograph' legend on an exit. It is still best practice to match 'EXIT' for 'EXIT' in a building built prior to this change.

*One box solution does not apply to theatre range of exits. See overleaf for options.

ULTRABLADE® EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
LP - LED	CUBLED	CUBLED-CT	CUBLED-DATA	CUBLED-DALI	CUBLED-ZW
L10 - LED	LUBLED	LUBLED-CT	LUBLED-DATA	LUBLED-DALI	LUBLED-ZW

LP PREMIUM LED


Recessed exit, 100,000 hour LED, environmentally responsible, low maintenance, long life Lithium Iron Phosphate battery, 2 year back to base warranty, compact low profile gear tray needs only 110mm of ceiling space to install, supplied complete with integral flex and plug for quick installation.

L10 OPTIMUM LED

Recessed exit, 100,000 hour LED, state of the art environmentally responsible Lithium Iron Phosphate battery with no heavy metals or carcinogens, 4 year back to base warranty, twice the service life of the Nickel Cadmium battery, compact low profile gear tray needs only 110mm of ceiling space to install, supplied complete with integral flex and plug for quick installation.

TESTING OPTIONS

clevertest	Exit and Emergency luminaires automatically test every six months.
DALI EM	Smooth integration and networking with DALI Lighting Control Systems.
ZONENETWORKS	A real-time, automatic monitoring and testing facility for emergency luminaires.

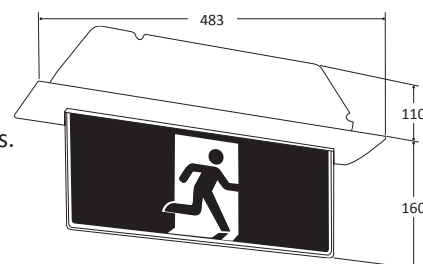

Dimensions (mm)
Ceiling cutout 430 x 70 (mm)

SPECIFICATIONS

	Warranty	Power Consumption	C0	C90
CUBLED	2 YEARS	3.5W	D5	E3.2
LUBLED	4 YEARS	3.8W	D5	E3.2

SPACING TABLE & MOUNTING HEIGHTS

Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m
D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3	5.7	1.6
E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	5.8	-	-

Based on minimum light level of 0.2 lux

Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

SPARE PARTS

	Battery	Lamp	Clevertest™ Node	Zoneworks® Node
CUBLED	1550050	8002175	8001730	8001450
LUBLED	1530050	8002175	8001730	8001450

THEATRE VERSION AVAILABLE



- Available in Premium range
- Suitable for theatre environments only
- Spacing classifications for the Ultrablade® do not apply

PART NUMBERS CUBLED-TH-(DS-R)

R	PICTOGRAPH	EL	EXIT LEFT ARROW
RL	PICTOGRAPH LEFT ARROW	ER	EXIT RIGHT ARROW
RR	PICTOGRAPH RIGHT ARROW	DS	DOUBLE SIDED
E	EXIT		

Version: June 2014-3

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

www.clevertronics.com.au

 **Clevertronics**[®]
Emergency lighting innovation