

GIGANTOR EXIT



80m VIEWING DISTANCE - 510mm high pictograph.

AS2293.2005 COMPLIANT - Available with 'Pictograph' or 'Exit' legends to match old installations and meet requirements.

TESTING OPTIONS - Clevertest™, DALI compatible and Zoneworks® computerised testing options available in our Premium range.

Clevertronics' Gigantor exit caters for applications requiring viewing distances of up to 80 meters, not covered by conventional 24m exits.

Perfect for stadium and large hall usage, the Gigantor exit uses a 510mm high pictograph for viewing distances up to 80 meters. Featuring robust steel housing, suitable for wall mounting applications.

Switchmode electronics and a dual-rate charge, high temperature Nickel Cadmium battery combination ensure maximum reliability.

SAVE TIME AND MONEY - UPGRADE TO CLEVERTEST™

LOWER INSTALLATION COSTS
LOWER TESTING COSTS

Emergency lights that perform their six monthly discharge tests by themselves, and indicate their status via a bi-colour flashing LED. No need for a manual test-switch.

EMERGENCY LIGHTS THAT TEST THEMSELVES!

clevertest™



GIGANTOR EXIT

SEGMENT - LAMP TYPE	PART NUMBER & TESTING OPTIONS				
	Single-point	Clevertest™	DATA	DALI EM	Zoneworks®
PREMIUM - WM - R	PGE236M-80-WM-R	DGE236M-80-WM-R	ZGE236M-80-DATA-WM-R	ZGE236M-80-DALI-WM-R	ZGE236M-80-WM-R
PREMIUM - WM - E	PGE236M-80-WM-E	DGE236M-80-WM-E	ZGE236M-80-DATA-WM-E	ZGE236M-80-DALI-WM-E	ZGE236M-80-WM-E

For directional options please add L or R to above codes for Left or Right Arrow i.e PGE236M-80-WM-RL

PREMIUM

Wall mounted exit, 36W fluorescent lamp, dual-rate charge high temperature Nickel Cadmium battery, 2 year back to base warranty, single sided, running man pictogram or EXIT decal, directional options indicated.

TESTING OPTIONS

clevertest	Exit and Emergency luminaires automatically test every six months.
DALI EM	Smooth integration and networking with DALI Lighting Control Systems.
ZONENETWORKS	A real-time, automatic monitoring and testing facility for emergency luminaires.

SPECIFICATIONS

	Warranty	Power Consumption	C0	C90	C180
PGE236M-80	2 YEARS	78W	D5	A5	A2.5

SPACING TABLE & MOUNTING HEIGHTS


Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m
A2.5	3.4	3.5	3.5	3.5	3.4	3.3	3.0	2.2	-	-	-
A5	4.2	4.4	4.6	4.8	4.9	4.9	5.0	4.9	4.7	3.8	1.1
D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3	5.7	1.6

Based on minimum light level of 0.2 lux

Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS2293.1 2005

SPARE PARTS

	Battery	Lamp	Clevertest™ Node	Zoneworks® Node
PGE236M-80	1510090	3100380	8001730	8001450

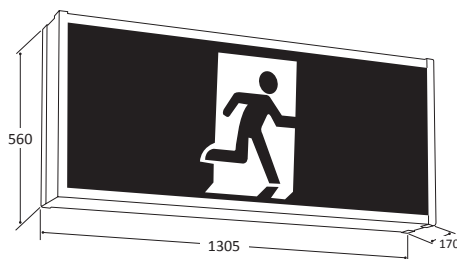

Dimensions (mm)

Version: June 2014-3

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.

www.clevertronics.com.au