

2022 Product Catalogue





Contents

About Clevertronics	4-9
Key Product Selection Criteria	10-11
Ranges	12-17
EL Economy	12
LP Premium	12
L10 Nanophosphate®	14
Testing & Monitoring Systems	18-36
Clevertest Plus System	20
Zoneworks® XT HIVE	24
DALI	36
Case Studies	38-43
Clevertest Plus System	38
Zoneworks® XT HIVE	40
L10 Nanophosphate®	42
Products	44-173
Exits	44
Dynamic Exit Signage	70
Emergency Lights	80
Circulars & Bulkheads	106
Battens	116
24V Temporary Range	162
Spacing Tables	174-191
Emergency Modes of Operation	192
Chemical Resistance Table	193
Cleverfacts	194-196

Our Vision

To be known as the most reliable and trusted emergency lighting company in the world.

Our Mission

To make emergency lighting easy by designing world-class products that are supported with unrivalled expertise and customer service.



We make Emergency Lighting easy.

Our mission to make emergency lighting easy will continue to drive us to develop the best outcomes for all involved. With our dedicated research and development engineers, Clevertronics is positioned to continue leading the world in emergency lighting solutions.



Clevertronics is an Australian emergency lighting specialist that operates across Australia, New Zealand and the United Kingdom.



Whether you're a specifier, facility manager, end user, or electrical contractor, our goal is to ensure that we understand your needs and assist you in delivering the outcomes you're after.

Clevertronics has built a global reputation for our innovation and leadership in emergency lighting over the past twenty years. Our recent release of the latest Zoneworks XT HIVE system is a major game changer, simplifying every step of the emergency lighting process and, most importantly, reducing the total cost of compliance.

However, what I am most proud of is the culture of customer care that exists throughout the entire company. Our customers remain our main priority, and our goal is to deliver you the highest level of product quality, service and support.

We look forward to sharing our continued success with you.

Tony Todaro

Tony Todaro
Managing Director and Owner

We are the home of Emergency Lighting

Clevertronics is an Australian emergency lighting specialist that operates across Australia, New Zealand and the United Kingdom. Our head office located in Melbourne features state-of-the-art product development and manufacturing to support the continuing growth of the business.





We Embrace and Lead Innovation

Innovation features in many parts of the business, including luminaire design and functionality, world-class monitoring systems, and how we support customers to learn, source, install and manage emergency lighting. One of the ways our technologies have changed the lighting world is the release of our L10 Lithium Nanophosphate range which revolutionised the global emergency lighting market in 2012. Traditionally emergency lighting maintenance costs have been expensive to manage due to battery life resulting in non-compliance. However, the introduction of the L10 Nanophosphate range delivered an exit, emergency and weatherproof batten range that took lifetimes from four years to twelve years, resulting in over 80% maintenance savings compared to the available alternatives.

Our Systems

Managing the compliance of emergency lighting is critical and to do this effectively Clevertronics developed a world-leading automatic monitoring & testing system in Zoneworks XT HIVE. The Zoneworks platform is installed in over 1500 sites around Australia, New Zealand and the UK and is backed by an Advantage Lifetime Support program designed to help the building owner & maintenance contractor manage on-going emergency lighting and associated costs.

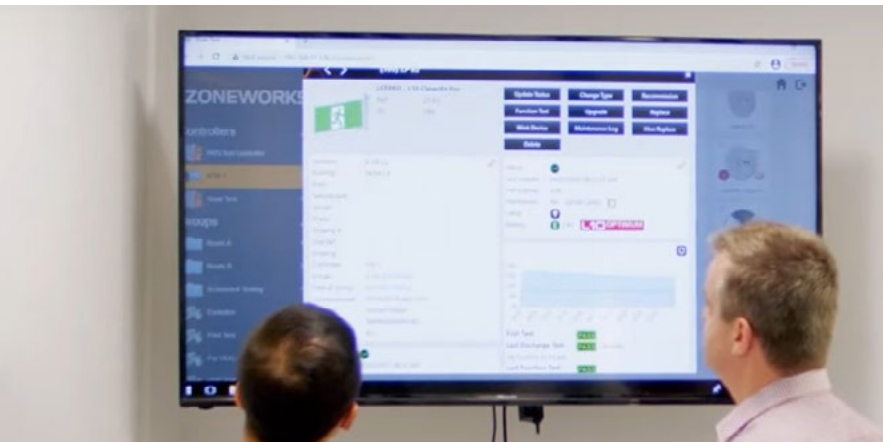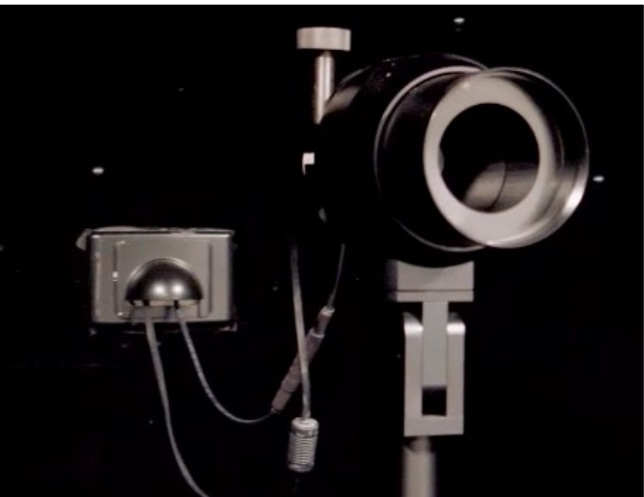

Our Unique Capabilities

We design, prototype and test all our luminaires and systems from our new state-of-the-art head office in Melbourne, Australia. Our research and product development area consists of photometric laboratories, thermal testing chambers and long-term elevated temperature test rooms which assist us in releasing product to market in a fast and effective manner. We have manufacturing capabilities in Melbourne and Shanghai, catering to high volume and specialised requirements.

Our Expertise


Our extensive expertise in understanding emergency lighting standards and application requirements has resulted in 1000's of specialised luminaires being designed and manufactured for installation in projects like tunnels, heritage buildings, places of interest, harsh environments, stadia, rail infrastructure and many other applications. If you have a challenging application, we will be excited to create a solution for you.

Our Projects

Clevertronics has supported our customers in the process of installing and upgrading emergency and exit lighting in thousands of small, medium and large sized facilities across Australia and New Zealand. All projects are given the support they require no matter what size. Customer satisfaction is of utmost importance to the Clevertronics team.

We are proud to be installed in many landmark facilities in Australia including the Sydney Opera House, Melbourne Cricket Ground and Optus Stadium, as well as major hospitals, shopping centres, universities, correctional facilities and high-rise developments.

When you are installing or upgrading emergency lighting, you want the process to be easy, and Clevertronics delivers on this every time.

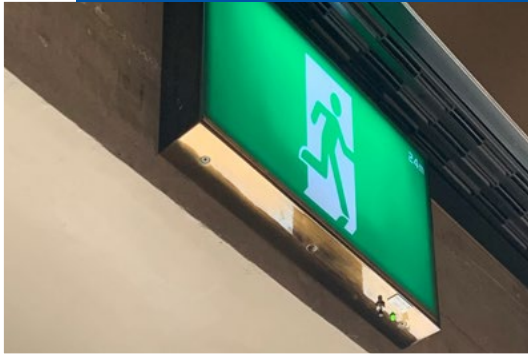

Our Emergency Lighting Solutions

Clevertronics have a wide range of exit, emergency, circulars, bulkheads and battens to satisfy various applications and industries. Whether you require architectural, weatherproof, low temperature, or a custom luminaire for a specific requirement, we are here to support you. All our luminaires are tested and comply with AS/NZS2293 standards.

The Clevertronics Project Advantage

Many projects require custom designed product, finishes or specific performance requirements. Our team of product and system engineers lead the emergency lighting world in many areas and are ready to apply that expertise to your project.

Experts in Engineering a Solution

Clevertronics has in-house thermal and photometric testing facilities which enables us to test and evaluate custom products and retro-fit conversions prior to any formal certification. Clevertronics can manage the official testing and approval process for third party fit-outs if required.



Comprehensive Range

Our full product offering is extensive. We have three dedicated ranges, Economy, LP and L10 spanning all emergency, exit and batten luminaires. All LP & L10 ranges are available with testing options including Clevertest Plus, Zoneworks XT HIVE, and DALI. This is supplemented by the ability to build custom project specific fittings and conversion of 3rd party fittings where required.



Geographical Coverage

Our offices in Melbourne, Sydney, Brisbane, Adelaide, Perth, Auckland and Christchurch have dedicated customer service and technical resources ready to support you on your next emergency lighting project or enquiry.



Key Product Selection Criteria


1 Select Your Range

- EL, LP & L10

2 Select Test Option

- ClevertestPlus System
- Zoneworks XT HIVE
- DALI

3 Select Type & Style

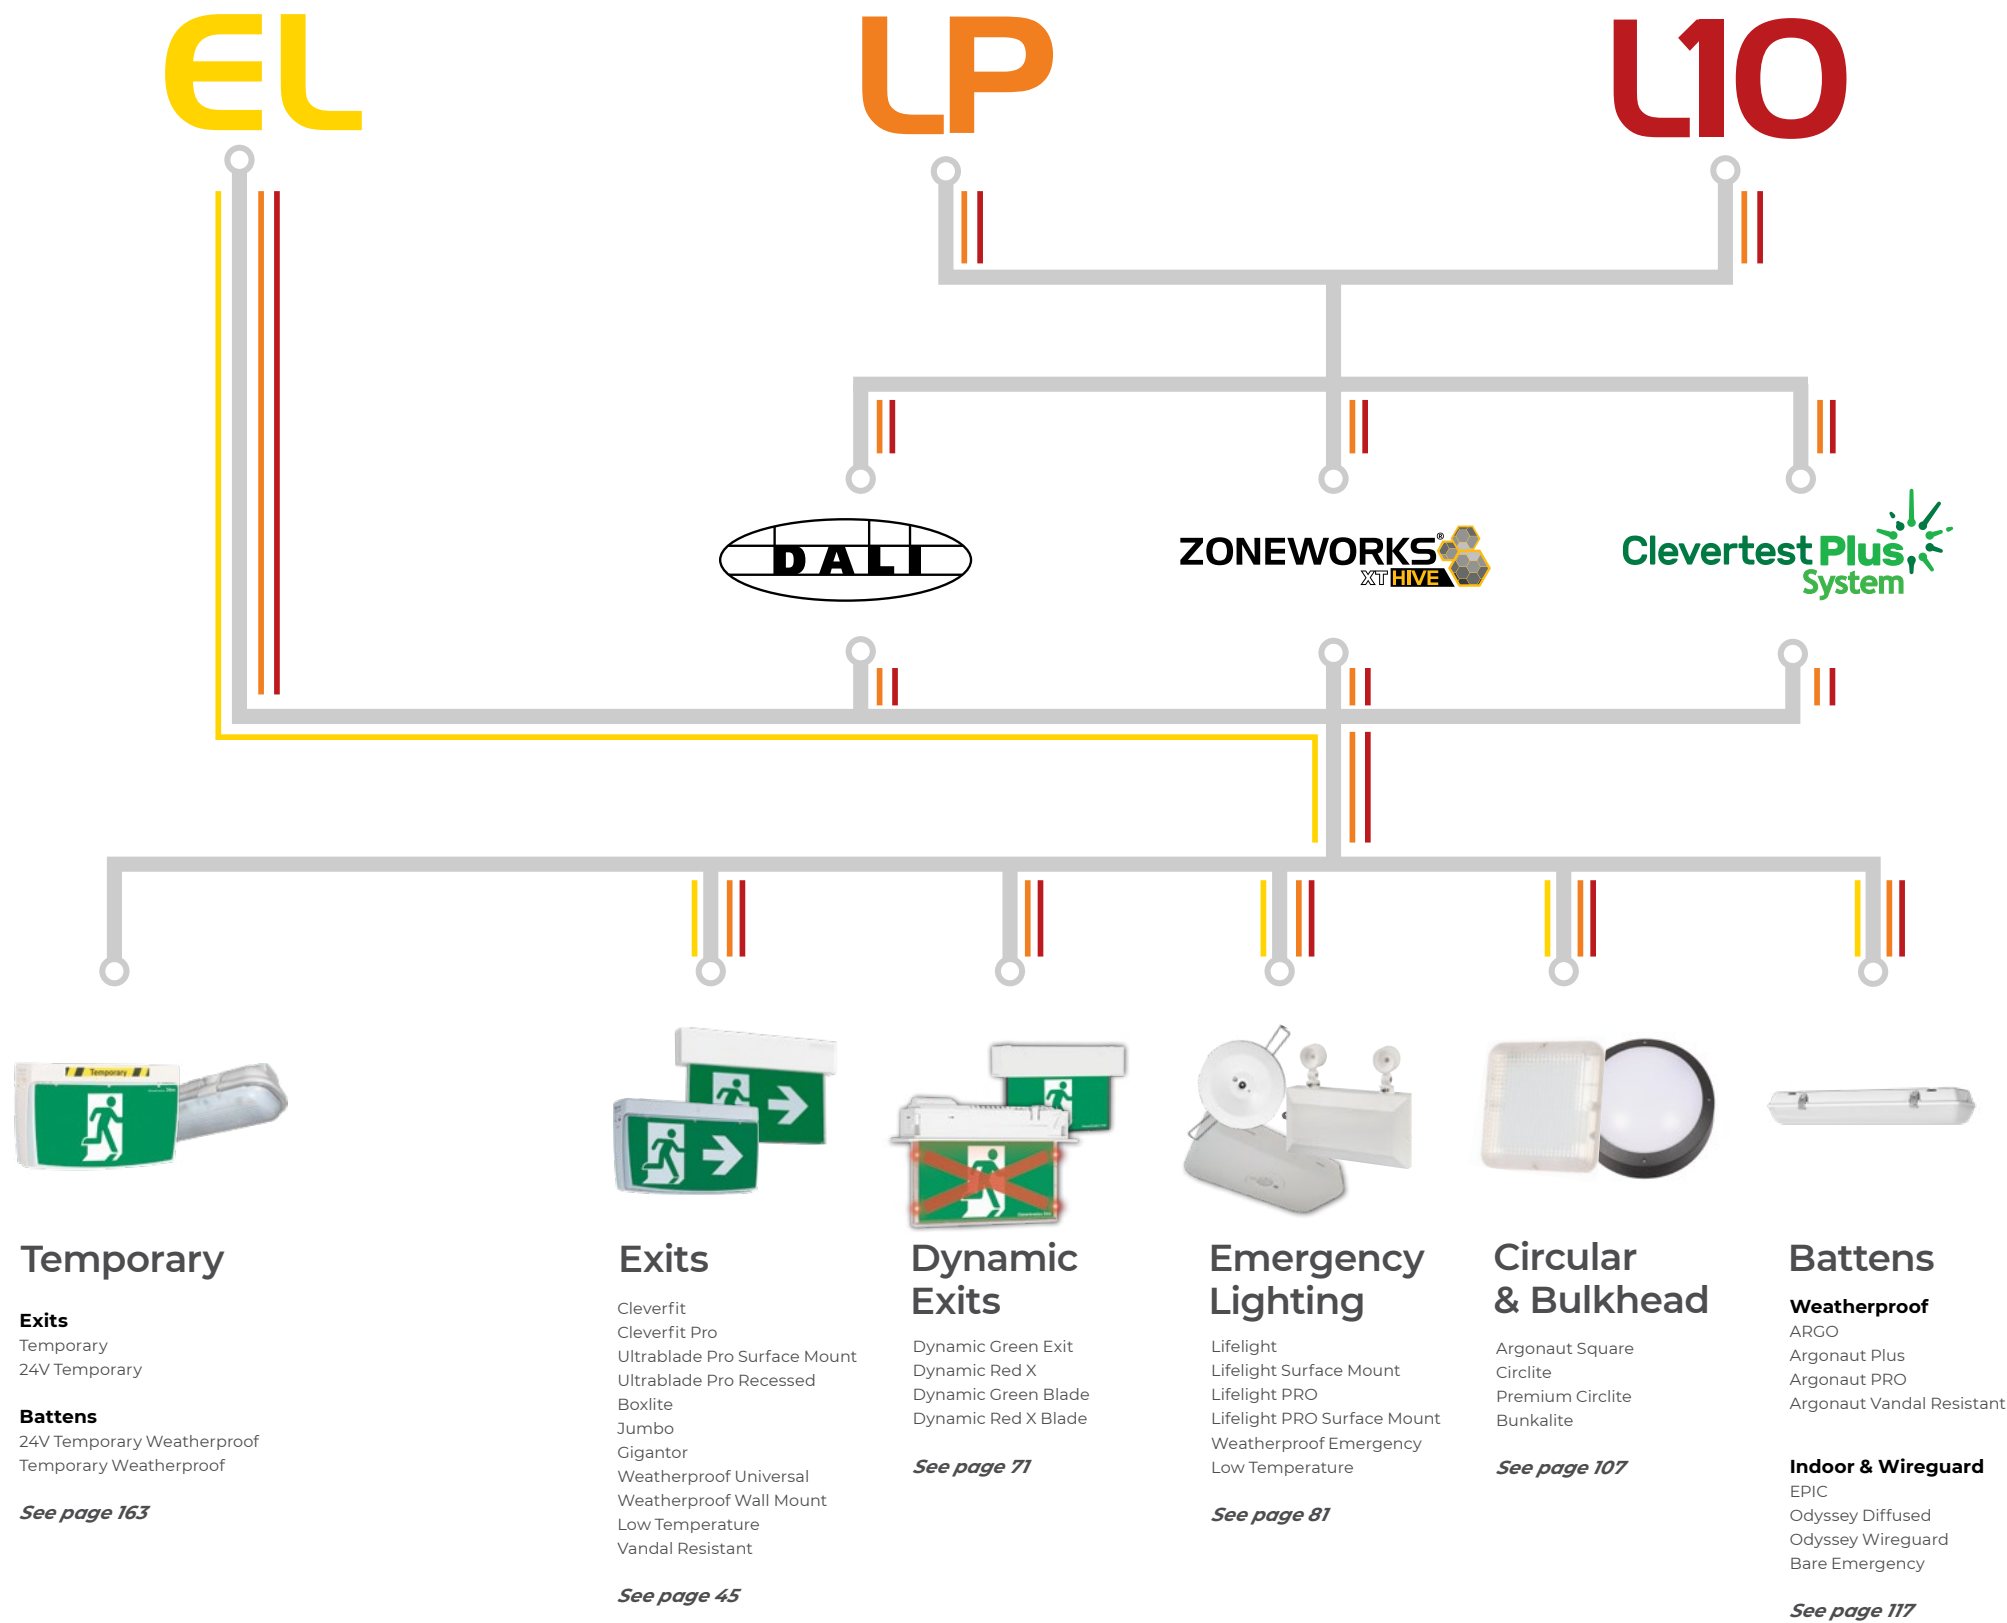

Selecting the Right Lithium Powered Product

There are many types of batteries used in emergency lighting and it is important to understand the strengths and weaknesses of each battery chemistry to ensure you can get maximum value from your product.

Older battery technology such as Sealed Lead Acid, Nickel Metal Hydride and Nickel Cadmium provide inferior performance and carry significant environmental impacts compared to Lithium Iron Phosphate (LiFePO4) batteries.

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

- **Lithium performance at the same price as NiCd & NiMH***
- **Lower maintenance costs**

The Clevertronics Economy Lithium range has been designed to provide the lowest upfront cost at the same price as NiCd and NiMH while providing increased performance and lower maintenance costs.

*Compared to Clevertronics NiCd range

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

- **Australia's No1 selling emergency lighting range**
- **Over 50% maintenance savings vs NiCd**
- **Standard Clevertest Plus**

The LP range is the proven project performer that combines Lithium Iron Phosphate battery technology with premium electronics and LED technology.

Available with Zoneworks® and DALI® testing options.

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM


NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

- **Lowest total ownership cost**
- **50% longer battery life vs any other lithium product**
- **60% maintenance savings vs any other lithium product**
- **Over 80% maintenance savings vs NiCd**
- **Standard Clevertest Plus**


Nothing else competes with L10 Nanophosphate®, due to the structure of the Nanophosphate chemistry enabling higher power, increased abuse tolerance and longer life compared to other Lithium Iron Phosphate offerings.

Available with Zoneworks® and DALI® testing options.

Comparisons*

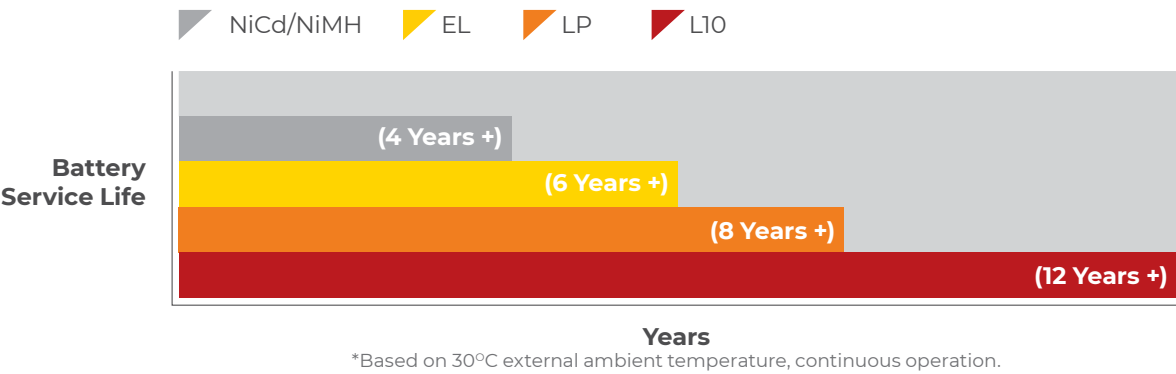

Range cost of ownership*

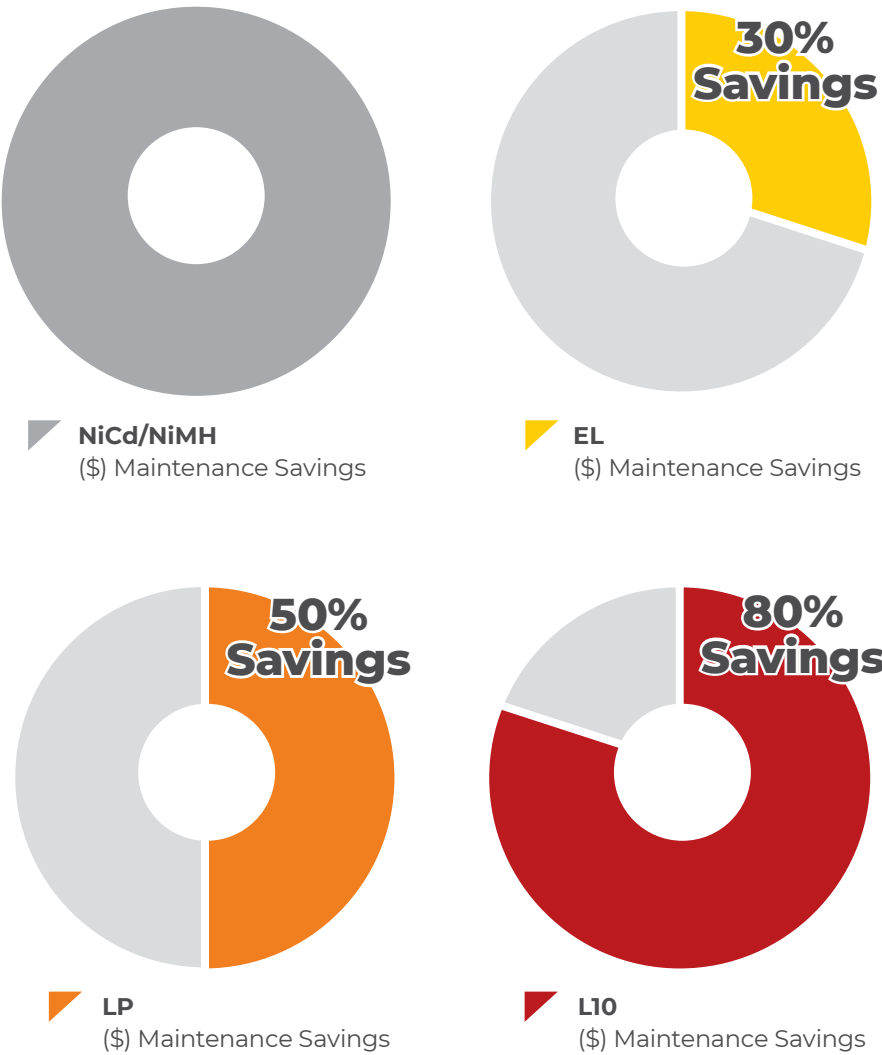

*Exit and emergency fittings are replaced when either battery or PCB fails

L10 Lithium Nanophosphate®

The first and only Nanophosphate® powered product on the market

- Lowest total ownership cost
- 50% longer battery life vs any other lithium product
- 60% maintenance savings vs any other lithium product
- Standard Self Test



The L10 advantage

Clevertronics were global pioneers when they launched the L10 Nanophosphate range of products in 2012 incorporating Lithium Nanophosphate® battery technology which was the world’s first lithium powered product on the market. The L10 range has proven to be a significant influence on the market due to the incredible maintenance savings that have been realised. The range is comprehensive and covers Exit and Emergency luminaires as well as a full range of Battens so you can ensure the facility can take full advantage of the savings available.

Since launch, over one million L10 Nanophosphate fittings have been installed into 100’s of sites across Australia and NZ including, Melbourne Cricket Ground, Perth Children’s Hospital, Barangaroo Reserve, Legacy Way Tunnel and Etihad Stadium, and on-site real world results are exceeding bench-test performance predictions by a significant margin. Clevertronics Zoneworks XT HIVE monitoring system provides unprecedented visibility into on-site product and maintenance performance, which assists facility managers in achieving compliance and helps Clevertronics in our drive for further innovation.


Testing and Development

Together with over ten years of bench-testing data at elevated temperatures and on-site “torture testing” with specific trial-site partners, Clevertronics has cemented its position as the world leader in lithium powered emergency lighting with its L10 range powered by Nanophosphate technology.

To understand the challenges of incorporating an LFP battery into an Emergency light and why long term testing and making it work in harmony with the total product is vital to ensure long term reliability, Michael Duce – National Systems and Engineering Manager from Clevertronics, provided some insight. “When we were embarking on this project, we knew the reliability of the product was centred around the impact heat would have on the components inside the emergency luminaires, so we put significant resources into redesigning products to place batteries away from heat sources. In the case of batten luminaires, we developed a thermally isolated section or POD at the end of the batten to house the LFP battery, and the emergency LED light source.”

Testing was rigorous and Michael and his Australian-based team spent over two years testing the product before it was released on the market in 2012. Michael adds further details about managing the project.

“The second challenge was to ensure we could incorporate the battery into the various range of fittings. Our customers needed a complete range of Emergency, Exits and Battens fittings for their projects and to realise the 80% plus maintenance savings from the L10 range we needed to deliver the entire range as a package. This was challenging from an engineering perspective due to the massive scale of the development task given the large number of different products in our range. It meant that we had to structure the development team to work on several product families concurrently and work very closely with the Production Team to ensure a smooth transition to full-scale production. To see the results now provides great satisfaction especially being the global innovators.”

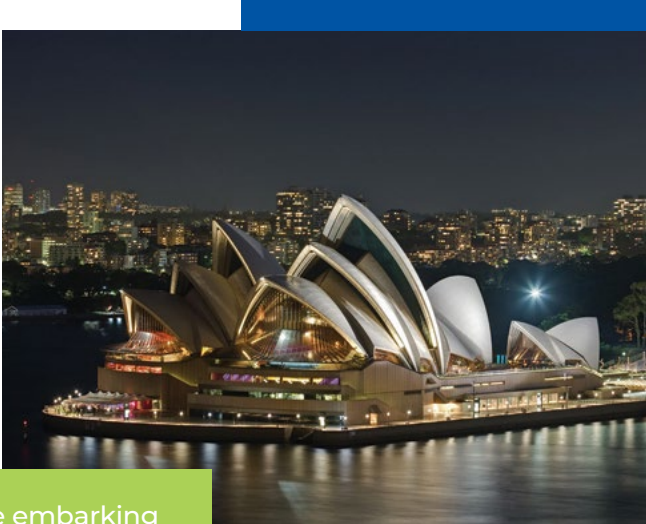

“When we were embarking on this project, we knew the reliability of the product was centred around the impact heat would have on the components inside the emergency luminaires, so we put significant resources into redesigning products to place batteries away from heat sources.”



So what is Lithium Nanophosphate?

Nanophosphate® is a registered trademark for a Lithium Iron Phosphate battery technology that maximises the performance of the standard technology. The three main areas where Lithium Nanophosphate has distinct advantages over other Lithium Iron Phosphate batteries are listed below.



Power – Nanophosphate is a positive electrode material of remarkable rate capability, critical to high power systems. High power products are able to pulse at discharge rates as high as 100°C and deliver superior power by weight or volume in a cost-effective solution. With their low impedance and thermally conductive design, high power cells can be continuously discharged at a 35°C rate, a marked improvement over other rechargeable battery alternatives, and have consistent power over a wide state of charge (SOC) range.

Safety – Safety begins with chemistry and Nanophosphate is stable chemically, which provides the foundation for safe systems while meeting the most demanding customer requirements. Multiple layers of protection are employed at the chemistry, cell and system level to achieve an energy storage solution with superior safety and abuse tolerance compared to metal oxide lithium-ion chemistries.

Life – Nanophosphate technology delivers exceptional calendar and cycle life. At low rates our cells can deliver thousands of cycles at 100% depth of discharge (DOD), a feat unmatched by most commercial lithium ion cells. Even when cycled at 10°C discharge rates, cells deliver in excess of 1,000 full DOD cycles. Not only does the technology retain its energy, it also retains its power capability. Not all lithium-ion technologies behave the same. The nanoscale structure of the Nanophosphate chemistry, for example, enables battery systems with higher power, increased abuse tolerance, longer life and the greater ability to maintain consistent power over a wide range of state-of-charge (SOC) as compared with competing lithium-ion and other chemistries. Understanding the fundamental chemical differences between Nanophosphate and other technologies is



necessary to develop a complete and accurate assessment of the optimal advanced battery system that will deliver the best performance for a given application.

L10 Nanophosphate Lithium Battery

The Lithium Iron Phosphate battery technology has been available for over 15 years. However, significant technological breakthroughs in the early-2000s by leading manufacturers of these cells has provided the advanced properties which now sees this as the battery technology of choice for such applications as electric cars, emergency lighting, power drills, and computers. The L10 Nanophosphate range utilises a Lithium Iron Phosphate battery that has significant improvements due to the Nanophosphate advantage.

At Clevertronics, we also believe that when comparing different emergency lighting products, it is important to ensure the technology is comparable as not all emergency lighting powered with Lithium Iron Phosphate batteries will perform at the same level. It is, therefore, critical to ask to see the performance from actual site results to give you the complete story.

There's a real difference when the results are in!



What emergency lighting compliance system is right for me?



Clevertest Plus (CTP) system is suitable for the simplest and smallest of sites, right through to medium and large installations where compliance and low ownership costs are important. The CTP system replaces the manual testing of emergency lighting, with self test fittings and includes the CleverSparky Electronic log book app for your phone and PC.

Managing Emergency lighting compliance across multiple sites? CleverSparky helps to manage contractor access, view the schedule for upcoming tests and is the perfect tool for managing local and national contracts with large numbers of outlets.



Zoneworks XT HIVE is the most advanced emergency lighting system in the world. Utilising Dynamic self-managed meshing allows the simplest RF backbone set up for any site.

Every Zoneworks XT HIVE system is backed by the Clevertronics Advantage Lifetime Support program which is designed to help the building owner and maintenance contractor manage the health of the system at no additional cost.

What emergency lighting compliance system is right for me?			
	MANUAL	CTP SYSTEM	ZONEWORKS XT HIVE
Simple Fitting Installation	✓	✓	✓
RF Controller			✓
Automatic Testing		✓	✓
Automatic Results Collection			✓
Auto Faulty Fittings Report		✓	✓
Electronic Reports		✓	✓
Electronic Maintenance Log		✓	✓
Network or Cloud Access Reports		✓	✓
Precise Test Time Configuration			✓
Remote System Access and Configuration			✓
BMS Integration			✓
Real-Time Site Alerts			✓
Dynamic Self-Managed Meshing Capabilities			✓
ALS Lifetime Support			✓



Marvel Stadium has 2756 fittings that are monitored by Zoneworks XT




St Vincent's Care Service in Towoomba has 73 fittings utilising the CTP System



The lowest cost emergency lighting system on the market

The Clevertest Plus (CTP) system is designed to provide building owners and electrical contractors with a cost-effective and thorough means of managing emergency lighting and has proven to reduce duration test collection times by 60% vs traditional manual testing.

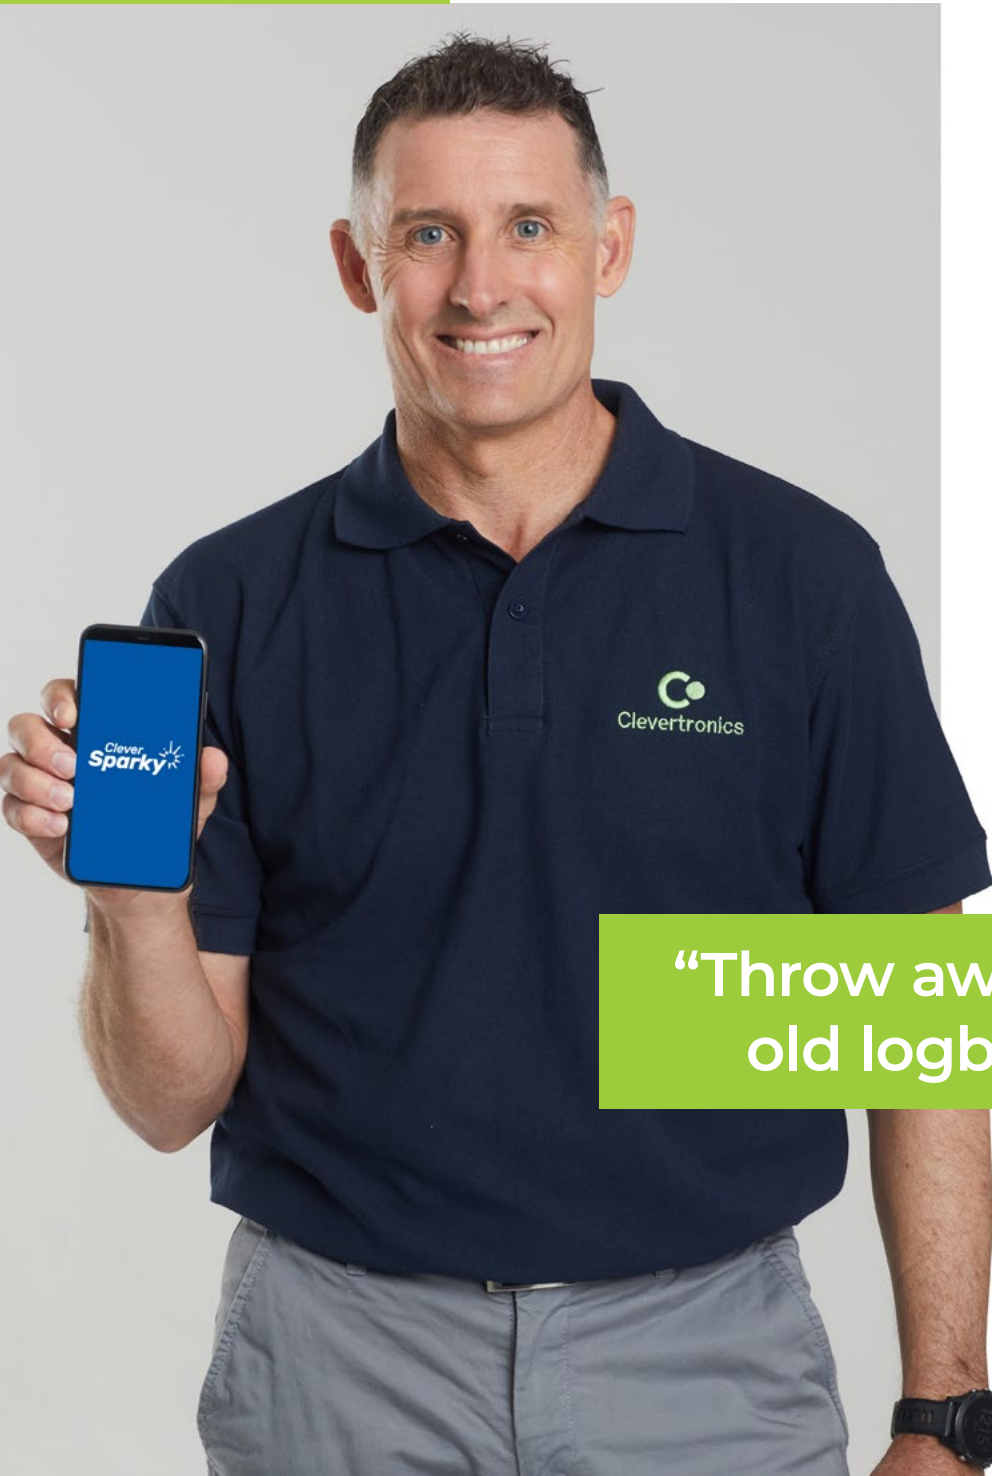

“Throw away that old logbook”

Michael Hussey
Australian Cricket Legend
& Clevertronics Ambassador

The Clevertest Plus System will provide more accurate testing by ensuring no fittings are missed during a logbook test.

Despite our connected world, the vast majority of new installs continue with manually tested fittings and paper-based compliance reports which are time-consuming, inefficient, often inaccurate and difficult to access. To overcome these issues, the Clevertest Plus System brings automatic testing, site management and compliance reporting to the mobile world; your accurate site information will now be available where you want it and when you want it.

Features and Benefits of the Clevertest Plus System

- Fittings automatically test every six months
- Complies with AS/NZS 2293.2 automatic testing requirements
- Compliance reporting available instantly on phone or web portal
- No need for any paper-based log book
- Upcoming test due date dashboard on the CleverSparky Web app
- Manage multiple sites under one account
- No need for a data cable, wireless connection or centralised PC
- Provides an accurate diagnosis of lamp, battery or control gear for each faulty fitting
- Does not require a test switch at the switchboard

What do I need for the CleverTest Plus System?





The Clevertest Plus System (CTP) allows you to manage Emergency Lighting compliance with ease, saving you time and money.

Step 1

Activate the CTP self-test function on each luminaire. Each fitting will automatically perform a duration test every 6 months removing the need for expensive manually activated testing.




At the fitting
or
At the breaker



Step 2

Use the CleverSparky mobile app or the CleverSparky web interface to build your site database.

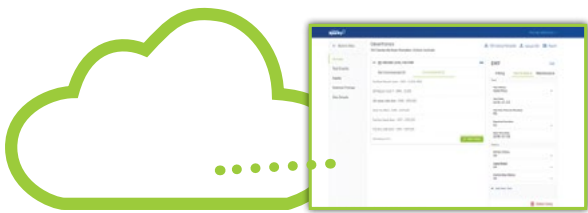


cleversparky.com



Step 3

Use Quick Collect to rapidly gather the test results or scan a fitting to see detailed test or fault information.

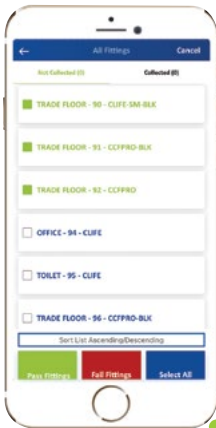


Quick collect
or
LED scan



Step 4

Instantly produce detailed and professional compliance reports, customised with a business logo and digital signature.

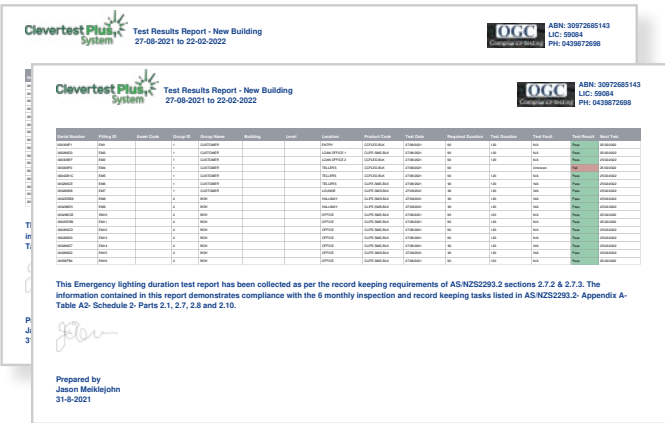

Download from the App Store or Google Play



Download the testing app, CleverSparky® from the App store or Google Play.

Download the Guide

Download the CTP System operation guide at clevertronics.com.au



Zoneworks is the world’s most advanced emergency lighting system with over 1,500 sites installed across Australia, New Zealand and the UK.

The introduction of Zoneworks XT HIVE has redefined the way emergency lighting is designed, installed and managed, making it the most advanced system on the market.

Zoneworks XT HIVE reduces the backbone hardware requirements to a single RF controller and adds dynamic self-managed meshing technology to make your emergency lighting simpler, faster and easier than ever before.


- If you are designing an emergency lighting system, it is **simpler**
- If you are installing and commissioning emergency lighting, it is **faster**
- If you are managing emergency lighting, it is **easier**

Zoneworks XT HIVE will continue to be supported by a team of Advantage Lifetime Support specialists that ensure each system is looked after for its lifetime at no additional cost. It’s just what we do.



Faster

Design, Install, Commissioning,
Testing & Maintenance




Lower Cost

Installation & Operation

Zoneworks XT HIVE features the absolute simplest RF backbone set up for any site.

- One single RF controller per 1,000 fittings
- Unlimited fittings per system
- Powerful Sub-GHz radio frequency
- Industry grade encryption and site security
- Highest data throughput and performance

Less backbone = Less cost

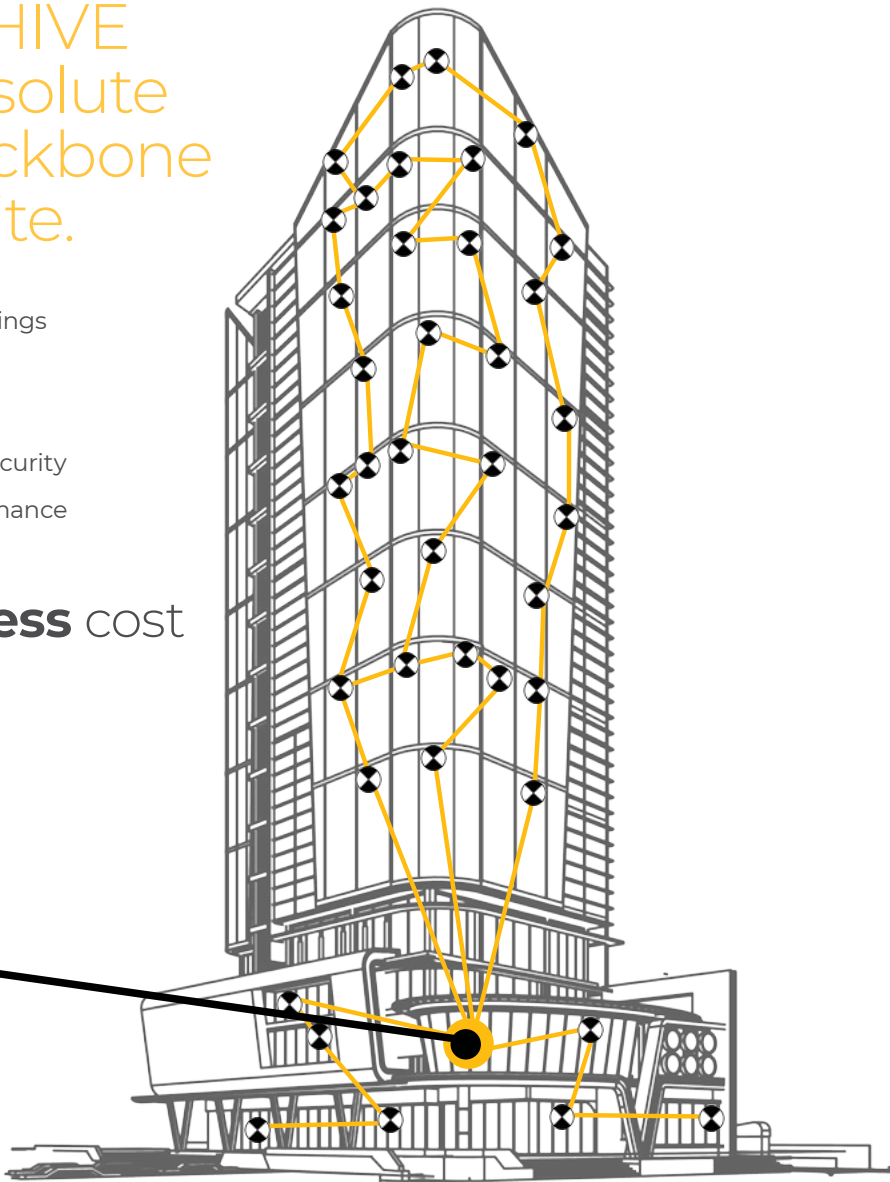

*1000 fittings per controller, unlimited fittings per system.
Location of the controller is flexible & can be moved should the need arise.

Zoneworks XT HIVE is simple because you DON’T NEED to purchase & install:

- | | |
|-------------------------------|-------------------------------|
| ✗ Additional Routers | ✗ Additional Couplers |
| ✗ Additional Controller | ✗ Additional Data Points |
| ✗ Additional Repeaters | ✗ Data Cable Between Fittings |
| ✗ Additional Networking Cable | ✗ Additional Extenders |



Unmatched
Simplicity



Unmatched
Performance

Dynamic Self-Managed
(DSM) Meshing

- Every fitting self-discovers other fittings around it to form “colonies” that dynamically build the network
- These colonies only communicate with each other and will not interfere with other wireless networks, even if they are on the same frequency
- Maximising the efficiency of the overall network
- Minimising commissioning and system management time




Zoneworks XT HIVE Backbone & Connectivity

Zoneworks XT HIVE is fast, simple and smart, allowing you to save time and costs across design, installation, commissioning and testing.


1. Automatically Mesh Devices

Once HIVE fittings are installed and powered up they automatically create a network by self-discovering others around them using dynamic self-managed meshing (DSM Meshing), saving valuable commissioning time.

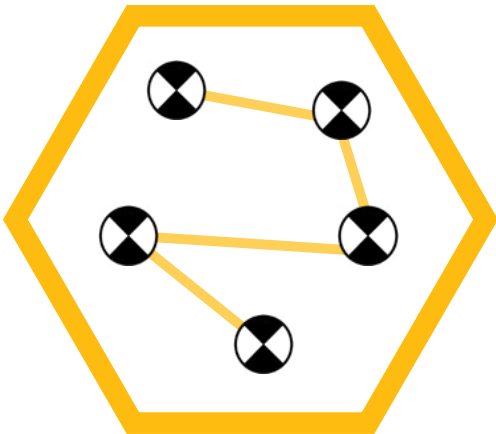


2. Enable the Controller

Switch on the controller to provide access and control of the emergency lighting system.

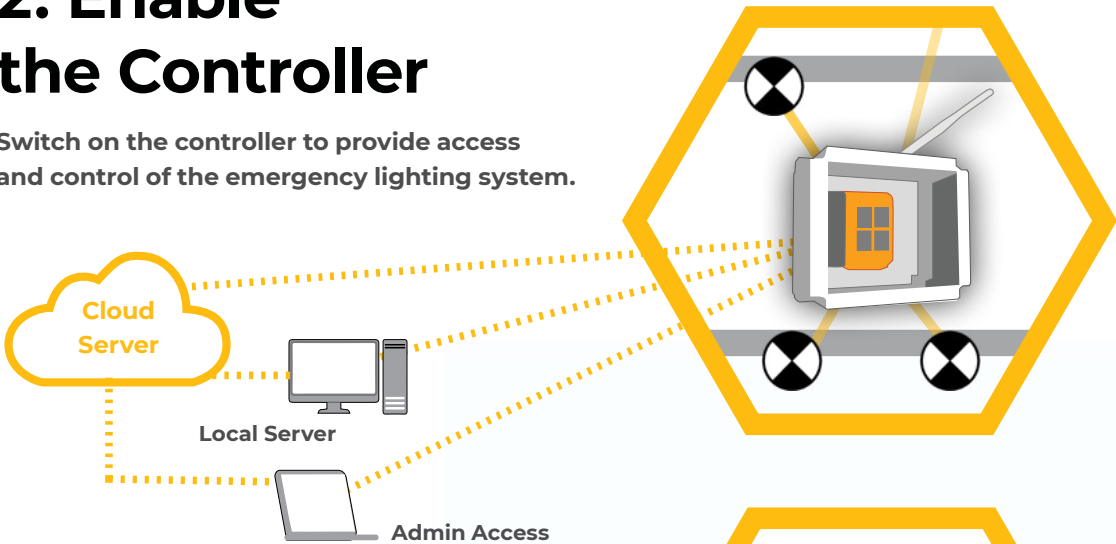


3. Create your Log Book

The fitting register can now be easily uploaded and a smartphone or tablet can be used to perform local fitting diagnostics and identification.

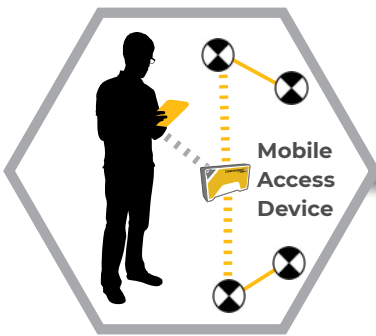

Local fitting diagnostics & identification

The MAD (Mobile Access Device) is a portable access tool (as small as a smartphone) that enables service technicians a mobile field connection to the XT HIVE network using a smart phone or tablet app.

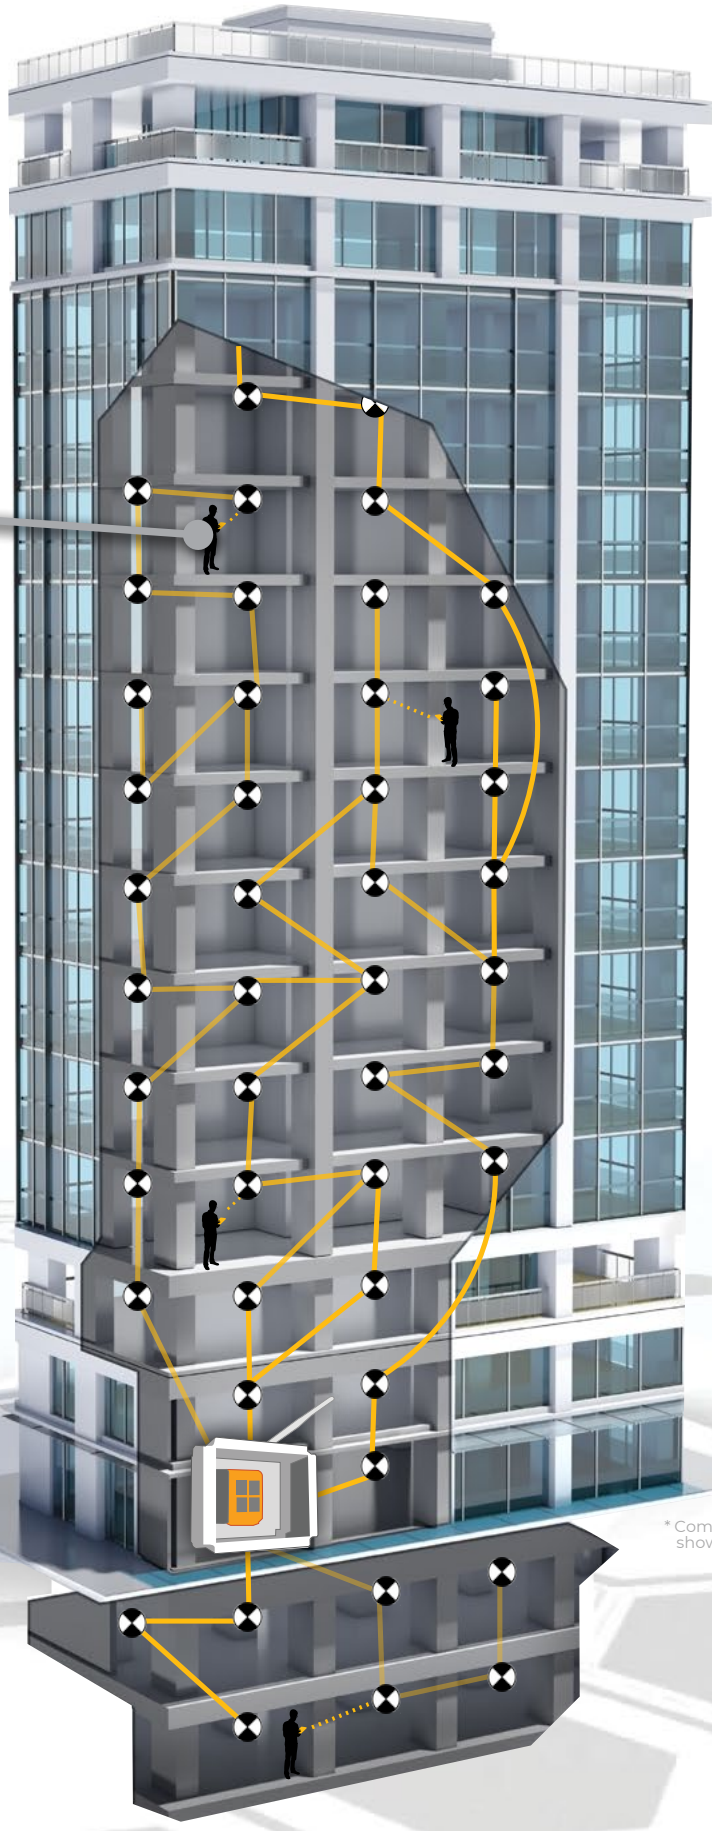

RF with Dynamic Self Managed Meshing

RF Mobile Access Device to Fittings

Bluetooth to Smart Device


* Components not shown to scale.

Security


The method used by the HIVE controllers to achieve this outcome is via a unique encryption key. Following the initial commissioning, the fittings are then issued an encryption key; either globally across the entire site or on a controller-by-controller basis.

In the same way that bees join a colony, once the encryption key is applied to the HIVE emergency fittings and the controller, a segregated community of Zoneworks XT HIVE emergency light fittings is established, and the members of this HIVE will only communicate with their fellow members, ignoring any others within range.

New members can only be added to this community by the issue of the site's unique encryption key. This key can be changed by the client if or as required.

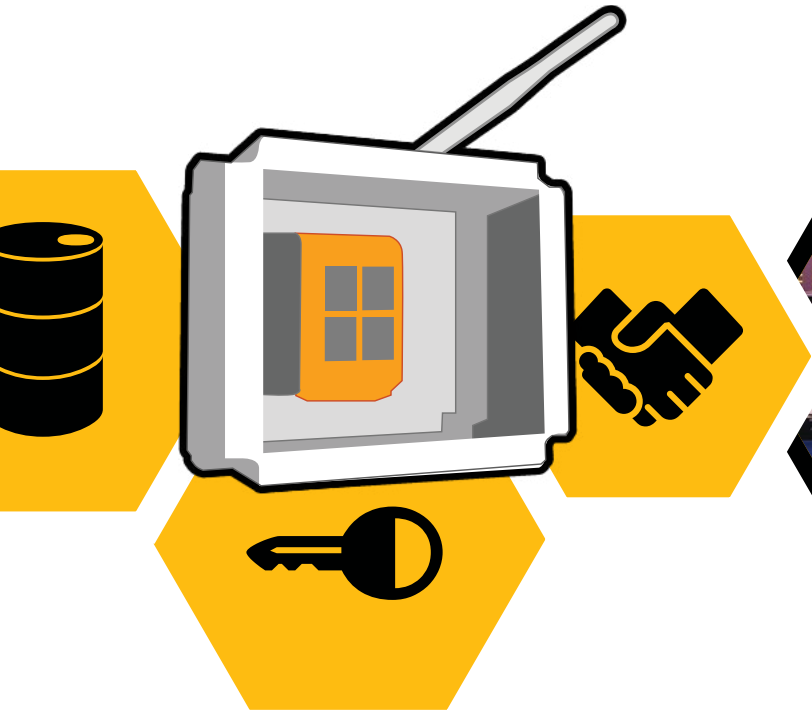

The HIVE controller(s) and fittings also provide 3 levels of RF network security – Message Integrity, Message Confidentiality (encryption) and Node Authenticity.



Message Integrity

Each message is appended with an OMAC1 Message Integrity Code.

Making sure the message content was not interfered with during transmission.



Message Confidentiality

Every message is encrypted with AES128 CTR mode using a message specific nonce.


Ensuring the message is encrypted in such a way that if it could be heard or intercepted the message could not be understood.



Node Authenticity

Network signalling messages are encrypted and appended with an OMAC1 Message Integrity Code (MIC). Nodes without the correct encryption & MIC key pair cannot join the network.

Making sure that received data can be trusted.



Security at the Controller and Server

Industry standard:

- SSH for file transfer
- HTTPS
- Secure Socket Layer for MQTT

Trusted across many industries

Government & Defence



Data Centres



Infrastructure & Transport



Operation & Reporting

Zoneworks XT HIVE has all the functionality users are familiar with, including a clean and simple web-based interface that can be integrated seamlessly with other networked building management services.



Fittings by groups



Fitting detail and test history

The reporting functionality provides everything you need at the push of a button from faulty fittings, maintenance log and full test results.

Flexible Site and User Management

Allows organisations with large sites or multiple locations to put one controller at each address to centrally manage all their emergency lighting systems from one place, including gathering compliance test results without needing to attend the sites in person.

A feature named “Site Group Access” enables facility managers to grant specific access to users across different parts of the network. For example, they might have an agreement with different local contractors to provide emergency lighting maintenance for different locations. The building manager can give them access to the system, but they’ll only see the parts that are relevant to their location. This feature coupled with Active Directory Integration allows system administrators to manage users more effectively.

Cloud Hosting

While the Zoneworks XT platform can be housed locally, clients may instead choose to access Zoneworks XT Cloud Hosting, making it the practical choice for installations where there are no dedicated building management facilities. All that is required is an internet connection to the local XT HIVE RF controller and you are set to go.

Simpler Commissioning

Multiple installers can work efficiently together at different locations to create the master register, ready for managing compliance testing for the site. The Zoneworks App lets maintenance personnel manage multiple sites, including control of access to the system for additions or changes as required.

Sensitive Areas that can’t utilise wireless platforms

Zoneworks XT HIVE has the solution if an RF network isn’t suitable for selected rooms or areas that are shielded from all RF interference due a specialist function, or a requirement for specific luminaires. These may include high-security facilities, emergency services control rooms, hazardous area lighting, or hospital MRI rooms. Adding a Hive2Wired bridge outside of the sensitive zone enables a Zoneworks connection using a (Non-RF) wired communication link into the shielded area and includes the fittings in the same system.

Building Management Systems Integration

The Zoneworks XT management software includes the capability to integrate with 3rd party Integrated Building Management Systems platforms. This allows for the integration of the emergency lighting information into a single, consolidated building management system, alongside other building services including general lighting, ventilation, security, access, and more.

- We offer integration with 3rd party Building Management Systems on several levels:
- a) **Low Level via voltage free contacts that provide system alarm and fault indications.**
 - b) **High Level via a Direct Structured Query Language (SQL) database access where all information associated with each emergency light fitting can be obtained (no additional cost).**
 - c) **High Level via REST API or MQTT interfaces that work with multiple supervisory systems, including Integrated Building Management Systems (IBMS).**

Clevertronics can provide a “System view” for the BMS integrator to access only the relevant information for each site.

Upgrading your existing Zoneworks system to XT HIVE


An investment in a Clevertronics Zoneworks system is an investment for life. Every new Zoneworks system is backwards compatible with previous generations that allows for a seamless upgrade pathway for all our end user clients to accommodate refurbishments like tenancy refits, building additions, or simply migration to our latest technology as fittings fail through natural attrition.

It is not a large investment to commence a system upgrade, simply add an XT HIVE controller and add or replace fittings when required under regular maintenance. Software updates are free and Clevertronics provides commissioning support to migrate your existing Zoneworks system and XT HIVE into one front end interface for ongoing testing, reporting & compliance management.

Backwards compatible HIVE nodes

Clevertronics LP & L10 battery technology combined with 100,000hour luminaires means your installed fittings have industry leading service life.

With our engineered backwards compatible HIVE nodes there is no need to discard functioning emergency lights to access the benefits of the Zoneworks XT HIVE as part of your upgrade project. The Zoneworks HUNI Card [HIVE Upgrade Node Interface] is a plug-and-play solution that links the existing evacuation luminaire into the HIVE platform. This process can happen in bulk or over time to build a complete HIVE system to maximise the life of your investment in lithium fittings.

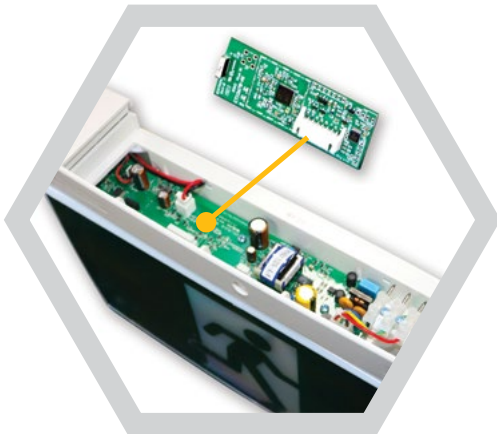

Seamless experience between new and existing Zoneworks systems

A single hybrid front-end Zoneworks interface allows existing clients to control both the existing and new generation of Zoneworks in one location, without jumping between interfaces or windows.

This creates a more seamless experience for clients with no separation between emergency lighting - allowing for staged upgrades or new XT HIVE additions on sites using our powerline platforms.

Upgrading your site to XT HIVE from scratch

Previous emergency lighting system upgrades were costly and complex due to the required backbone and cabling requirements. With Zoneworks XT HIVE's simple backbone and RF meshing system, all sites, regardless of manufacturer, can now be easily upgraded cost-effectively.

Here are some signs you might need to consider an upgrade:

- Your facilities management team are struggling to stay on top of testing and maintenance requirements
- Your team isn't sure how your system works because training and support is minimal
- You're not sure if your building is compliant, and there's no log of the testing or maintenance
- Your costs to manage, maintain, and test your system are high - and going up over time
- Your lamps and batteries are an older style that needs replacing every year or so

XT HIVE progressive upgrades don't add any significant upfront cost to your emergency lighting maintenance budget as it only requires the small investment of a HIVE controller. As the existing fittings fail and need replacement, XT HIVE compatible fittings are installed as a progressive upgrade throughout the site. This process ensures you are only using the maintenance budget to achieve the upgrade. Depending on the health of the existing fittings, you will likely have a fully operational HIVE site within a few years.

Only one XT HIVE fitting and controller is required to start you on a better emergency lighting compliance journey.

Are you interested in understanding more about an upgrade at your site?

Contact Clevertronics for a site audit, demonstration and cost analysis report.



Trusted across many industries

Residential & Hotels



Heavy Industry



Warehouse & Distribution



Technical Overview

Fittings per controller	Up to 1000
Fittings per system	Unlimited
High data throughput	Ultra fast data network enabling real-time analytics and response. Status and test result request times for a 1000 fitting network are an average of 1 second, or less per fitting
Network Commissioning	The RF network builds itself automatically (unattended) resulting in a dramatic reduction in site commissioning time - Clevertronics can deliver a fully commissioned network faster
Bluetooth Connectivity	Smart devices (IOS & Android) can connect locally via our mobile access device
Compatibility	Supports powerline and RF controllers
Antenna Configuration	Internal (external antennas by exception only on a limited range of products)
Product Availability	L10 & LP Exits, Emergency Lighting & Battens
Fittings Product Code	Add suffix '-HV' to existing L10 & LP Exits, Emergency Lighting or Battens
Security	XT HIVE fittings use high grade network security protocols to ensure that they only communicate within their site and will not interact with any device outside of the commissioned group
No Interference	The RF networks operates within the ACMA approved range of 915-928MHz which is outside of Wi-Fi, Mobile Phones, Bluetooth, and other wireless communication streams. XT HIVE is designed to operate in environments alongside other RF systems, even those using the same frequency band. It has proven performance in various environments including hospitals, retail, distribution centres, power stations, data centres, transport hubs and televised stadiums

Your Partner in Compliance

With the Zoneworks XT HIVE platform, Clevertronics also includes ongoing support through our complimentary Advantage Lifetime Support (ALS) program. This service is designed to help the building owner & maintenance contractor manage the on-going health for the life of the system.

Emergency lighting is regarded as a life-saving device, and therefore, it should always in working order. Compliance with the standard can be costly, especially if the products and operating systems regularly fail.

Many emergency lighting companies finish their involvement on your project once the product has been supplied. However, at Clevertronics we know that on-going support is important to contractors and building owners.



How can we help you?

System Health Check	Once you complete the testing, we assist with interpreting results
Optimisation	We can provide expert support to assist with optimising the system
Training	Periodic training is provided to ensure the user is confident with operating the system
Software	Complimentary software upgrades are installed to ensure your system is always up to date
Contact	You will always have a dedicated point of contact to answer your emergency lighting questions



Trusted across many industries

Retail & Commercial



Medical & Health



Education





DALI Registered

Clevertronics manufactures a range DALI registered emergency and exit luminaires.

DALI, the open protocol supported by all the major lighting manufacturers, enables digital dimming, individual luminaire control, lamp and ECG status feedback and emergency test and monitoring – all over a robust and simple wiring solution.



What is DALI

Digital Addressable Lighting Interface or more widely known as DALI is an open data and communication protocol that is defined under the IEC 62386 international standard. Part 202 of the standard specifies a protocol and test procedures for the control by digital signals of electronic control gear for use on a.c. or d.c. supplies, associated with self-contained emergency lighting. Clevertronics DALI luminaires are all fully compliant with IEC 62386-202 and are registered on the DIIA product database.

DALI Integration

By integrating emergency luminaires with the DALI lighting control system the same wiring and networking infrastructure can be utilised to monitor and test the emergency and exit luminaires. The DALI standard enables dimmable ballasts, emergency fittings and controllers from various manufacturers to be used in a single control system providing a flexible digital lighting system for designers, installers, facility managers and end-users. The DALI lighting control system and the software module for the emergency lighting is supplied by the lighting control system provider. Commissioning and addressing of the luminaires including the emergency lighting is also carried out by the lighting control system provider or systems integrator.

STANDARDS AND COMPLIANCE

The Clevertronics range of DALI Registered emergency and exit luminaires have been designed in accordance to: IEC 62386-202

Clevertronics and DALI

Each DALI emergency and exit luminaire incorporates a DALI plugin node module making the replacement of fittings simple without the need to re-address the new fitting. All Clevertronics DALI emergency and exit luminaires can be supplied with industry standard leads and connectors making installation to structured cabling quick and simple.

Clevertronics Support

Product and application support is always available for installers and integrators using Clevertronics DALI luminaires on a project. With dedicated project services and engineering teams based around Australia and New Zealand, we provide a high level of support for all projects and can provide technical advice, remote or on-site assistance at Clevertronics discretion.

DALI Product Range

Our extensive LP Premium and L10 Nanophosphate ranges are available with DALI.





“It has been a great learning curve for us, has improved safety and removed the compliance risks. In fact, it has set a new benchmark by going above and beyond the standard.”

identified Middle Park Coles as the perfect place to showcase the system because 80% of the emergency and exit

lighting fittings had already been replaced with Clevertronics LP, which all have self-testing as a standard feature,” explains Smith.

Bright says he is thrilled with the results. “We have programmed the system to self test every six months, as per our compliance obligations and, at that point, all the technician has to do is check each fitting to see if the LED is displaying a pass or fail indication. They capture the data electronically as they go using CleverSparky, then upload the data to the cloud for internal or, fully compliant, external auditing. It’s brilliant.”

There is no doubt the new CTP system will reduce labour costs, eliminate errors and give uniformity to the data collection process. In addition, Bright says it helps with forward maintenance. “If the fitting does display a failed test result, meaning there is an error, you can scan the fitting with your phone to automatically identify the issue, or just view the way the LED flashes to see what is required to fix it. We then electronically log the maintenance request,”

Smith is also happy with how the project has evolved. “It’s win-win-win. For CityFM, for Coles and for Clevertronics. It has been a great learning curve for us, has improved safety and removed the compliance risks. In fact, it has set a new benchmark by going above and beyond the standard,” he notes.

Having successfully demonstrated the concept store, the project is swiftly progressing towards the end goal, which is to have all single point Coles stores fully installed with CTP fittings and all data migrated onto CleverSparky.

“This will really drive efficiency gains giving us what I call ‘more for less,’” continues Bright. “It has been great to work with Clevertronics on the project. Our aim has always been to get the best product for the right price with the right support, and all of that combined equals Clevertronics.”

Solution

Product Support Manager for Clevertronics, Jason Meiklejohn, explains why this is far from the best approach. “We found huge variability in the way data was being recorded and managed. The whole regime made proving compliance quite difficult. In addition, the large population of legacy NiCad and fluorescent fittings installed in stores are reaching their end of life leading to high failure rates as well as high maintenance and energy costs.”

Bright agrees. “There is no doubt that the single point test and maintenance regime is a pretty clunky way of doing things. It’s not only time-consuming, and therefore costly, but must be done out of hours and, most seriously, is open to error and omissions. If it’s not 100% correct, this creates a huge compliance risk for the business if a fault should occur and data is found to be missing or wrong.”

With huge fines at stake, should an audit identify a problem, not to mention the safety risk to customers and staff, Bright engaged the team at Clevertronics to figure out a more time and cost-effective solution.

Results

The result is Clevertest Plus (CTP) System which has recently become operational in a concept Coles store called Middle Park in Queensland. Clevertronics National Accounts Manager, Graeme Smith, says it is incredibly gratifying to see the culmination of the four-year CTP product innovation journey finally come to life.

“Although we are scheduled to roll CTP out to all 600 of the older stores, Hector Bright was keen to get one store fully operational so we could easily demonstrate the benefits. We

Case Study – CTP System

Coles Group Melbourne VIC

Coles Group has broken new ground in emergency and exit lighting by achieving best in class compliance thanks to a hugely successful partnership between its facilities management company CityFM and emergency and exit lighting specialists Clevertronics. Clevertest Plus self-testing fittings, combined with the innovative CleverSparky app, means Coles customers and staff are 100% safe and CityFM can generate a compliance report at the push of a button.

As one of the world’s largest privately-owned facilities management companies, employing over 13,000 people with divisions across five continents, CityFM has an outstanding reputation for providing facilities management solutions to some of the world’s biggest companies. In Australia, CityFM’s expertise is proven by their longstanding contract with the Coles Group, Australia’s second largest retailer, who have placed all 800 of their supermarkets in the company’s care.

Challenges

One of the most important aspects of CityFM’s service offering is maintaining compliant emergency and exit lighting systems in accordance with the AS/NZS2293 emergency lighting standards. As defective emergency lighting is a serious public safety issue, when it came to deciding who to trust to help them uphold their legal obligations, it is not surprising that CityFM turned to Clevertronics. National Regional Technical Manager for CityFM, Hector Bright, explains why:

“We chose Clevertronics as our emergency and exit lighting partner because they were, and are, the most innovative company working in that space.”

“Right at the core of the success and longevity of the CityFM and Coles Group relationship is CityFM’s ability to innovate consistently across the full-service

offering. Within this, emergency and exit lighting is pivotal and it is my job to make sure the best and most reliable products are installed,” he says. “We chose Clevertronics as our emergency and exit lighting partner because they were, and are, the most innovative company working in that space.”

Clevertronics holds an estimated 50% market share in Australia and New Zealand across small, medium and large installations. Although all new Coles stores are automatically specified with Clevertronics Zoneworks (the gold standard emergency and exit lighting system), for existing stores a full retrofit is not always economically feasible.

“Doing a full retrofit with Zoneworks in our older stores was not possible, but we knew we had to do something to improve the emergency and exit lighting and maintenance approach. The manual method was no longer serving us. In fact, we increasingly recognised compliance risks associated with it,” continues Bright. The manual system that Bright is referring to is a single point test and maintenance regime that has been in place for many years. It involves a technician walking around the store every six months physically checking the fittings, making sure they stay illuminated for 90 minutes, recording the data in a paper logbook, then typing it into a spreadsheet.



Case Study – Zoneworks XT HIVE

Novotel Sydney Central

The Novotel Sydney Central is a contemporary 4.5 Star, 18 level Hotel located in Haymarket just 500 metres from the heart of Sydney's Darling Harbour. Built in 1988 and having gone through a refurbishment in 2008, the hotel comprises 255 guest rooms, restaurants and 10 function rooms.

Novotel Sydney Central is operated by Accor Hotels who owns, manages and franchises hotels, resorts and vacation properties across the globe. Accor operates in 100 countries, with more than 4,800 hotels and 280,000 employees worldwide.

"We had a limited budget so we couldn't do the whole building in one installation. With HIVE though we can begin with the infrastructure and a limited amount of fittings and then incrementally upgrade the building as fittings fail."

The emergency and exit lighting installed was manually tested, halogen and fluorescent fittings with NiCd batteries which had poor energy efficiency and were expensive to maintain and test. With the goal

of achieving a low cost of ownership and full site testing compliance, the Hotel Chief Engineer, Yi Ding was looking for a solution.

In August 2019, Clevertronics were invited to the AccorHotels NSW/ACT Engineering Managers meeting to present on all things emergency lighting, including latest innovations, technology and meeting statutory compliance requirements, it was during this presentation Yi Ding was introduced to the Clevertronics XT HIVE monitored system; and the solution to his site challenges became apparent.

Challenges

When asked about the challenges currently facing them with manually testing the emergency lighting in the building Yi Ding the Chief Engineer, Novotel Sydney Central said;

"Testing now is difficult and expensive, we have to test out of hours so the contractor needs to come in at 4:30 in the morning and switch the lights off (not all circuits have test switches due to the age of the building) we also have to pay extra staff to be here at that time". In addition, the existing baseline data that our compliance testing contractor has relating to circuit and switchboard details is incomplete and inadequate."

Coupled with this was the high failure rates of the existing fittings resulting in unacceptable ongoing maintenance cost.



Solution

A Clevertronics XT HIVE Monitored System – One single HIVE controller and base fittings were installed as part of an incremental upgrade of the site emergency & exit lighting.

When asked why upgrading to XT HIVE was the best option financially – Yi Ding commented

"We had a limited budget so we couldn't do the whole building in one installation. With HIVE though we can begin with the infrastructure and a limited amount of fittings and then incrementally upgrade the building as fittings fail. This feature was an essential feature and XT HIVE is the best value in achieving a bulletproof, low cost of ownership monitored system."

When asked why he agreed with Yi Ding's recommendation of the Clevertronics XT HIVE solution, the Installing contractor – Trent Cumines from Disc Electrical, a leading Sydney based electrical contracting business with extensive experience in hotels and commercial

markets upgrading emergency and exit lighting said:

"There are some challenges with the wiring onsite. We have worked with other RF and powerline monitored

systems before, due to the wiring/infrastructure on site, none of these were suitable. I did look at some other RF systems on the market however they were more expensive from an installation standpoint and due to the building layout were not suitable to get effective communication to all areas." "XT HIVE with its meshing was the only reliable solution"

Also from a support perspective, he wanted to use a brand that he could be confident had a proven reputation to support the system whole of life. XT HIVE backed by Clevertronics Advantage Lifetime Support (ALS) was the clear choice.

"We have worked with all manner of systems in the past, however the XT HIVE technology is backed by the best after sales support in the market which means we can execute the project with absolute certainty that our client will get the absolute best outcome."

We have 100 fittings installed onsite which with its meshing commissioned in less than it took to get a coffee and we can now perform emergency exit light testing and certification safely without affecting visitors, guests, staff and hotel operations. It has definitely streamlined




the entire process and we are looking forward to expanding the network to the remainder of the building."

The server and controller; have been located in the engineering office at the base of the building, there are several exit and emergency fittings nearby to establish the mesh network to the rest of the building.

Daniel Garden the assistant chief engineer on the site goes on to say "The BMS and the XT HIVE server are on a separate dedicated network allowing remote access" this will enable the Clevertronics ALS team to assist in supporting the site remotely as the staged upgrade continues towards a fully monitored building.

Results

In March 2020 the initial installation of the first stage of the upgrade including 100 fittings, controller and server was completed, on time and to budget with no disruption to hotel activities with the commissioning of the system concluded in a matter of minutes. The remaining older NiCad fittings will be replaced incrementally as they fail or as part of the planned site upgrade works. Due to each XT HIVE controller being able to manage 1000 fittings, no additional backbone hardware is required on site. The Clevertronics Advantage Plus program will now begin on this site, offering ongoing support for the life of the system.

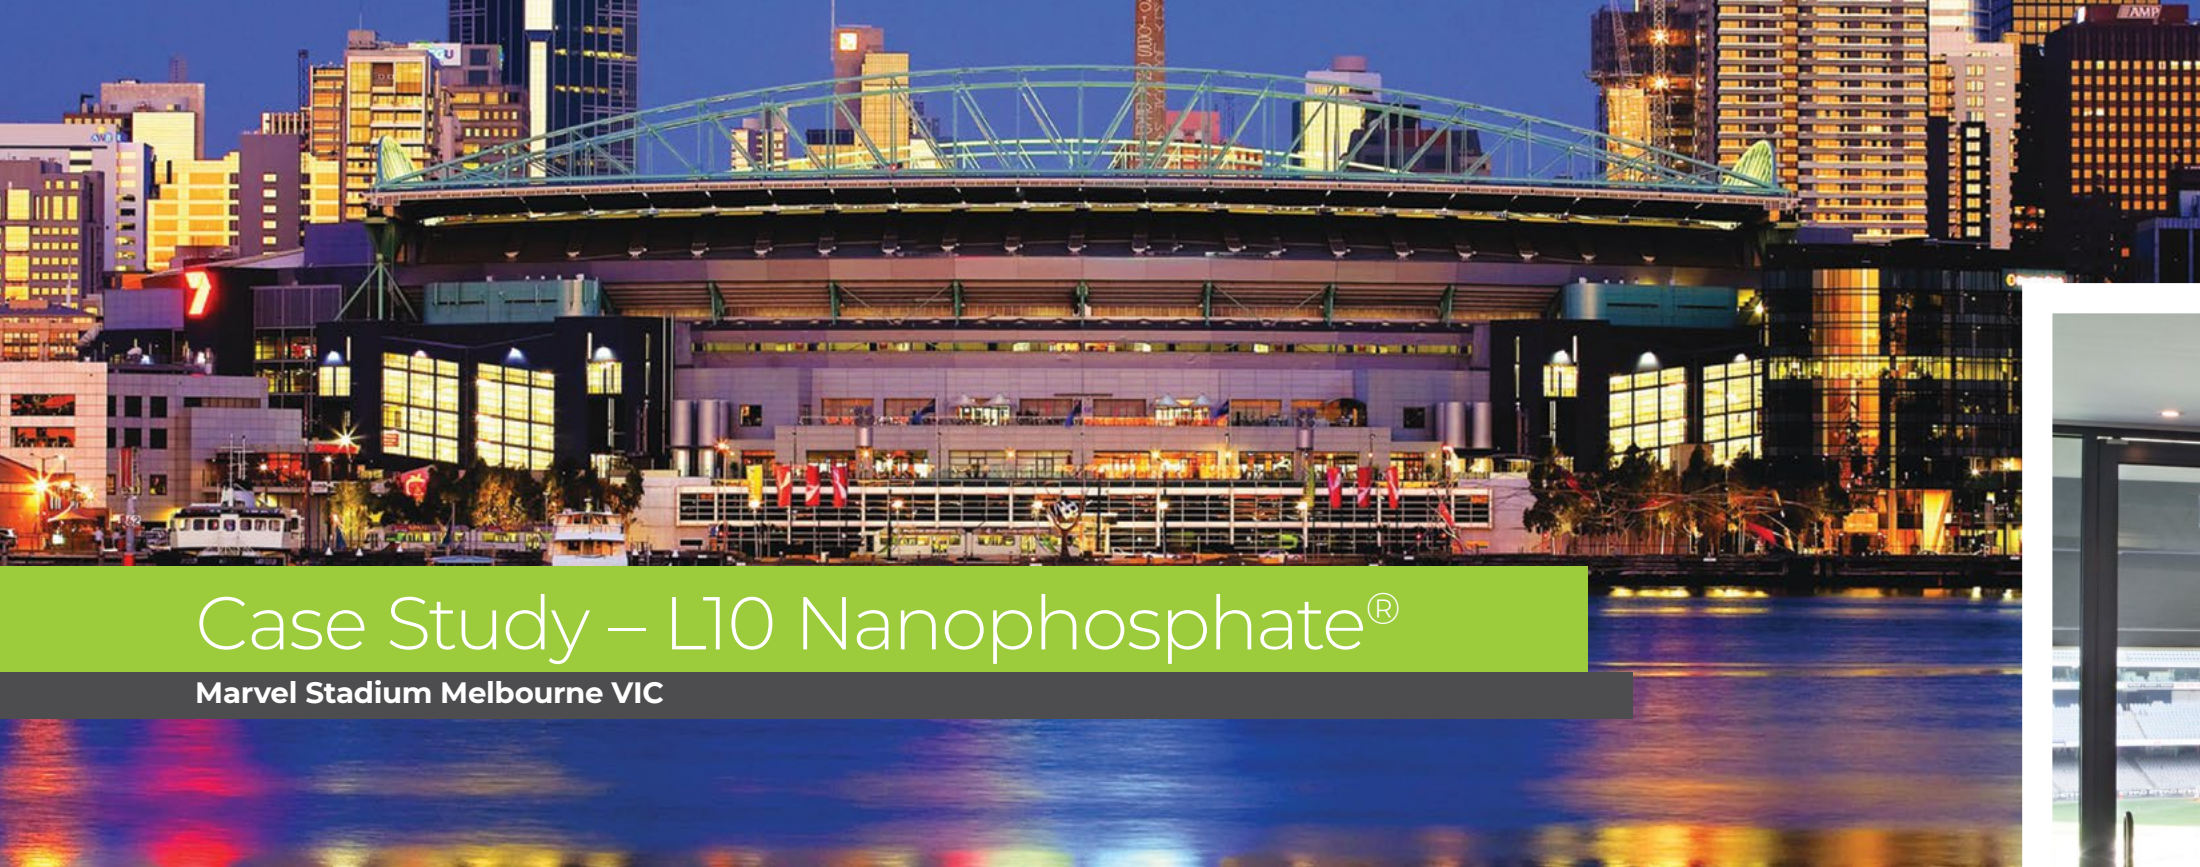

Case Study – L10 Nanophosphate®

Marvel Stadium Melbourne VIC

Marvel Stadium is a 52,000 seat multi-purpose facility designed to cater for major sporting and entertainment events, as well as social, business and private functions. The venue hosts as many as 80 arena sports and entertainment events and 600 non-event day functions annually in its 15 different function spaces.

In 2012, Honeywell was tasked with reviewing the Emergency and Exit Lighting within the stadium. With the existing system reaching the end of its serviceable life the maintenance costs which were already high had reached a level which was not sustainable at \$1,083,000 in costs over a 7 year period.

Marvel Stadium after 8 years



- 2,756 exit & emergency light fittings
- 93.51% Lithium battery capacity
- 33 total faults
- 1 battery fail



Challenges

With the stadium receiving such a high level of foot traffic, Emergency & Exit escape lighting is of utmost importance and the quality and performance of the emergency lighting is critical to ensure compliance is always achieved. Emergency and exit lighting also represented a major ongoing maintenance and energy cost for the stadium, and as time passed these costs grew exponentially as products had failed.

The biggest challenge was to firstly achieve 100% compliance and ensure safety for the customers and staff at the stadium and ensure the reliability could be improved and therefore reduce the overall maintenance costs over a 7 year period.

Solution

Following the consideration of various options, Honeywell was introduced to the Clevertronics L10 Nanophosphate® Lithium powered lighting range which had just been launched after 12 months of extensive testing. The Honeywell Victoria TAM Operations Manager who was managing the project said "The L10 Lithium range is the way of the future. I believe the move away from NiCd batteries will be quite swift as building owners and facility managers become aware of the numerous advantages that L10 product offers. The added advantage of low environmental impact and also less waste through longer replacement intervals also makes it a far more sustainable technology compared to existing practice. In September 2012, the installation of 2,756 Clevertronics L10 Nanophosphate® exit and emergency lighting fittings and a Zoneworks computer monitoring system began and was commissioned in early 2013. Honeywell estimated that switching from traditional Ni-Cd fittings to the Clevertronics L10 Nanophosphate® fittings would see its total energy and maintenance costs for emergency lighting reduced from \$1,083,830 to \$178,867 over a seven-year period, representing a saving of 83.5% which was beyond expectations before the project began.

Results

Recent results in August 2020 has shown that the average capacity of the L10 Nanophosphate fittings are at 93.51%, with an average run time of 178 minutes (90 minutes is the required time) after 8 years in service.

This indicates that the L10 batteries are on track to exceed the expected design life of the L10 product by a significant margin.

The site has now delivered the maintenance and energy savings estimated at the time of installation and continues to provide the site with the lowest cost emergency lighting solution on the market.





EXITS

EXITS

Cleverfit Exit	46	Weatherproof Universal Exit	60
Cleverfit Pro Exit	48	Weatherproof Wall Mount Exit	62
Ultrablade Pro Surface Mount Exit	50	Low Temperature Exit	64
Ultrablade Pro Recessed Exit	52	Low Temperature Jumbo Exit	66
Boxlite Exit	54	Vandal Resistant Exit	68
Jumbo Exit	56	24V Temporary Exit	168
Gigantor Exit	58		

CLEVERFIT EXIT



LED Exit Suitable for All Applications

The Cleverfit Exit is a proven market leader that is known for its reliability, energy efficiency and ease of installation. The tamper resistant cover makes it possible to include all diffuser combinations in one box for single or double sided applications.

The Cleverfit can be either wall or ceiling mounted and the quick connect bracket makes installation nice and easy.

Applications

-  Office Buildings
-  Schools
-  Factories
-  Retail Outlets
-  Car Parks
-  Theatres

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.1W to 2.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

 LED

 IP20

 24m

 Theatre

 LNP

 LFP

 Universal Mount

CLEVERFIT EXIT

ORDERING INFORMATION		EL	LP	L10
TEST OPTIONS PART#	Standard	ECFLED-LI	CCFLED	LCFLED
	Clevertest Plus System Compatible	No	Yes	Yes
	DALI	-	CCFLED-DALI	LCFLED-DALI
	Zoneworks® XT Hive	-	CCFLED-HV	LCFLED-HV
	Theatre Version	ECFLED-LI-TH	CCFLED-TH	LCFLED-TH
Carton Quantity		5 pieces		
Weight - single (carton)		1.2kg (6kg)	1.8kg (9kg)	
Dimensions (L x W x H)		355mm x 80mm x 215mm		
Directional Options		All Directional Inserts Included (Excluding theatre versions)		
Directional Options (Theatre Only)		Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CCFLED-TH-DS-R		

* for additional variants please refer to the Clevertronics Product Guide or website.

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby / Max)	1.1W / 2.0W	2.7W / 5.1W	2.7W / 4.5W
Lamp(s)	50,000 Hour LEDs	100,000 Hour LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 600mAh	3.2V / 1 500mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction- Body / Diffuser	ABS / PC
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20 (Weatherproof Version Available)

CLASSIFICATION	EL	LP	L10
C0	E2	E2.5	E2
C90	E2	E2	E2

SPARE PARTS	EL	LP	L10
Battery	1550195	1550190	1530090
Lamp Bar	8002900	8002120	8002430
DALI Node	-	8003060	8003060
Zoneworks®XT Hive Node	-	8003190	8003190
Diffuser	ECFD	ECFD	ECFD


ACCESSORIES	EL	LP	L10
Cantilever Bracket	CLVRBRT-CF-WP	CLVRBRT-CF-WP	CLVRBRT-CF-WP
Wireguard (Wall Mount)	2530050	2530050	2530050
Wireguard (Ceiling Mount)	2530110	2530110	2530110
Boxlite Cover Plate	3542250	3542250	3542250

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A
E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

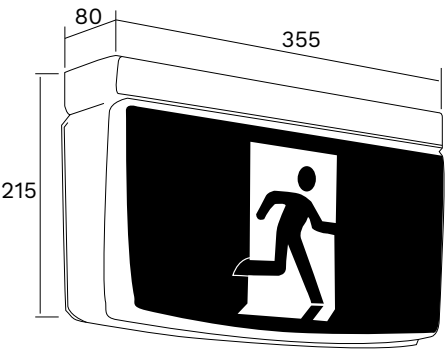

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

CLEVERFIT PRO EXIT



Modern and Slimline Architectural Exit

The Cleverfit PRO Exit offers a practical solution in a slimline, architecturally pleasing design. The tamper resistant cover makes it possible to include all diffuser combinations in one box for single or double sided applications.

With a slide connect steel bracket that can be both ceiling or wall mounted, it is easy to see why the Cleverfit PRO is a market leader.

Applications

- Office Buildings
- Shopping Centres
- Showrooms
- Retail Outlets
- Theatres
- Apartments



Features and Benefits

- AS/NZS 2293.3 compliant
- Low 2.8W standby power consumption
- Wall and ceiling mount with easy slide connect
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available



CLEVERFIT PRO EXIT

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART #	Standard	CCFPRO	LCFPRO
	Clevertest Plus System Compatible	Yes	Yes
	DALI	CCFPRO-DALI	LCFPRO-DALI
	Zoneworks® XT Hive	CCFPRO-HV	LCFPRO-HV
	Theatre Version	CCFPRO-TH	LCFPRO-TH
Carton Quantity		5	
Weight - single (carton)		2.5kg (15.0kg)	
Dimensions (L x W x H)		367mm x 72mm x 214mm	
Directional Options		All Directional Inserts Included (Excluding theatre versions)	
Directional Options (Theatre Only)		Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CCFPRO-TH-DS-R	

* for additional variants please refer to the Clevertronics Product Guide or website.

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		2.8W / 3.9W	
Lamp(s)		100,000 Hour LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 1100mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V(50Hz)
Construction - Body / Diffuser	PC-ABS / PC
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20

SPARE PARTS	LP	L10
Battery	1550105	1530030
Lamp Bar	8002710	8002710
DALI Node	8003060	8003060
Zoneworks® XT Hive Node	8003190	8003190
Diffuser	2360192	2360192

CLASSIFICATION	LP	L10
C0	D3.2	D3.2
C90	B16	B16


ACCESSORIES	LP	L10
Cantilever Bracket	CLVRBRT-CFPRO	CLVRBRT-CFPRO
Wireguard (Wall Mount)	2530050	2530050
Wireguard (Ceiling Mount)	2530110	2530110

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
B16	6.4	6.8	7.2	7.6	7.9	8.2	8.6	9.0	9.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

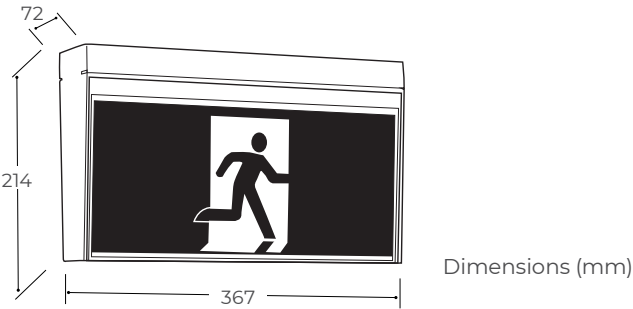

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ULTRABLADE PRO SURFACE MOUNT EXIT





Surface Mounted Architectural Blade Exit

The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium surface mounted exit.

With a reduced reflection, halo effect on the diffuser with a decal that is scratch and fingerprint resistant, it is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.



Applications

-  Office Buildings
-  Shopping Centres
-  Galleries
-  Retail Outlets
-  Theatres
-  Apartments

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.4W to 1.8W standby power consumption
- Wall and ceiling mount
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

 LED

 IP20

 24m

 Theatre

 LNP

 LFP

 Universal Mount

ULTRABLADE PRO SURFACE MOUNT EXIT

ORDERING INFORMATION		EL	LP	L10
TEST OPTIONS (PART#)	Standard	EUBPRO-SM-LI	CUBPRO-SM	LUBPRO-SM
	Clevertest Plus System Compatible	No	Yes	
	DALI	-	CUBPRO-SM-DALI	LUBPRO-SM-DALI
	Zoneworks® XT Hive	-	CUBPRO-SM-HV	LUBPRO-SM-HV
	Theatre Version	No	CUBPRO-SM-TH	LUBPRO-SM-TH
Carton Quantity		5		
Weight - single (carton)		1.0kg (5kg)		
Dimensions (L x W x H)		317mm x 8.7mm x 157mm - Blade Assembly 360mm x 47mm x 72mm - Base		
Directional Options		All Directional Inserts Included (Excluding theatre versions)		
Directional Options (Theatre Only)		-	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CUBPRO-SM-TH-DS-R	

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby / Max)	1.8W / 2.8W	1.4W / 3.7W	
Lamp(s)	50,000 Hour LED	100,000 Hour LED	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 1100mAh		3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body / Diffuser	PC-ABS / PC
Viewing Distance	24m
Mounting Type	Single and Double Sided
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS	EL	LP	L10
Battery	1560200	1550105	1530030
Lamp Bar	8002179	8002389	8002389
DALI Node	-	8003060	8003060
Zoneworks® XT Hive Node	-	8003190	8003190
Diffuser	2310250	2310250	2310250


CLASSIFICATION	EL	LP	L10
C0	E6.3	E6.3	E6.3
C90	E6.3	E6.3	E6.3

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E6.3	6.9	7.4	7.9	8.2	8.5	8.8	9.1	9.2	9.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

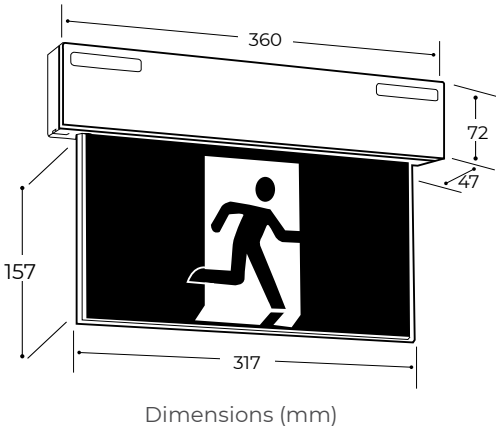

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ULTRABLADE PRO RECESSED EXIT



Recessed Architectural Blade Exit

The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium recessed exit.

With its low profile design, only 80mm of ceiling space is required during installation, combine this with a reduced reflection and halo effect on the diffuser and a decal that is scratch and fingerprint resistant. It is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.

Applications

- Office Buildings
- Shopping Centres
- Galleries
- Retail Outlets
- Theatres
- Apartments

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.4W to 1.8W standby power consumption
- Recessed mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

LED

IP20

24m

Theatre

LNP

LFP

Universal Mount

ULTRABLADE PRO RECESSED EXIT

ORDERING INFORMATION		EL	LP	L10
TEST OPTIONS (PART #)	Standard	EUBPRO-LI	CUBPRO	LUBPRO
	Clevertest Plus System Compatible	No	Yes	Yes
	DALI	-	CUBPRO-DALI	LUBPRO-DALI
	Zoneworks® XT Hive	-	CUBPRO-HV	LUBPRO-HV
	Theatre Version	No	CUBPRO-TH	LUBPRO-TH
Carton Quantity		5		
Weight - single (carton)		1.1kg (5.5kg)		
Dimensions (L x W x H)		317mm x 8.7mm x 157mm - Blade Assembly 385mm x 67mm - Cover Plate 350mm x 48mm - Ceiling Cutout		
Directional Options		All Directional Inserts Included (Excluding theatre versions)		
Directional Options (Theatre Only)		-	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CUBPRO-TH-DS-R	

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby / Max)	1.8W / 2.8W	1.4W / 3.7W	
Lamp(s)	50,000 Hour LED	100,000 Hour LED	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 1100mAh	3.2V / 1500mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body / Diffuser	PC-ABS / PC
Viewing Distance	24m
Mounting Type	Single and Double Sided
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS	EL	LP	L10
Battery	1560200	1550050	1530050
Lamp Bar	8002179	8002389	8002389
DALI Node	N/A	8003060	8003060
Zoneworks® XT Hive Node	N/A	8003190	8003190
Diffuser	2310250	2310250	2310250

ACCESSORIES	EL	LP	L10
Mounting Adaptor for Ultrablade	2740054	2740054	2740054


CLASSIFICATION	EL	LP	L10
C0	E5	E6.3	E6.3
C90	E5	E6.3	E6.3

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E5	6.6	7.0	7.4	7.7	7.9	8.1	8.2	8.2	8.0
E6.3	6.9	7.4	7.9	8.2	8.5	8.8	9.1	9.2	9.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

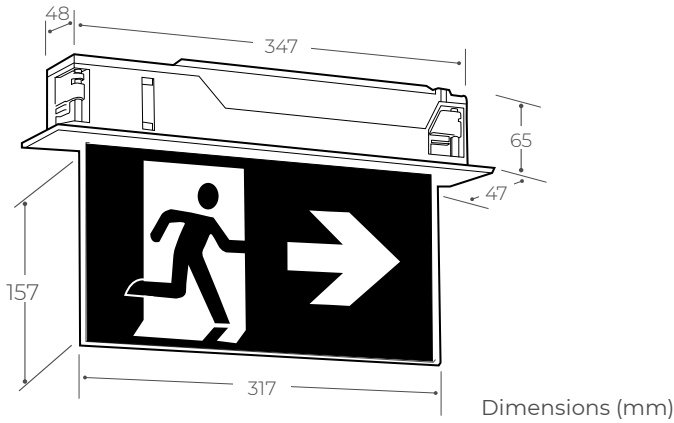

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

BOXLITE EXIT



Conventional Exit for Quick Retrofits

The Boxlite is a conventional style LED exit with a detachable base plate that makes retrofitting on existing sites easy work.

Available as a wall or ceiling mount and supplied with all diffuser combinations in each box.


Applications

- Office Buildings
- Schools
- Factories
- Retail Outlets
- Car Parks
- Apartments



Features and Benefits

- AS/NZS 2293.3 compliant
- Wall or ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate battery



BOXLITE EXIT

ORDERING INFORMATION	EL CEILING MOUNT 1	EL WALL MOUNT 2
	EBLLED-CM-LI	EBLLED-WM-LI
Standard	No	
Clevertest Plus System Compatible	5	
Carton Quantity	1.5kg (7.5kg)	
Weight - single (carton)	375mm x 160mm x 240mm	
Dimensions (L x W x H)	375mm X 105mm X 160mm	
Directional Options	All Directional Inserts Included	

POWER, LAMPS AND BATTERY	EL CEILING MOUNT 1	EL WALL MOUNT 2
	1.4W / 2.3W	50,000 Hours LED
Lamp(s)	Lithium Iron Phosphate	
Battery	3.2V / 1100mAh	
Voltage (V) / Capacity (mAh)	Intelligent Current Limited Constant Voltage	
Charging Method		

TECHNICAL SPECIFICATIONS		
Operating Mode	Maintained	
Voltage (V) Frequency (Hz)	220-240V (50Hz)	
Construction - Body / Diffuser	ABS / PC	
Viewing Distance	24m	
Mounting Type	Ceiling Single or Double Sided	Wall Single Sided
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP)	IP20	

SPARE PARTS	EL CEILING MOUNT 1	EL WALL MOUNT 2
	1560200	1560200
Battery	8002715	
Lamp Bar	EBLD-CM	
Diffuser	EBLD-WM	

ACCESSORIES	EL CEILING MOUNT 1	EL WALL MOUNT 2
	3562090	3562090
Cantilever Bracket (Ceiling)	2530050	
Wireguard (Wall Mount)	2530110	
Wireguard (Ceiling Mount)		

CLASSIFICATION	EL CEILING MOUNT 1	EL WALL MOUNT 2
	D3.2	E2
C0		
C90		

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	0.0
D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.
Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1.
Spacing classifications do not apply for theatre versions.

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 Ceiling Mount
- 2 Wall Mount

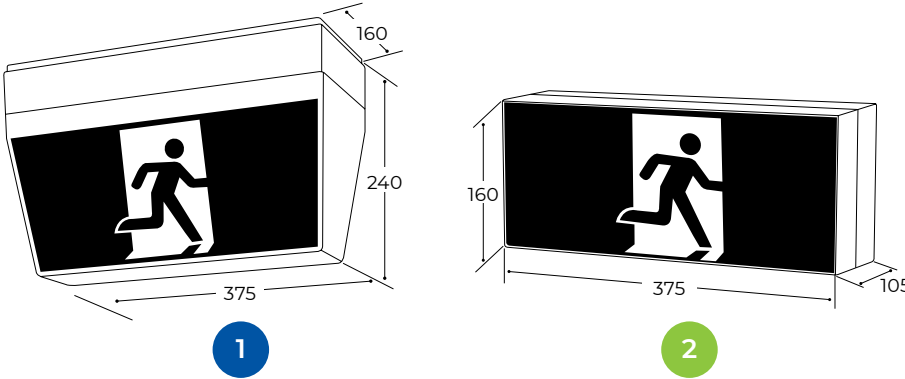

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

JUMBO LED EXIT



Jumbo Exit for Larger Viewing Distances

The Jumbo LED Exit caters for 40m viewing distance applications by using a 250mm high pictograph.

Featuring a robust steel housing with slide in diffusers and back plates for single and double sided configurations, the Jumbo LED Exit is easy to install as a wall or ceiling mounted exit.

Applications

- Warehouses
- Stadiums
- Factories
- Halls
- Car Parks
- Train Stations

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE



Features and Benefits

- AS/NZS 2293.3 compliant
- Wall and ceiling mount
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible

LED

IP20

40m

LNP

LFP

Universal Mount

JUMBO LED EXIT

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard	EJELED-40-LI	CJELED-40	LJELED-40
	Clevertest Plus System compatible	No	Yes	Yes
	DALI	-	CJELED-40-DALI	LJELED-40-DALI
	Zoneworks® XT Hive	-	CJELED-40-HV	LJELED-40-HV
Carton Quantity		1		
Weight - single (carton)		7.3kg		
Dimensions (L x W x H)		630mm x 100mm x 320mm		
Directional Options		All directional inserts included in the box		

POWER, LAMPS AND BATTERY		EL	LP	L10
Power Consumption (Standby / Max)		5.3W / 6.5W	3.2W / 5.6W	
Lamp(s)		50,000 Hour LED	100,000 Hour LED	
Battery type		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Construction - Body / Diffuser	Powder Coated Metal / Acrylic
Viewing Distance	40m
Mounting Type	Wall and Ceiling Single and Double Sided
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20 (IP66/67 Version Available)

SPARE PARTS	EL	LP	L10
Battery	1560156	1550010	1530010
Lamp Bar	8003055	8002470	8002470
DALI Node	N/A	8003060	8003060
Zoneworks® XT Hive Node	N/A	8003190	8003190
Diffuser	PJED-R-SLIDE	PJED-R-SLIDE	PJED-R-SLIDE


CLASSIFICATION	EL	LP	L10
C0	D6.3	D6.3	D6.3
C90	E3.2	E3.2	E3.2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D6.3	8.5	8.8	8.9	9.1	9.1	9.2	9.1	9.0	8.7
E3.2	5.8	6.1	6.4	6.5	6.6	6.6	6.4	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

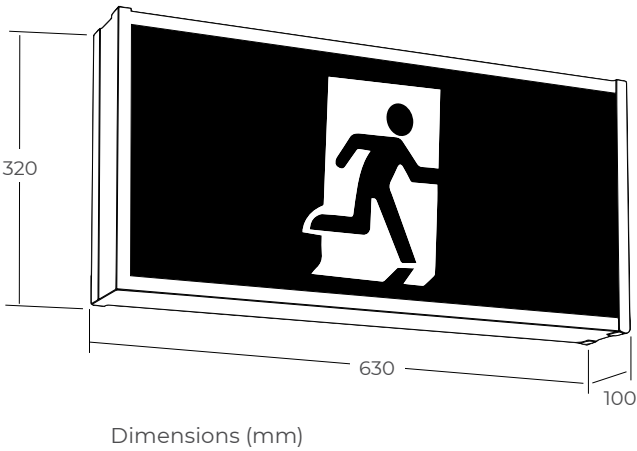

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

GIGANTOR EXIT



80m Viewing Distance Exit



The Gigantor Exit caters for applications requiring viewing distances of up to 80m.

With LED and Lithium battery technology the Gigantor is perfect for stadiums and large hall usage. Featuring a robust steel housing with a 510mm high pictograph that is designed to be wall mounted.

Applications

-  Factories
-  Stadiums
-  Warehouses
-  Halls



Features and Benefits

- AS/NZS 2293.3 compliant
- Wall mount
- Can be rod or chain suspended
- Lithium Iron Phosphate battery
- Clevertest Plus System compatible



GIGANTOR EXIT

ORDERING INFORMATION		LP
PART #	Standard	CGELED-80-WM-R
	Clevertest Plus System Compatible	Yes
	DALI	CGELED-80-WM-DALI-R
	Zoneworks® XT Hive	CGELED-80-WM-HV-R
Carton Quantity		1
Weight - single (carton)		21kg
Dimensions (L x W x H)		1305mm x 170mm x 560mm
Directional Options		Must Specify Diffuser Combination

POWER, LAMPS AND BATTERY		LP
Power Consumption (Standby / Max)		23W / 30W
Lamp(s)		100,000 Hours LED 2 x 3W LED
Battery type		Lithium Iron Phosphate
Voltage (V) / Capacity (mAh)		1 x 3.2V / 6400mAh 1 x 6.4V / 3200mAh
Charging Method		Intelligent Current Limited Constant Voltage

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body / Diffuser	Powder Coated Metal / Acrylic
Viewing Distance	80m
Mounting Type	Wall Single-Sided
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20

SPARE PARTS	LP
Battery	1550290 (6.4V) 1550230 (3.2V)
Lamp Bar	8002690
DALI Node	8003060
Zoneworks® XT Hive Node	8003190
Diffuser	2320010


CLASSIFICATION	LP
C0	D50
C90	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	-	-	-

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

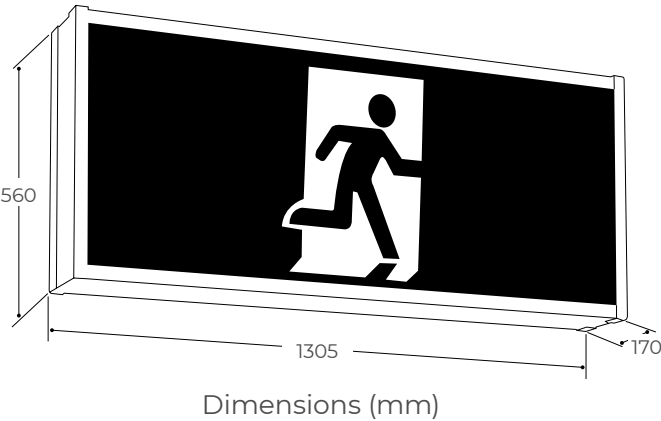

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

WEATHERPROOF UNIVERSAL EXIT



Weatherproof and Easy to Install



The Weatherproof Universal Exit offers a cost effective solution for applications that require an IP66/67 rated exit. Mounting can be either wall or ceiling with the option of single or double sided decals.

Built with a polycarbonate clear cover and nylon base that is tested to an impact rating of IK10 it is easy to see why it is a popular choice for weatherproof applications.

Applications

- Schools
- Public Amenities
- Factories
- Stadiums
- Car Parks
- Warehouses

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall or ceiling mount
- Can be rod or chain suspended
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Theatre version available

LED

IP66/67

24m

IK10

LNP

Theatre

LFP

Universal Mount

WEATHERPROOF UNIVERSAL EXIT

ORDERING INFORMATION		EL 1	LP 1	L10 1
PART NO.	Standard	EWELED-LI	CWELED	LWELED
	Clevertest / Self-Test Capable	No	Yes	Yes
	DALI	-	CWELED-DALI	LWELED-DALI
	Zoneworks® XT Hive	-	CWELED-HV	LWELED-HV
	Classic Version	-	-	LCWELED-R 2
Carton Quantity		4		
Weight - single (carton)		2.8kg (11.2kg)		
Dimensions (L x W x H)		410mm x 100mm x 272mm		
Directional Options		All Directional Inserts Included (Excluding theatre versions)		

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby/Max)	1.1W / 2.0W	2.7W / 5.1W	
Lamp(s)	50,000 Hours LEDs	100,000 Hours LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 600mAh	3.2V / 1500mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS		EL	LP	L10
Operating Mode	Maintained			
Voltage (V) Frequency (Hz)	220-240V(50Hz)			
Construction	Cleverfit Inside Glass Reinforced Nylon Base and PC Cover			
Viewing Distance	24m			
Mounting Type	Wall and Ceiling (Single and Double Sided)			
Operating Temperature	0°C to 40°C			
Ingress Protection Rating (IP)	IP66/67			
Impact Rating (IK)	IK10			
SPARE PARTS		EL	LP	L10
Battery		1550195	1550190	1530090
Lamp Bar		8002900	8002120	8002430
DALI Node		-	8003060	8003060
Zoneworks® XT Hive Node		-	8003190	8003190
Weatherproof Enclosure		2710140	2710140	2710140
ACCESSORIES		EL	LP	L10
Cantilever Bracket		CLVBRT-CF-WP	CLVBRT-CF-WP	CLVBRT-CF-WP
CLASSIFICATION		EL	LP	L10
C0		E2	E2	E2
C90		E1.6	E2	E2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:


- 1 Standard Version
- 2 Classic Version

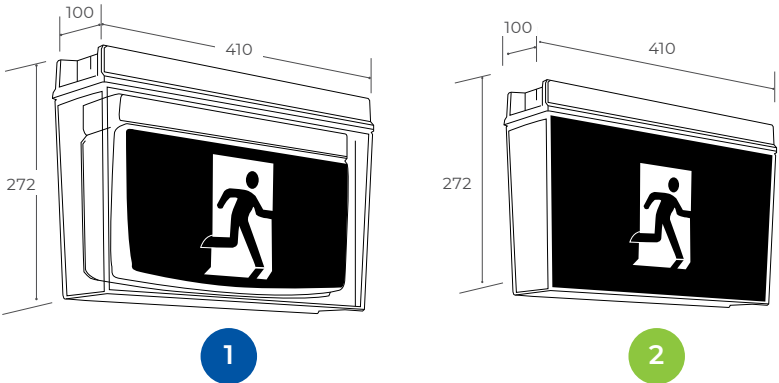

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

WEATHERPROOF WALL MOUNT EXIT

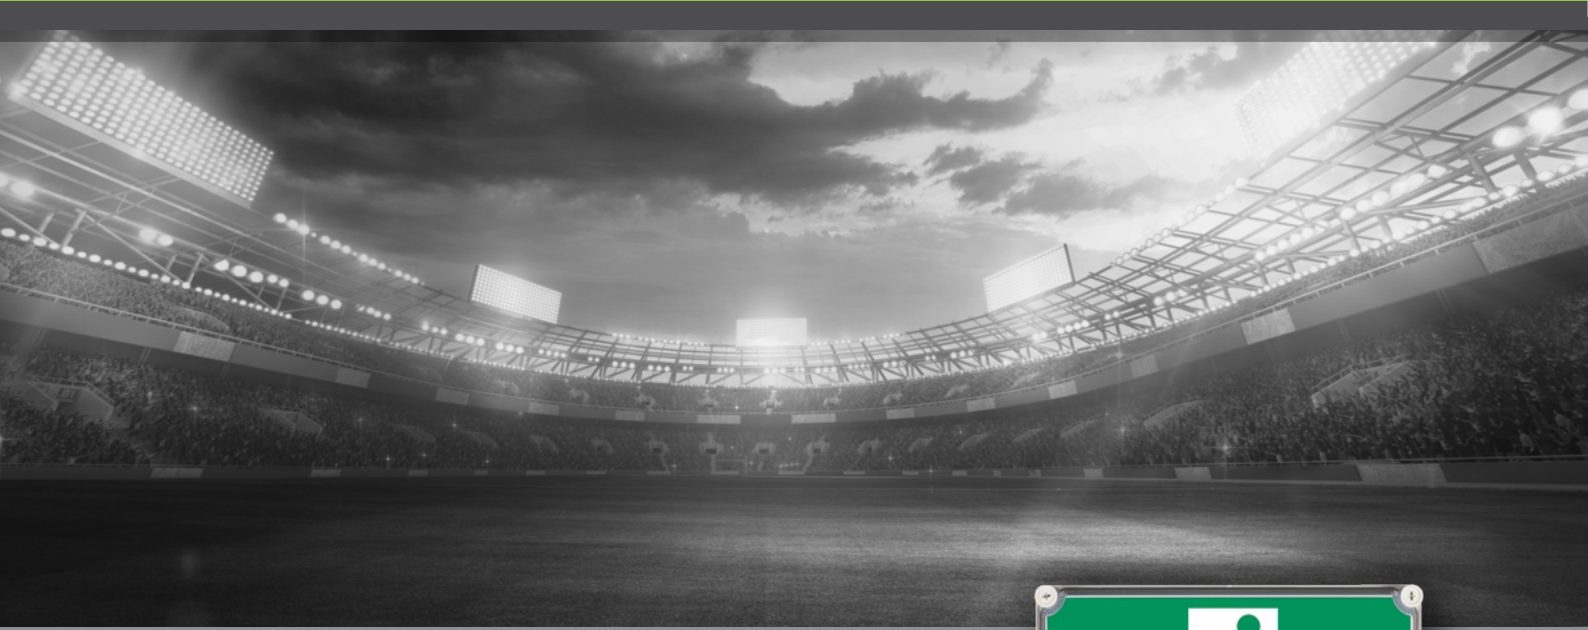

Weatherproof with a Variety of Viewing Distances

The Weatherproof Wall Mount exit is ideal for applications that require an IP66/67 rated exit that is available in 24m and 40m viewing distances.

Fitted with 100K hour LEDs and built with a robust polycarbonate base and diffuser it is perfect for applications in warehouses, factories and stadiums.



Applications

- Schools
- Factories
- Car Parks
- Public Amenities
- Stadiums
- Warehouses

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall mount
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- Various viewing distances (24m & 40m)

LED

LNP

24m

LFP

40m

IP66/67

Wall Mount

IK08/09

WEATHERPROOF WALL MOUNT EXIT

ORDERING INFORMATION		LP		L10	
TEST OPTIONS PART #	Viewing Distance	24M 1	40M 2	24M 1	40M 2
	Standard	CWELED-WM	CJWELED-40-WM-R	LWELED-WM	LJWELED-40-WM-R
	Clevertest Plus System/ Self-Test Capable	Yes			
	DALI	CWELED-DALI-WM	CJWELED-DALI-40-WM-R	LWELED-DALI-WM	LJWELED-DALI-40-WM-R
	Zoneworks® XT Hive	CWELED-HV-WM	CJWELED-40-HV-WM-R	LWELED-HV-WM	LJWELED-40-HV-WM-R
Carton Quantity		1			
Weight - single (carton)		2.8kg	5.4kg	2.8kg	5.4kg
Dimensions (L x W x H)		380mm x 130mm x 190mm	560mm x 130mm x 280mm	380mm x 130mm x 190mm	560mm x 130mm x 280mm
Directional Options		Diffuser Options for 40m Only - add, R Right, L Left eg CJWELED-40-WM-R for Running Man, Arrow Right.			

POWER, LAMPS AND BATTERY	24M 1	40M 2	24M 1	40M 2
Power Consumption (Standby / Max)	2.7W / 5.1W	3.0W / 5.0W	2.5W / 4.8W	2.8W / 5.3W
Lamp(s)	100,000hrs LEDs			
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®	
Voltage (V) / Capacity (mAh)	3.2V / 1500mAh		3.3V / 2500mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage			

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	240V AC / 50Hz
Construction - Body / Diffuser	PC / PC
Mounting Type	Wall mount Single Sided
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP66/67
Impact Rating (IK)	IK08 (Side) & IK09 (Front)

SPARE PARTS	24M 1	40M 2	24M 1	40M 2
Battery	1550190	1550010	1530010	1530010
Lamp Bar	8002120	8002122	8002430	8002122
DALI Node	8003060	8003060	8003060	8003060
Zoneworks® XT Hive Node	8003190	8003190	8003190	8003190

CLASSIFICATION	24M 1	40M 2	24M 1	40M 2
C0	E1.25	E1.6	E1.25	E1.6
C90	E1	E1.25	E1	E1.25

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1	3.7	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A
E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 24m Exit Sign
- 2 40m Exit Sign

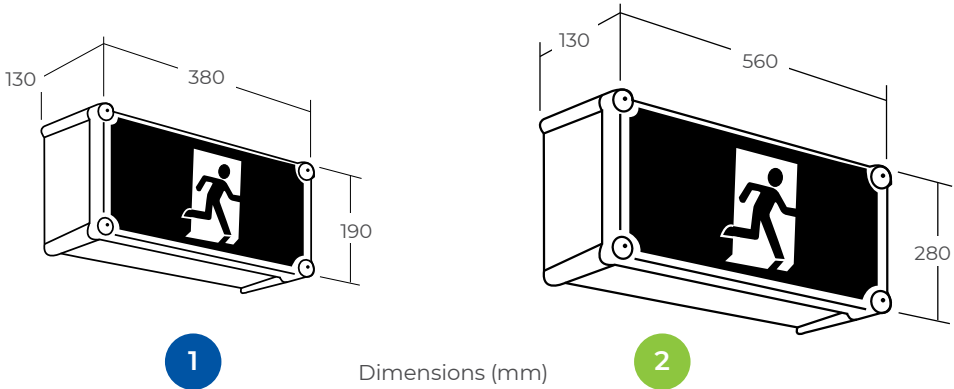

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LOW TEMPERATURE EXIT

Suitable for Cool Room and Freezer Applications

The Low Temperature Exit range is designed for cool room and freezer applications where the temperature can drop to -40°C.

Now featuring Lithium Nanophosphate battery technology, the 24m viewing distance range is available in universal or wall mount as a one box solution with all directional decals to suit any application.

Applications

-  Cool Rooms
-  Food Processing
-  Freezers
-  Alpine Regions



Features and Benefits

- AS/NZS 2293.3 compliant
- 25°C to -40°C options
- Lithium Nanophosphate® battery
- IP66/67 rating for weatherproof applications
- Clevertest Plus System compatible

 LED

 IK10

 24m

 IK08/09

 LNP

 IP66/67

 Wall Mount

 -25°/-40°

 Universal Mount

LOW TEMPERATURE EXIT

ORDERING INFORMATION		L10		
Viewing Distance/Product configuration		24m Universal Mount Single or Double Sided Integral Gear 1	24m Wall Mount Single Sided Integral Gear 2	24m Wall Mount Single Sided Remote Enclosed Gear 2 3
Operating Temperature		-25°C TO 40°C		-40°C TO 40°C (EXIT) 0°C TO +40°C (REMOTE CONTROL GEAR)
PN	Standard	LWEPRO-FZR	LWELED-WM-FZR	LWELED-WM-IPREM
	Zoneworks® XT Hive	LWEPRO-FZR-HV	LWELED-WM-FZR-HV	LWELED-WM-HV-IPREM
Clevertest Plus System Compatible		No	No	Yes
Directional Options		All directional inserts included (excluding theatre versions)		
Carton Quantity		1		
Weight - single (carton)		3.4kg	2.7kg	4.8kg
Dimensions (L X W X H) - Exit		410mm x 100mm x 272mm	380mm x 190mm x 130mm	380mm x 190mm x 130mm
Dimensions (L X W X H) - Remote Enclosed Gear		-	-	380mm x 190mm x 130mm

POWER, LAMPS AND BATTERY		L10		
Power Consumption (Standby / Max)		1.4W / 3.5W	2.8W / 3.8W	3.6W / 4.6W
Lamp(s)		100,000 Hours LED		
Battery		Lithium Nanophosphate®		
Voltage (V) / Capacity (mAh)		3.3V / 5000mAh		3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS		L10		
Operating Mode		Maintained		
Voltage (V) (Frequency (Hz))		240V AC (50HZ)		
Construction - Body / Diffuser		Exit: PC/ABS Body with PC Diffuser / Enclosure PC Clear Cover, Glass Reinforced Nylon Base	PC Clear Cover, PC Base	PC Clear Cover, PC Base
Ingress Protection Rating (IP)		IP66/67		
Impact Rating (IK)		IK10	IK08 (Side Surface) / IK09 (Front Surface)	

SPARE PARTS		L10		
Battery		1530030	1530230	1530010
Lamp Bar		8002710	8002120	8002120

CLASSIFICATION		L10		
C0		D2.5	E1.6	E1.6
C90		E4	E1.6	E1.6


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
D2.5	5.8	5.8	5.7	5.6	5.3	0.0	0.0	0.0	N/A
E4	6.2	6.6	6.9	7.1	7.3	7.4	7.4	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1.
Spacing classifications do not apply for theatre versions.
*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 L10 Universal Mount
- 2 L10 Wall Mount Integral Gear
- 3 L10 Wall Mount Remote Control

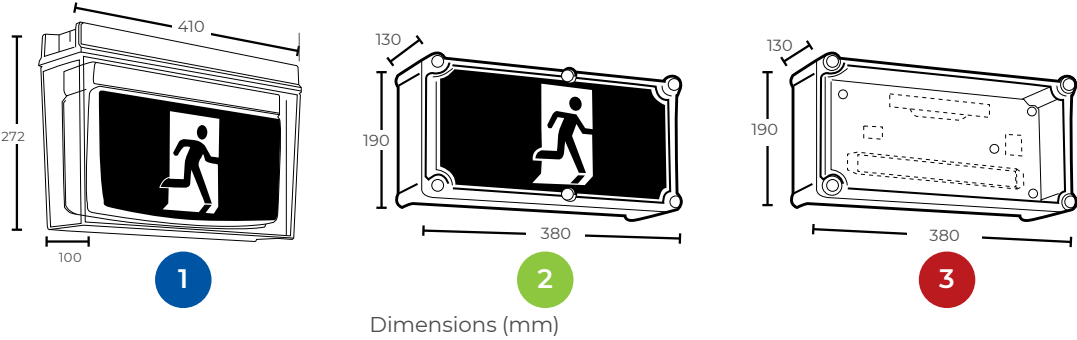

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LOW TEMPERATURE JUMBO LED EXIT




Low Temp Jumbo Exit for Larger Viewing Distances

The Low Temperature Exit range is designed for cool room and freezer applications where the temperature can drop to -40°C.

Now featuring Lithium Nanophosphate® battery technology, the 40m viewing distance range is available with integral or remote control gear to suit any application.

Applications

- Cool Rooms
- Food Processing
- Freezers
- Alpine Regions



Features and Benefits

- AS/NZS 2293.3 compliant
- -25°C to -40°C options
- Lithium Nanophosphate® battery
- IP66/67 rated for weatherproof applications
- Clevertest Plus System compatible

LED

IP66/67

40m

LNP

Wall Mount

-25°/-40°

LOW TEMPERATURE JUMBO LED EXIT

ORDERING INFORMATION			L10
Viewing Distance / Product Configuration		40M Integral Gear 1	40M Remote Control Gear 1 2
Operating Temperature		-25°C to 40°C	-40°C to 40°C (Exit) 0°C to +40°C (Remote Control Gear)
PART NO.	Standard	LJWELED-WM-FZR-40-R	LJWELED-WM-40-IPREM-R
	Clevertest Plus System compatible	No	Yes
	Zoneworks® XT Hive	LJWELED-WM-FZR-40-HV-R	LJWELED-WM-40-HV-IPREM-R
Carton Quantity		1	
Weight - single (carton)		5.5kg	7.7kg
Dimensions (L X W X H) - Exit		560mm x 280mm x 130mm	560mm x 280mm x 130mm
Dimensions (L X W X H) - Control Gear		-	380mm x 190mm x 130mm
Directional Options		Diffuser Options - add 'R' Right Arrow, 'L' Left Arrow (eg LJWELED-WM-FZR-40-RR)	

POWER, LAMPS AND BATTERY		L10
Power Consumption (Standby / Max)		2.8W / 5.3W
Lamp(s)		100,000 Hours LED
Battery type		Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.3V / 5000mAh 3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage

TECHNICAL SPECIFICATIONS	L10
Operating Mode	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Construction - Body / Diffuser	Polycarbonate Clear Cover, Polycarbonate Base
Mounting Type	Wall Mount
Ingress Protection Rating (IP)	IP66/67 (Both Exit & Remote Control Gear)
Impact Rating (IK)	IK08 (Side Surface), IK09 (Front Surface)

SPARE PARTS	L10	
Battery	1530230	1530010
Lamp Bar	8002122	8002122

CLASSIFICATION	L10	
C0	E1.6	E1.6
C90	E1.25	E1.25

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux.
Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 40M Integral Gear
- 1 2 40M Remote Control Gear

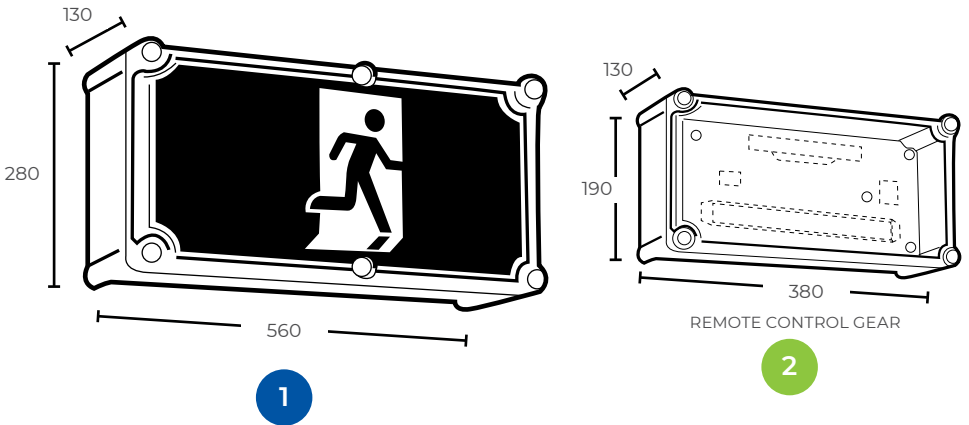

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

VANDAL RESISTANT EXIT



A Strong, Robust and Reliable Exit

The Vandal Resistant Exit is a high impact IK12 rated exit that utilises the Cleverfit PRO within a powder coated steel enclosure.

It provides an effective solution for prisons, correction facilities, train stations and heavy industrial areas. It can be wall, ceiling or flag mounted with single or double-sided decals.



Applications

- Public Amenities
- Schools
- Stadiums
- Train Stations
- Car Parks
- Correctional Facilities



Features and Benefits

- AS/NZS 2293.3 compliant
- Wall, ceiling and flag mount options
- All directional decals in one box
- Lithium Nanophosphate® battery
- Clevertest Plus System compatible
- All test options available



VANDAL RESISTANT EXIT

		L10		
PART NO.	ORDERING INFORMATION	CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED
	Standard	LVELED-CM	LVELED-WM	LVELED-FM
	Clevertest Plus System Compatible	Yes		
	DALI	LVELED-CM-DALI	LVELED-WM-DALI	LVELED-FM-DALI
	Zoneworks® XT Hive	LVELED-CM-HV	LVELED-WM-HV	LVELED-FM-HV
Carton Quantity		1		
Weight - single (carton)		6.6kg		
Dimensions (L x W x H)		425mm x 100mm x 270mm		
Directional Options		All Directional Inserts Included		

		L10
POWER, LAMPS AND BATTERY		
Power Consumption (Standby / Max)		3.6W / 5.6W
Lamp(s)		100,000 hours
Battery		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage

TECHNICAL SPECIFICATIONS	L10
Operating Mode	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Construction	Cleverfit PRO Inside Powder Coated Metal Frame and PC Diffuser
Viewing Distance	24m
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20
Impact Rating (IK)	IK12

SPARE PARTS	L10		
	CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED
Battery	1530030	1530030	1530030
Lamp Bar	8002250	8002250	8002250
DALI Node	8003060	8003060	8003060
Zoneworks® XT Hive Node	8003190	8003190	8003190
Diffuser	2360300	2360300	2360300


CLASSIFICATION	L10		
	CEILING MOUNTED	WALL MOUNTED	FLAG MOUNTED
C0	D3.2	D3.2	D3.2
C90	E8	E8	E8

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
E8	7.3	7.9	8.4	8.8	9.2	9.5	9.9	10.2	10.4

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>


Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

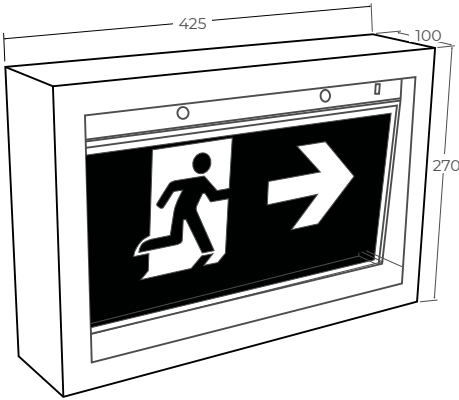

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

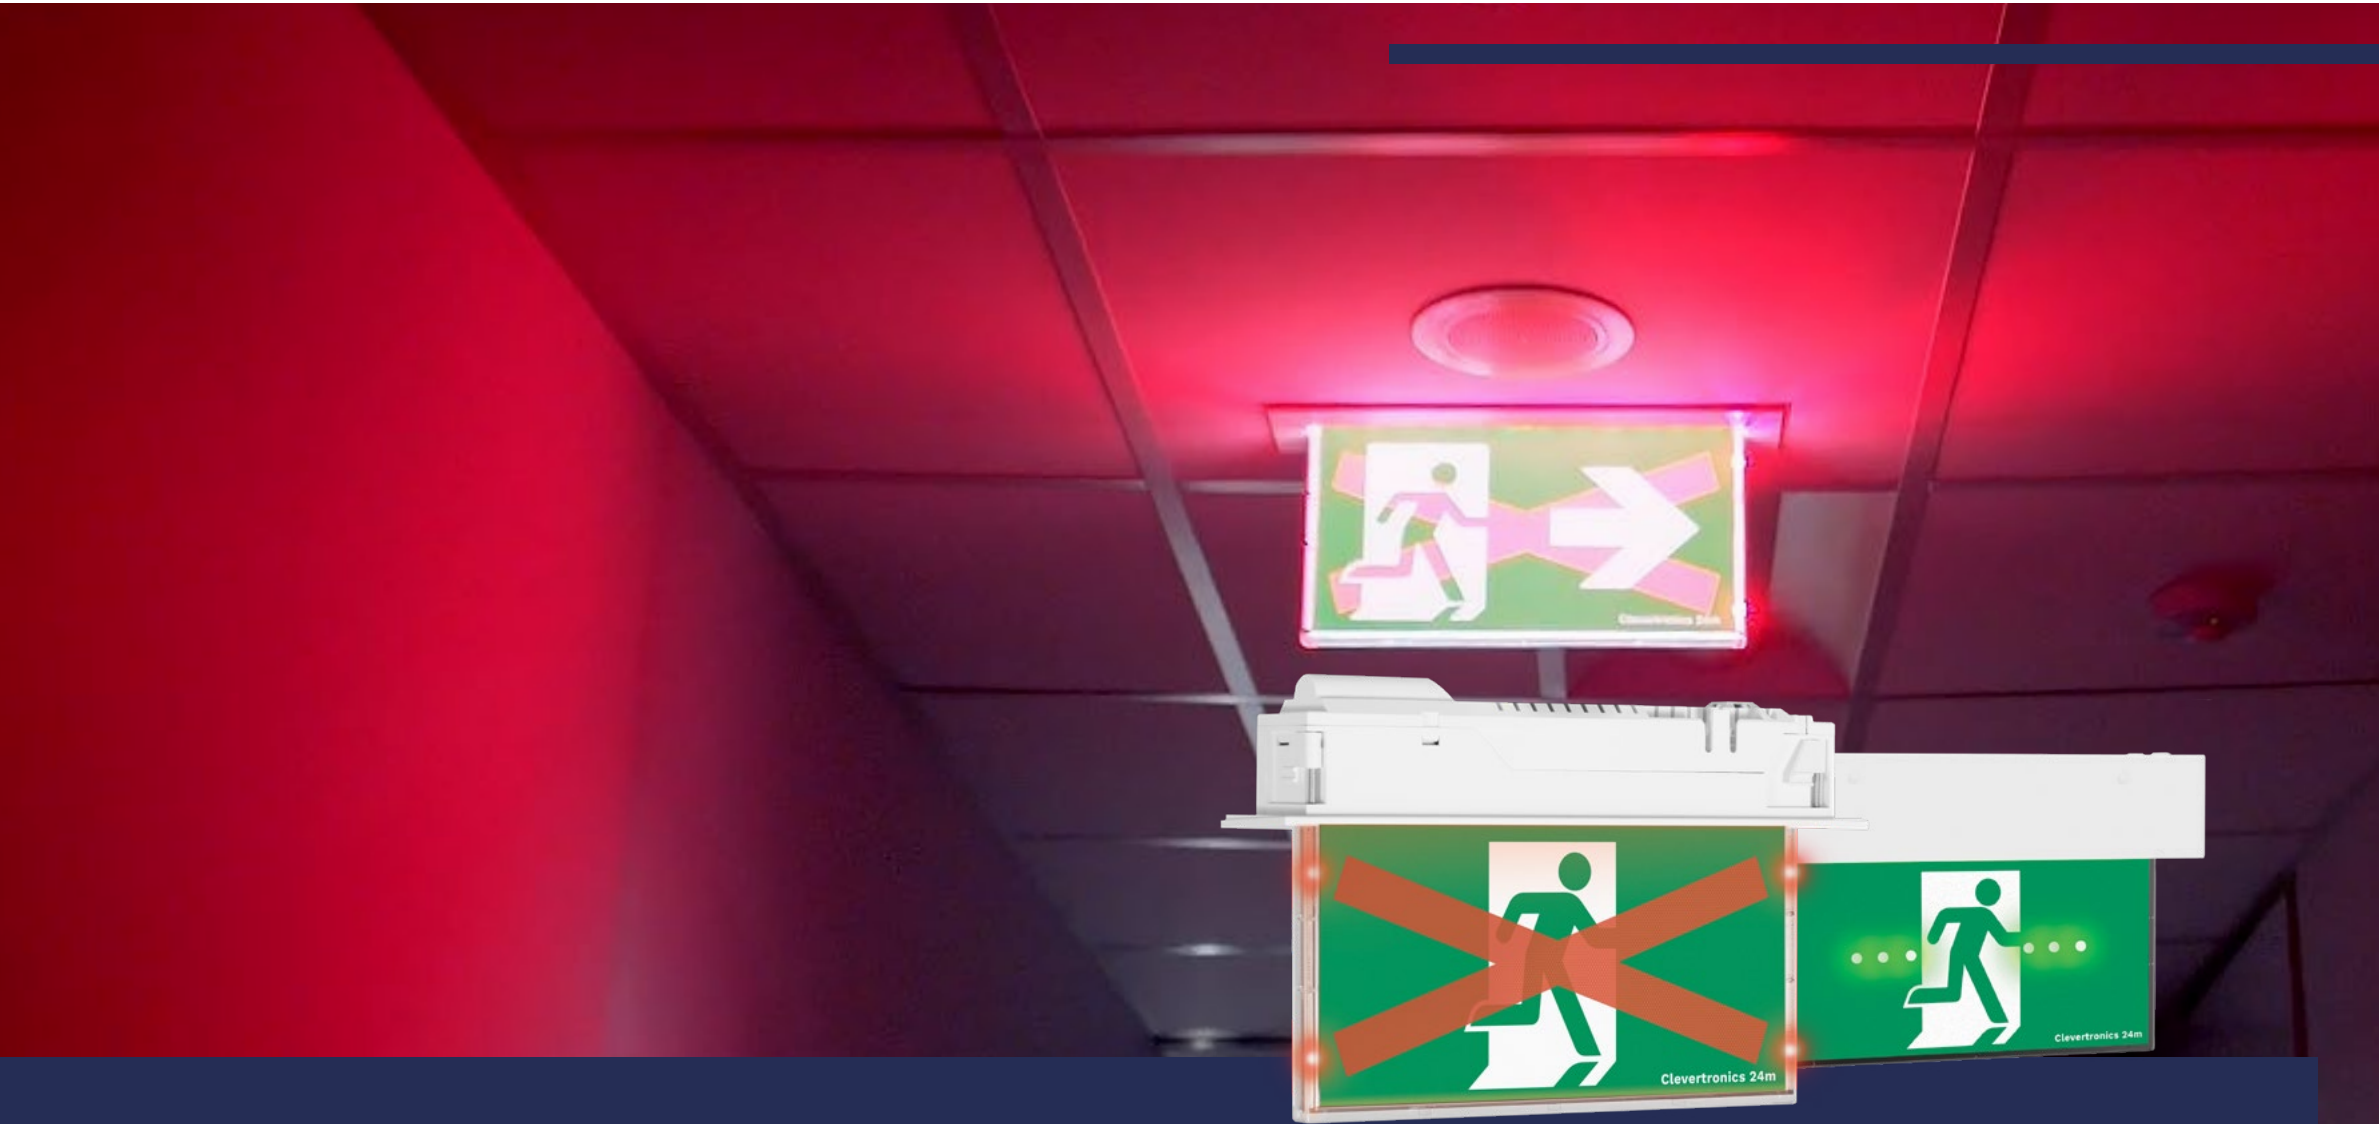

DYNAMIC EXIT SIGNAGE

DYNAMIC EXIT SIGNAGE

CleverEVAC Dynamic Green Exit	72
CleverEVAC Dynamic Red X Exit	74
CleverEVAC Dynamic Green Blade Exit	76
CleverEVAC Dynamic Red X Blade Exit	78

Disclaimer: Clevertronics Pty Ltd is a vendor of CleverEVAC products. It is not a fire engineer or designer. It does not purport to recommend its products for use in any particular application or to achieve any particular outcome. Purchasers and users of its products must take their own steps to ensure compliance with statutory requirements, safe practice and suitable application of the products.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

CLEVEREVAC DYNAMIC GREEN EXIT



Dynamic GREEN Exit Sign

The CleverEVAC Dynamic GREEN exit sign has been developed to provide an increased visibility of exit signage.

Dynamic GREEN exit signs are available with the standard running man symbol and also with directional arrow options. The Dynamic GREEN mode is triggered either by a 24VDC or voltage free open/close signal from the fire detection or other building safety system.

Combining audible locatable sounds including announcements such as 'Exit Here', with the increased visibility of dynamic exit signage, the SoundEscape™ option is available and fits perfectly into all dynamic exit sign products.

Suitable for Most Applications

- Office Buildings
- Shopping Centres
- Stadiums
- Theatres
- Car Parks
- Airports
- Schools
- Transit Centres

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE



SoundEscape™ option.

Features and Benefits

- BCA/NCC compliant
- Low 1.1W to 2.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- Lithium Iron Phosphate or Nanophosphate® battery
- Locatable sound technology
- Weatherproof option available
- Theatre version available
- Also available in blade style

LED

IP20

24m

Theatre

LNP

Sound Escape

LFP

Dynamic Signage

Universal Mount

CLEVEREVAC DYNAMIC GREEN EXIT

ORDERING INFORMATION		LP 1	LP W/SOUNDESCAPE 2	L10 1	L10 W/SOUNDESCAPE 2
TEST OPTIONS PART #	Standard - Running Man Right	DYGC-CP-RR	DYGC-CP-RR-SND	DYGL-CP-RR	DYGL-CP-RR-SND
	- Running Man Left	DYGC-CP-RL	DYGC-CP-RL-SND	DYGL-CP-RL	DYGL-CP-RL-SND
	- Running Man Up	DYGC-CP-RU	DYGC-CP-RU-SND	DYGL-CP-RU	DYGL-CP-RU-SND
	- Running Man Down	DYGC-CP-RD	DYGC-CP-RD-SND	DYGL-CP-RD	DYGL-CP-RD-SND
	- Running Man	DYGC-CP-R	DYGC-CP-R-SND	DYGL-CP-R	DYGL-CP-R-SND
	Zoneworks® XT Hive	Yes		Yes	
	Theatre Version Option	Yes	-	Yes	-
	Weatherproof Option	Yes	-	Yes	-
	Weight - single (carton)	2.0kg	2.4kg	2.0kg	2.4kg
	Dimensions (L x W x H)	367mm x 214mm x 72mm	446mm x 214mm x 72mm	367mm x 214mm x 72mm	446mm x 214mm x 72mm

* for additional variants please refer to the Clevertronics Product Guide or website.
* -NO denotes a Normally Open signal from the fire system. Normally Closed -NC also available.

POWER, LAMPS AND BATTERY	LP	LP W/ SOUNDESCAPE	L10	L10 W/ SOUNDESCAPE
Power Consumption (Standby / Max)	1.5 W / 5.0 W	4.0 W / 10.0 W	1.5 W / 5.0 W	4.0 W / 10.0 W
Lamp(s)	100,000 Hour LEDs		100,000 Hour LEDs	
Battery	Lithium Iron Phosphate	Lithium Iron Phosphate & Nickel Cadmium (Sunder Unit)	Lithium Nanophosphate	Lithium Nanophosphate & Nickel Cadmium (Sunder Unit)
Voltage (V) / Capacity (mAh)	3.2V / 2500mAh	3.2V 3200mAh / 3.6V 600mAh (Sunder Unit)	3.2V / 2500mAh	3.3V 5000mAh / 3.6V 600mAh (Sunder Unit)
Charging Method	Intelligent current limited constant voltage		Intelligent current limited constant voltage	

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained - Dynamic modes activated on VF/24V input trigger & capable of being activated in power-on & battery-backed mode.
	Normally open (NO) version – Dynamic Green and Sound activated (turned on) when contact interface is closed. Normally Closed (NC) also available.
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction- Body/Diffuser	PC/ABS body with PC diffuser
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided) Wall & Ceiling (Single Sided /w SoundEscape)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

CLASSIFICATION	LP	L10
	C0	E2.5
C90	E1.6	E1.6

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 Dynamic Green Exit
- 2 Dynamic Green Exit w/ SoundEscape™

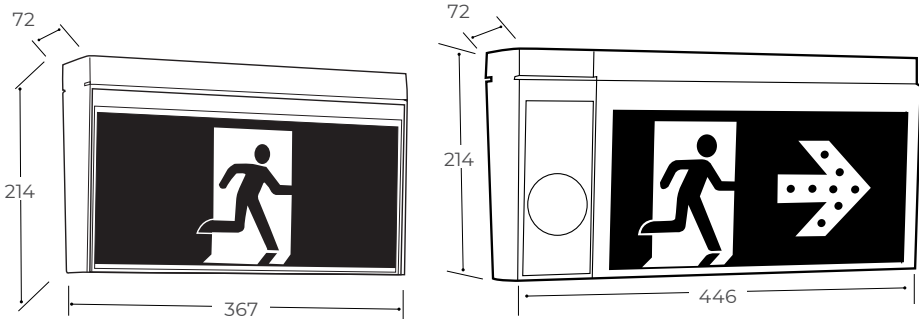

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

CLEVEREVAC DYNAMIC RED X EXIT



Dynamic RED X Exit Sign

CleverEVAC Dynamic RED X signs can be interfaced to the building's fire detection or other safety system, as designed by a fire safety engineer.

CleverEVAC Dynamic RED X sign can display a red cross, alerting those evacuating to seek an alternative exit. Dynamic RED X signs also have the Dynamic GREEN function built in.

The Dynamic RED X mode (and Dynamic GREEN mode if specified) is triggered either by 24VDC or voltage free open/close signals from the fire detection or other building safety system.

Suitable for Most Applications

- Office Buildings
- Shopping Centres
- Stadiums
- Theatres
- Car Parks
- Airports & Transit
- Schools
- Heritage Buildings

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®



Built in Dynamic GREEN function.

Features and Benefits

- AS/NZS 2293.3 compliant, in non-dynamic mode
- Low 1.1W to 2.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- Lithium Iron Phosphate or Nanophosphate® battery
- Capable of Positive Re-enforcement Dynamic GREEN
- Zoneworks® XT Hive compatible
- Weatherproof option available
- Theatre version available

LED

IP20

24m

Theatre

LNP

Dynamic Signage

LFP

Universal Mount

CLEVEREVAC DYNAMIC RED X EXIT

ORDERING INFORMATION		LP	L10
TEST OPTIONS PART #	Standard - Running Man Right	DYRC-CP-RR	DYRL-CP-RR
	- Running Man Left	DYRC-CP-RL	DYRL-CP-RL
	- Running Man Up#	DYRC-CP-RU	DYRL-CP-RU
	- Running Man Down#	DYRC-CP-RD	DYRL-CP-RD
	- Running Man^	DYRC-CP-R	DYRL-CP-R
	Zoneworks® XT Hive	Yes	Yes
	Theatre Version Option	Yes	Yes
	Weatherproof Option	Yes	Yes
	Weight - single (carton)	2.0kg	2.0kg
	Dimensions (L x W x H)	367mm x 214mm x 80mm	367mm x 214mm x 80mm

* for additional variants please refer to the Clevertronics Product Guide or website.
* -NO denotes a Normally Open signal from the fire system. Normally Closed -NC also available.


POWER, LAMPS AND BATTERY	LP		L10
Power Consumption (Standby / Max)	1.5 W / 5.0 W		
Lamp(s)	100,000 Hour LEDs		
Battery	Lithium Iron Phosphate	Lithium Nanophosphate	
Voltage (V) / Capacity (mAh)	3.2V / 2500mAh		
Charging Method	Intelligent current limited constant voltage		

TECHNICAL SPECIFICATIONS		CLASSIFICATION		
		LP	L10	
Operating Mode	Maintained –Sequencing inward green LEDs or illuminated Red X with side flashing Red LED's on closing of the VF/24V contact and capable of being activated in power-on and battery-backed mode. Normally open (NO) version – Dynamic Green or illuminated Red X when contact interface is closed.	E2.5	E2.5	
Voltage (V) Frequency (Hz)	220-240V (50Hz)	E1.6	E1.6	
Construction- Body/Diffuser	PC/ABS body with PC diffuser			
Viewing Distance	24m			
Mounting Type	Wall & Ceiling (Single & Double Sided) Wall & Ceiling (Single Sided /w SoundEscape)			
Operating Temperature	1°C to 40°C			
IP Rating (IP)	IP20			

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

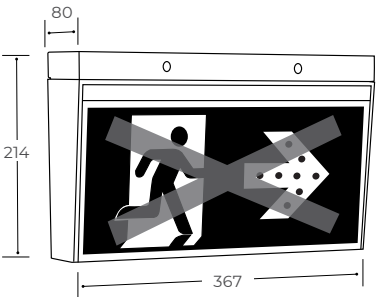

Disclaimer: Clevertronics Pty Ltd is a vendor of CleverEVAC products. It is not a fire engineer or designer. It does not purport to recommend its products for use in any particular application or to achieve any particular outcome. Purchasers and users of its products must take their own steps to ensure compliance with statutory requirements, safe practice and suitable application of the products.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

CLEVEREVAC DYNAMIC GREEN BLADE EXIT



Dynamic GREEN
Ultrablade PRO Exit Sign

The CleverEVAC Dynamic GREEN exit sign has been developed to provide an increased visibility of exit signage.

Dynamic GREEN exit signs are available with the standard running man symbol and also with directional arrow options. The Dynamic GREEN mode is triggered either by a 24VDC or voltage free open/ close signal from the fire detection or other building safety system.

The sophisticated look and design of the blade will satisfy all architectural requirements for a premium exit.

Suitable for Most Applications

- Office Buildings
- Theatres
- Stadiums
- Schools
- Shopping Centres
- Airports & Transit

LP

LITHIUM IRON
PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM
NANOPHOSPHATE

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE

Features and Benefits

- BCA/NCC compliant
- Low 1.1W to 2.7W standby power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Zoneworks® XT Hive compatible
- Theatre version available

LED

IP20

24m

Theatre


LNP

Surface Mount

LFP

Dynamic Signage

Recessed

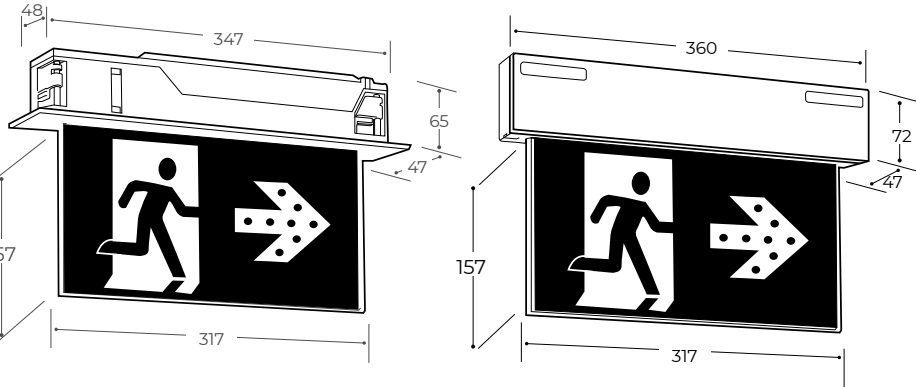

Dimensions (mm)

CLEVEREVAC DYNAMIC GREEN BLADE EXIT

ORDERING INFORMATION		LP RECESSED	LP CEILING MOUNT	LP WALL MOUNT	L10 RECESSED	L10 CEILING MOUNT	L10 WALL MOUNT
PART NUMBER	Standard - Running Man Right	DYGC-UP-RR	DYGC-UP-CM-RR	DYGC-UP-WM-RR	DYGL-UP-RR	DYGL-UP-CM-RR	DYGL-UP-WM-RR
	- Running Man Left	DYGC-UP-RL	DYGC-UP-CM-RL	DYGC-UP-WM-RL	DYGL-UP-RL	DYGL-UP-CM-RL	DYGL-UP-WM-RL
	- Running Man Up	DYGC-UP-RU	DYGC-UP-CM-RU	DYGC-UP-WM-RU	DYGL-UP-RU	DYGL-UP-CM-RU	DYGL-UP-WM-RU
	- Running Man Down	DYGC-UP-RD	DYGC-UP-CM-RD	DYGC-UP-WM-RD	DYGL-UP-RD	DYGL-UP-CM-RD	DYGL-UP-WM-RD
	- Running Man	DYGC-UP-R	DYGC-UP-CM-R	DYGC-UP-WM-R	DYGL-UP-R	DYGL-UP-CM-R	DYGL-UP-WM-R
Zoneworks® XT Hive		Yes			Yes		
Theatre Version Option		-			-		
Carton Quantity		1			1		
Weight - single (carton)		2.0kg			2.0kg		
Dimensions (L x W x H)		385mm x 67mm x 257mm	385mm x 88mm x 257mm		385mm x 67mm x 257mm	385mm x 88mm x 257mm	

* for additional variants please refer to the Clevertronics Product Guide or website.
* -NO denotes a Normally Open signal from the fire system. Normally Closed -NC also available.

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		1.5 W / 9.0 W	1.5 W / 5.0 W
Lamp(s)		100,000 Hour LEDs	100,000 Hour LEDs
Battery		Lithium Iron Phosphate	Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 3200mAh	3.2V / 2500mAh
Charging Method		Intelligent current limited constant voltage	Intelligent current limited constant voltage

TECHNICAL SPECIFICATIONS		SPARE PARTS	
Operating Mode		Battery	
Voltage (V) Frequency (Hz)		Zoneworks®XT Hive Node	
Construction- Body/Diffuser		CLASSIFICATION	
Viewing Distance		CO	
Mounting Type		C90	
Operating Temperature		IP Rating (IP)	
IP Rating (IP)		SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)	

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D5	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2
E4	6.2	6.8	6.9	7.1	7.3	7.4	7.4	0.0	0.0
C25	9.4	10.0	10.5	11.0	11.5	11.9	12.4	12.9	13.4
C32	10.0	10.7	11.3	11.8	12.3	12.8	13.4	14.0	14.5

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

CLEVEREVAC DYNAMIC RED X BLADE EXIT



Dynamic Green & Red X Exit Signage

CleverEVAC Dynamic RED X signs can be interfaced to the building's fire detection or other safety system, as designed by a fire safety engineer.


CleverEVAC Dynamic RED X sign can display a red cross, alerting those evacuating to seek an alternative exit. Dynamic RED X signs also have the Dynamic GREEN function built in.

The Dynamic RED X mode (and Dynamic GREEN mode if specified) is triggered either by 24VDC or voltage free open/close signals from the fire detection or other building safety system.

The sophisticated look and design of the blade will satisfy all architectural requirements for a premium exit.

Suitable for Most Applications

- Office Buildings
- Theatres
- Stadiums
- Schools
- Shopping Centres
- Airports & Transit

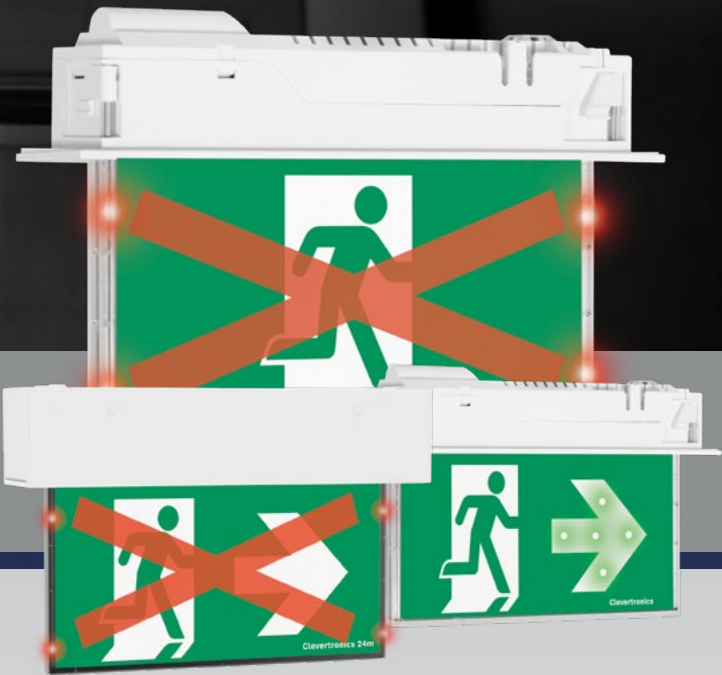

Features and Benefits

- AS/NZS 2293.3 compliant, in non-dynamic mode
- Low 1.1W to 2.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- Lithium Iron Phosphate or Nanophosphate® battery
- Negative enforcement options
- Capable of Positive Re-enforcement Dynamic GREEN
- Zoneworks® XT Hive compatible
- Theatre version available



CLEVEREVAC DYNAMIC RED X BLADE EXIT

ORDERING INFORMATION		LP RECESSED	LP CEILING MOUNT	LP WALL MOUNT	L10 RECESSED	L10 CEILING MOUNT	L10 WALL MOUNT
TEST OPTIONS PART NO	Standard - Running Man Right	DYRC-UP-RR	DYRC-UP-CM-RR	DYRC-UP-WM-RR	DYRL-UP-RR	DYRL-UP-CM-RR	DYRL-UP-WM-RR
	- Running Man Left	DYRC-UP-RL	DYRC-UP-CM-RL	DYRC-UP-WM-RL	DYRL-UP-RL	DYRL-UP-CM-RL	DYRL-UP-WM-RL
	- Running Man Up	DYRC-UP-RU	DYRC-UP-CM-RU	DYRC-UP-WM-RU	DYRL-UP-RU	DYRL-UP-CM-RU	DYRL-UP-WM-RU
	- Running Man Down	DYRC-UP-RD	DYRC-UP-CM-RD	DYRC-UP-WM-RD	DYRL-UP-RD	DYRL-UP-CM-RD	DYRL-UP-WM-RD
	- Running Man	DYRC-UP-R	DYRC-UP-CM-R	DYRC-UP-WM-R	DYRL-UP-R	DYRL-UP-CM-R	DYRL-UP-WM-R
	Zoneworks® XT Hive	Yes			Yes		
	Theatre Version Option	-			-		
Carton Quantity		1			1		
Weight - single (carton)		2.0kg			2.0kg		
Dimensions (L x W x H)		385mm x 67mm x 257mm	385mm x 88mm x 257mm		385mm x 67mm x 257mm	385mm x 88mm x 257mm	

* for additional variants please refer to the Clevertronics Product Guide or website.
* -NO denotes a Normally Open signal from the fire system. Normally Closed -NC also available.

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		1.5 W / 9.0 W	1.5 W / 5.0 W
Lamp(s)		100,000 Hour LEDs	100,000 Hour LEDs
Battery		Lithium Iron Phosphate	Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 3200mAh	3.2V / 2500mAh
Charging Method		Intelligent current limited constant voltage	Intelligent current limited constant voltage


TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained – Sequencing inward green LEDs or illuminated Red X with side flashing red LED's activated on VF/24V input trigger & capable of being activated in power-on & battery-backed mode
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction- Body/Diffuser	PC/ABS body with PC diffuser
Viewing Distance	24m
Mounting Type	Recessed, Surface Mount Options, Single-Sided
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS		LP	L10
Battery		1550030	1530230
Zoneworks®XT Hive Node		8003190	8003190

CLASSIFICATION		LP	L10
C0		E4	D5
C90		C32	C25

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)									
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
D5	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2
E4	6.2	6.8	6.9	7.1	7.3	7.4	7.4	0.0	0.0
C25	9.4	10.0	10.5	11.0	11.5	11.9	12.4	12.9	13.4
C32	10.0	10.7	11.3	11.8	12.3	12.8	13.4	14.0	14.5

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.
*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

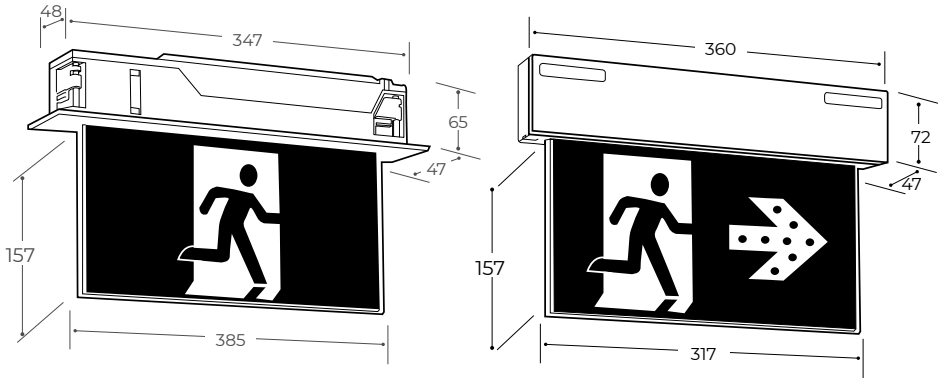

Disclaimer: Clevertronics Pty Ltd is a vendor of CleverEVAC products. It is not a fire engineer or designer. It does not purport to recommend its products for use in any particular application or to achieve any particular outcome. Purchasers and users of its products must take their own steps to ensure compliance with statutory requirements, safe practice and suitable application of the products.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



EMERGENCY LIGHTING

EMERGENCY LIGHTING

Lifelight	82	Lifelight PRO Cylinder Surface Mount	94
Lifelight Surface Mount	84	Lifelight PRO IP44 Splash-Proof	96
Lifelight IP44 Splash-Proof	86	Lifelight PRO Weatherproof	98
Lifelight Weatherproof	88	Lifelight PRO Low Temperature	100
Lifelight PRO	90	Weatherproof Emergency POD	102
Lifelight PRO Surface Mount	92	Supalite	104

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



LED Recessed
Emergency Light

The Lifelight provides a D40 emergency classification in a sleek architectural design. With market-leading lithium battery technology and energy efficient LEDs the Lifelight will deliver lower maintenance and energy costs.

As the first LED emergency light on the market, the Lifelight continues to lead the way in a variety of emergency lighting applications.

Applications

- Office Buildings
- Apartments
- Schools
- Retail outlets

EL

LITHIUM IRON
PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON
PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM
NANOPHOSPHATE

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- 145mm adaptor plate for retrofitting
- Low Power consumption
- Spring clips for easy installation
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours available on request

LED

IP20

Recessed

D40

Non-Maintained

LFP

LNP

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard - White	ELIFE-X-LI	CLIFE	LLIFE
	Standard - Black	-	CLIFE-BLK	LLIFE-BLK
	Clevertest Plus System Compatible	-	Yes	Yes
	DALI	-	CLIFE-DALI	LLIFE-DALI
	Zoneworks® XT Hive	-	CLIFE-HV	LLIFE-HV
Carton Quantity		10 pieces		
Weight - single (carton)		0.5kg (8.2kg)	0.8kg (9.7kg)	
Dimensions (L x W x H) - Control Pack		232mm x 51mm x 42mm		
Dimensions - Head Diameter		95mm		
Dimensions - Adaptor plate		145mm		
Ceiling hole cut-out		85mm		
Minimum Ceiling Depth		120mm		

POWER, LAMPS AND BATTERY		EL	LP	L10
Power Consumption (Standby / Max)		0.3W / 1.3W	1.0W / 3.9W	1.3W / 3.0W
Lamp(s)		1 x LED		
Battery		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		


TECHNICAL SPECIFICATIONS		SPARE PARTS		
		EL	LP	L10
Operating Mode	Non-Maintained	1560150	1550010	1530010
Voltage (V) Frequency (Hz)	220-240V (50Hz)	-	8003060	8003060
Operating Temperature	1°C to 40°C	-	8003190	8003190
Ingress Protection Rating (IP)	IP20	-	-	-

CLASSIFICATION	EL	LP	L10
C0	D40	D40	D40
C90	D40	D40	D40

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

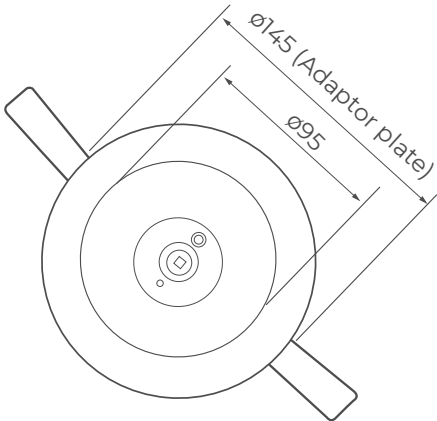

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT SURFACE MOUNT EMERGENCY



LED Surface Mount
Emergency Light

The newly designed Lifelight Surface Mount provides a D40 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight Surface Mount delivers low maintenance and energy costs.

Applications

- 

Office Buildings
- 

Apartments
- 

Schools
- 

Retail outlets

EL

LITHIUM IRON
PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON
PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM
NANOPHOSPHATE*

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE*

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- Low Power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours available on request (LP & L10 only)



LED



IP20



Surface Mount



D40



Non-Maintained



LFP



LNP

LIFELIGHT SURFACE MOUNT EMERGENCY

ORDERING INFORMATION		EL	LP	L10
PART NO.	Standard - White	ELIFE-X-LI-SM	CLIFE-SM	LLIFE-SM
	Standard - Black	-	CLIFE-SM-BLK	LLIFE-SM-BLK
	Clevertest Plus System Compatible	No	Yes	
	DALI	-	CLIFE-SM-DALI	LLIFE-SM-DALI
	Zoneworks® XT Hive	-	CLIFE-SM-HV	LLIFE-SM-HV
Carton Quantity		10 pieces		
Weight - single		0.6kg		
Dimensions (L x W x H)		242mm x 125mm x 48mm		

POWER, LAMPS AND BATTERY	EL	LP	L10
Power Consumption (Standby / Max)	0.4W / 1.3W	1.0W / 4.2W	1.0W / 2.7W
Lamp(s)	1 x LED		
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		


TECHNICAL SPECIFICATIONS		SPARE PARTS		
		EL	LP	L10
Operating Mode	Non-Maintained	1560160	1550030	1530071
Voltage (V) Frequency (Hz)	220-240V (50Hz)	-	8003060	8003060
Operating Temperature	1°C to 40°C	-	8003190	8003190
IP Rating (IP)	IP20	-	-	-

CLASSIFICATION	EL	LP	L10
C0	D40	D40	D40
C90	D40	D40	D40

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)													
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

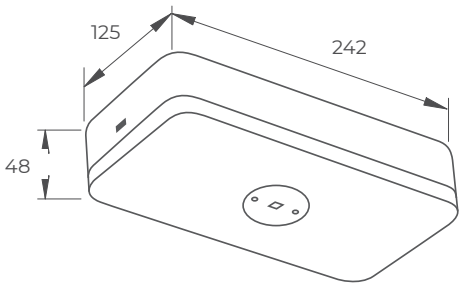

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT IP44 SPLASHPROOF








Recessed Lifelight with
Splashproof Head



The Splashproof Lifelight is a recessed emergency luminaire that is designed for use in applications where an IP44 rating is required.

Complete with Lithium Iron phosphate batteries to ensure low maintenance requirements.

Applications

-  Bathrooms
-  Aquatic Centres
-  Schools
-  Public Amenities
-  Gyms



Features and Benefits

- AS/NZS 2293.3 compliant
- LED lamp
- IP44 splashproof
- D40 and D50 emergency classification
- Lithium Iron Phosphate or Nanophosphate battery
- Clevertest Plus System compatible



LIFELIGHT IP44 SPLASHPROOF

ORDERING INFORMATION		LP	L10
PART NO.	Standard - White	CLIFE-RECSP	LLIFE-RECSP
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-RECSP-DALI	LLIFE-RECSP-DALI
	Zoneworks® XT Hive	CLIFE-RECSP-HV	LLIFE-RECSP-HV
Carton Quantity		1	
Weight - single (carton)		0.8kg	
Dimensions (L x W x H)		232mm X 51mm X 42mm (Control Pack) 95mm Head diameter	

POWER, LAMPS AND BATTERY	LP	L10
Power Consumption (Standby / Max)*	1W / 4.2W	1W / 4.2W
Lamp(s)	Single LED	Single LED
Battery	Lithium Iron Phosphate	Lithium Nanophosphate
Voltage (V) / Capacity (mAh)	3.2V 3200mAh	3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS	LP	L10
Operating Mode	Non-maintained	
Voltage (V) (Frequency (Hz))	240V AC; 50Hz	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP) (Parts below ceiling)	IP44	
Ingress Protection Rating (IP) (Parts above ceiling)	IP20	



CLASSIFICATION	LP		SPARE PARTS	LP	L10
	D50	D40			
C0	D50	D40	Battery	1550010	1530010
C90	D50	D40	LED	8050260	8050260

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

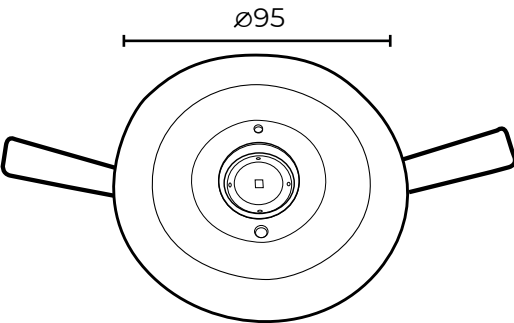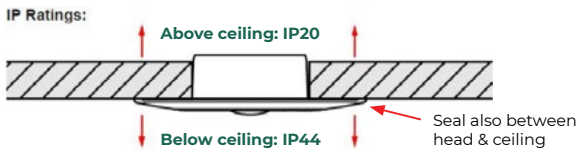

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT SURFACE MOUNT WEATHERPROOF

LIFELIGHT SURFACE MOUNT WEATHERPROOF






Weatherproof LED
Emergency Luminaire



The Lifelight surface mount weatherproof emergency luminaire is designed for use in applications where an IP65 rating is required

The slimline high impact IK08 polycarbonate enclosure makes installation easy and provides robustness in open areas.

Applications

-  Office Buildings
-  Apartments
-  Schools
-  Aquatic Centers
-  Car Parks

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE

Features and Benefits

- AS/NZS 2293.3 compliant
- Low power consumption
- D40 or D50 classification
- IP65 & IK08
- Lithium Iron Phosphate or Nanophosphate battery
- Clevertest Plus System compatible
- Available in white or black

 LED

 IP65

 Surface Mount

 D40

 Non-Maintained

 D50

 LFP

 IK08

 LNP

ORDERING INFORMATION		EL	LP	L10
PART NO.	Type	Integral	Integral	Integral
	Standard - White	ELIFE-X-LI-SM-WP	CLIFE-SM-WP	LLIFE-SM-WP
	Clevertest Plus System Compatible	Yes		
	DALI	-	CLIFE-SM-WP-DALI	LLIFE-SM-WP-DALI
	Zoneworks® XT Hive	-	CLIFE-SM-WP-HV	LLIFE-SM-WP-HV
Carton Quantity		10 pieces		
Weight - single (carton)		0.8kg	0.8kg	0.8kg
Dimensions (L x W x H)		247mm x 129mm x 51mm	247mm x 129mm x 51mm	247mm x 129mm x 51mm
POWER, LAMPS AND BATTERY		EL	LP	L10
Power Consumption (Standby / Max)*		0.4W / 1.3W	1W / 4.2W	1W / 4.2W
Lamp(s)		LED		
Battery		Lithium Iron Phosphate	Lithium Iron Phosphate	Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 3200mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	EL	LP	L10
Operating Mode	Non-Maintained		
Voltage (V) (Frequency (Hz))	240V (50HZ)		
Operating Temperature	0°C to 40°C		
Ingress Protection Rating (IP)	IP65		

CLASSIFICATION	EL	LP	L10	SPARE PARTS		
C0	D50	D50	D40	Battery	1560160	1550030
				DALI Node	-	8003060
C90	D50	D50	D40	Zoneworks® XT Hive Node	-	8003190


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

Dimensions (mm)

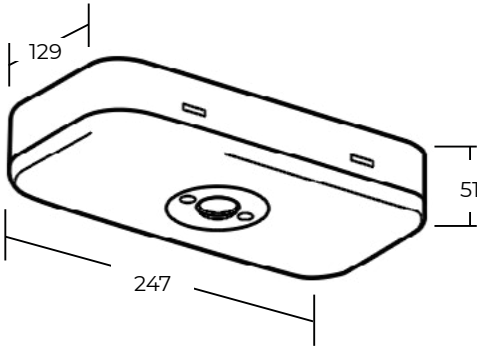

LIFELIGHT PRO RECESSED EMERGENCY



Premium LED
Emergency Light

The Lifelight PRO is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design. The D80 classification of the Lifelight PRO provides an amazing 60% increase in emergency lighting coverage compared to many existing emergency lights on the market.

Suitable in a variety of applications the Lifelight PRO will provide outstanding performance and will reduce installation and maintenance costs.

Applications

- Office Buildings
- Showrooms
- Galleries
- Retail outlets
- Apartments
- Theatres



Features and Benefits

- AS/NZS 2293.3 compliant
- D80 classification
- 95mm adaptor plate for retrofitting
- Low 0.4W power consumption
- Spring clips for easy installation
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black (other colours on request)
- Round or Square head



LIFELIGHT PRO RECESSED EMERGENCY

ORDERING INFORMATION		LP		L10	
PART NO.	Standard - White	CLIFE-PRO	CLIFE-PRO-SQ	LLIFE-PRO	LLIFE-PRO-SQ
	Standard - Black	CLIFE-PRO-BLK	CLIFE-PRO-SQ-BLK	LLIFE-PRO-BLK	LLIFE-PRO-SQ-BLK
	Clevertest Plus System Compatible	Yes			
	DALI	CLIFE-PRO-DALI	CLIFE-PRO-SQ-DALI	LLIFE-PRO-DALI	LLIFE-PRO-SQ-DALI
	Zoneworks® XT Hive	CLIFE-PRO-HV	CLIFE-PRO-SQ-HV	LLIFE-PRO-HV	LLIFE-PRO-SQ-HV
Carton Quantity		10 pieces			
Weight - single (carton)		0.8kg (9.7kg)			
Dimensions (L x W x H) - Control Pack		232mm x 40mm x 40mm			
Dimensions - Head Diameter		60mm			
Dimensions - Adaptor plate		95mm	-	95mm	-
Ceiling hole cut-out		51mm			
Minimum Ceiling Depth		200mm			

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		0.4W / 2.7W	
Lamp(s)		2 x LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) /Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS		LP	L10
Operating Mode	Non-Maintained		
Voltage (V) Frequency (Hz)	220-240V (50Hz)		
Operating Temperature	1°C to 40°C		
IP Rating (IP)	IP20		

SPARE PARTS		LP	L10
Battery		1550230	1530230
DALI Node		8003060	8003060
Zoneworks® XT Hive Node		8003191	8003191

CLASSIFICATION		LP	L10
C0		D80	D80
C90		D80	D80


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

- Product Configuration:
- 1 Round Head
 - 2 Square Head

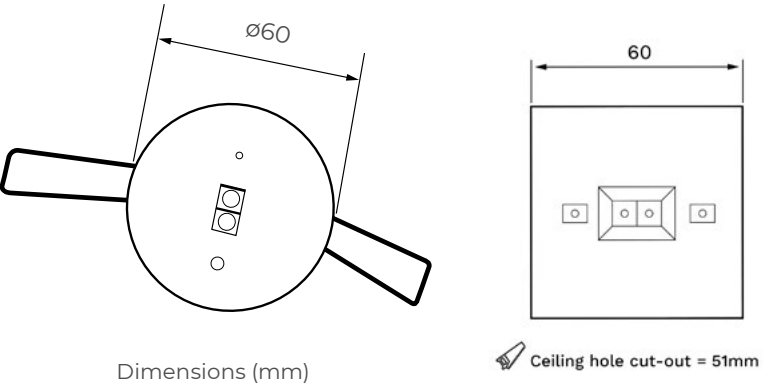

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT PRO SURFACE MOUNT EMERGENCY



Premium LED
Emergency Light

The newly designed Lifelight PRO Surface Mount provides a D80 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight PRO Surface Mount delivers lower maintenance and energy costs.

Applications

-  Office Buildings
-  Showrooms
-  Galleries
-  Retail Outlets
-  Apartments
-  Theatres



Features and Benefits

- AS/NZS 2293.3 compliant
- D80 classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours on request



LIFELIGHT PRO SURFACE MOUNT EMERGENCY

ORDERING INFORMATION		LP	L10
PART NO.	Standard - White	CLIFE-PRO-SM	LLIFE-PRO-SM
	Standard - Black	CLIFE-PRO-SM-BLK	LLIFE-PRO-SM-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SM-DALI	LLIFE-PRO-SM-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SM-HV	LLIFE-PRO-SM-HV
Carton Quantity		10 pieces	10 pieces
Weight - single		0.7kg	0.7kg
Dimensions (L x W x H)		242mm x 125mm x 48mm	

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		0.4W / 4.7W	
Lamp(s)		2 x LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS		SPARE PARTS		LP	L10
Operating Mode		Battery		1550231	1530231
Voltage (V) Frequency (Hz)		DALI Node		8003060	8003060
Operating Temperature		Zoneworks® XT Hive Node		8003191	8003191
IP Rating (IP)					
		IP20			


CLASSIFICATION		LP	L10
C0		D80	D80
C90		D80	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

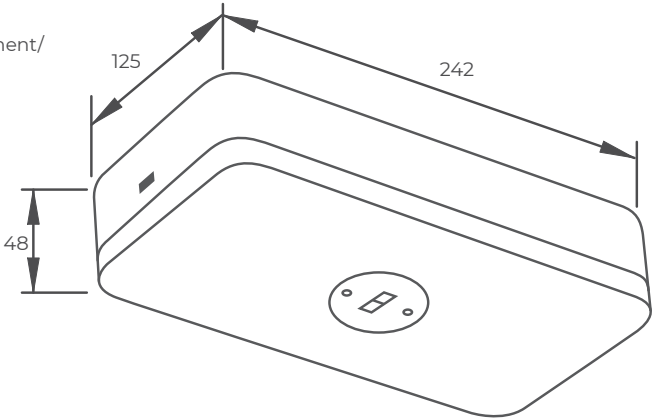

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT PRO CYLINDER SURFACE MOUNT EMERGENCY



Premium LED
Emergency Light

The Lifelight Pro Cylinder is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design. The D80 classification of the Lifelight Pro provides an amazing 60% increase in emergency lighting coverage compared to many existing emergency lights on the market.

Suitable in a variety of applications the Lifelight Pro will provide outstanding performance and too many will reduce installation and maintenance costs.

Applications

- Office Buildings
- Showrooms
- Galleries
- Retail Outlets
- Apartments
- Theatres

LP

LITHIUM IRON
PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM
NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- D80 classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black (other colours on request)

LIFELIGHT PRO CYLINDER SURFACE MOUNT EMERGENCY

ORDERING INFORMATION		LP	L10
TEST OPTIONS / PART #	Standard - White	CLIFE-PRO-SMC	LLIFE-PRO-SMC
	Standard - Black	CLIFE-PRO-SMC-BLK	LLIFE-PRO-SMC-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SMC-DALI	LLIFE-PRO-SMC-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SMC-HV	LLIFE-PRO-SMC-HV
Carton Quantity		1 piece	1 piece
Weight - single		1.9kg	1.9kg
Dimensions (L x W x H)		128mm (D) x 245mm	128mm (D) x 245mm

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)		0.4W / 2.7W	
Lamp(s)		2 x LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	


TECHNICAL SPECIFICATIONS		SPARE PARTS	
Operating Mode	Non-Maintained	LP	L10
Voltage (V) Frequency (Hz)	220-240V (50Hz)	1550230	1530230
Operating Temperature	1°C to 40°C	8003060	8003060
IP Rating (IP)	IP20	8003191	8003191
		Zoneworks® XT Hive Node	

CLASSIFICATION		LP	L10
C0		D80	D80
C90		D80	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

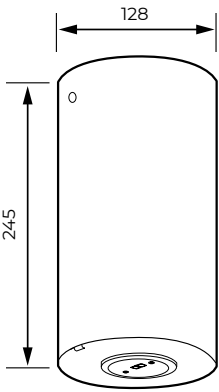

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT PRO IP44 SPLASHPROOF







Recessed Lifelight Pro with Splashproof Head



The Splashproof Lifelight Pro is an energy efficient, Lithium powered LED emergency light for use in applications where an IP44 rating is required.

Featuring a sleek design and D80 emergency classification, the Splashproof Lifelight Pro will provide outstanding performance and reduce installation and maintenance costs.

Applications

-  Bathrooms
-  Aquatic Centres
-  Schools
-  Public Amenities
-  Gyms



Features and Benefits

- AS/NZS 2293.3 compliant
- LED lamp
- IP44 splashproof
- D80 emergency classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate battery
- Clevertest Plus System compatible



LIFELIGHT PRO IP44 SPLASHPROOF

ORDERING INFORMATION		LP	L10
PART NO.	Standard - White	CLIFE-PRO-RECSP	LLIFE-PRO-RECSP
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-RECSP-DALI	LLIFE-PRO-RECSP-DALI
	Zoneworks® XT Hive	CLIFE-PRO-RECSP-HV	LLIFE-PRO-RECSP-HV
Carton Quantity		1	
Weight - single (carton)		0.8kg	
Dimensions (L x W x H)		232mm X 51mm X 42mm (Control Pack) 60mm Head diameter	
POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)*		0.4W / 2.7W	0.4W / 2.7W
Lamp(s)		Dual LED	Dual LED
Battery		Lithium Iron Phosphate	Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS	LP	L10
Operating Mode	Non-maintained	
Voltage (V) (Frequency (Hz))	240V AC; 50Hz	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP) (Parts below ceiling)	IP44	
Ingress Protection Rating (IP) (Parts above ceiling)	IP20	



CLASSIFICATION	LP	L10	SPARE PARTS	LP	L10
C0	D80	D80	Battery	1550230	1530230
C90	D80	D80	LED	8050250	8050250

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

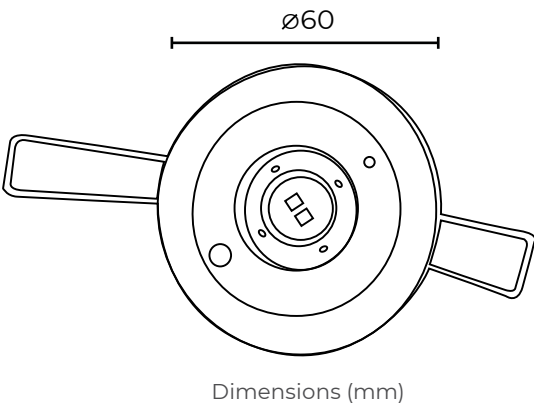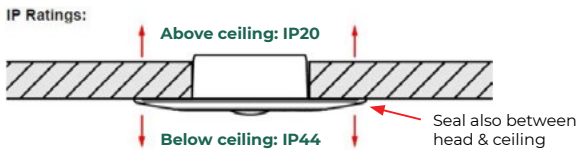

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT PRO SURFACE MOUNT WEATHERPROOF



High Performance Weatherproof LED Emergency Luminaire



The Lifelight PRO surface mount weatherproof emergency luminaire has a D80 classification and is designed for use in applications where an IP65 rating is required.

The slimline high impact IK08 polycarbonate enclosure makes installation easy and provides robustness in open areas.

Applications

- Apartments
- Schools
- Car Parks
- Aquatic Centers
- Public Buildings



Features and Benefits

- AS/NZS 2293.3 compliant
- D80 emergency classification
- IP65 and IK08
- Low 0.4W Power consumption
- Lithium Iron Phosphate or Nanophosphate battery
- Clevertest Plus System compatible
- Available in White or Black



LIFELIGHT PRO SURFACE MOUNT WEATHERPROOF

ORDERING INFORMATION		LP	L10
PART NO.	Type	Integral battery	Integral battery
	Standard - White	CLIFE-PRO-SM-WP	LLIFE-PRO-SM-WP
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SM-WP-DALI	LLIFE-PRO-SM-WP-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SM-WP-HV	LLIFE-PRO-SM-WP-HV
Carton Quantity		10 pieces	
Weight - single (carton)		0.8kg	0.8kg
Dimensions (L x W x H)		247mm x 129mm x 51mm	247mm x 129mm x 51mm

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)*		0.4W / 2.7W	0.4W / 2.7W
Lamp(s)		Dual LED	
Battery		Lithium Iron Phosphate	Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS		LP	L10
Operating Mode		Non-Maintained	
Voltage (V) (Frequency (Hz))		240V AC (50HZ)	
Operating Temperature		0°C to 40°C	
Ingress Protection Rating (IP)		IP65	

CLASSIFICATION	LP		SPARE PARTS	LP	L10
	LP	L10		LP	L10
C0	D80	D80	Battery	1550231	1530231
C90	D80	D80	DALI Node	8003060	8003060
			Zoneworks® XT Hive Node	8003191	8003191


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22	24.7	27.5	28.9	30	30.9	31.5	32.1

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Dimensions (mm)

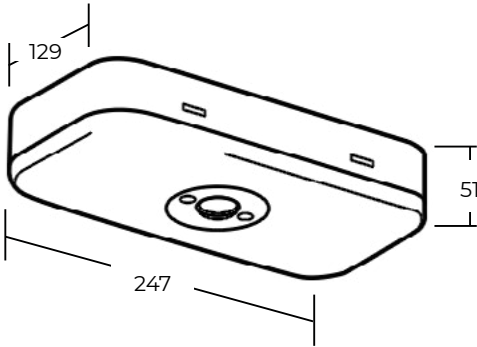

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LOW TEMPERATURE EMERGENCY



Emergency Lighting for Low Temperature Applications

The Low Temperature Emergency lighting range is designed for cool room and freezer applications where the temperature can drop to -40°C.

The range comprises of an integrated option that is rated for -25°C and a remote control gear option that will handle -40°C.

Both options are constructed with polycarbonate enclosures and are rated IP66/67.

Applications

-  Cool Rooms
-  Freezers
-  Food Processing
-  Alpine Regions

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE®

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE®

Features and Benefits

- AS/NZS 2293.3 compliant
- LED Lamps
- IP66/67 Weatherproof
- IK08 Impact rating
- 25°C and -40°C options
- Clevertest Plus System compatible









LOW TEMPERATURE EMERGENCY

ORDERING INFORMATION		LP 1 2	L10 1 2	L10 3
PART NO.	Standard	CLIFE-PRO-WP-IPREM	LLIFE-PRO-WP-IPREM	LWPLIFE-PRO-FZR
	Clevertest Plus System Compatible	Yes	Yes	Yes
	DALI	CLIFE-PRO-WP-DALI-IPREM	LLIFE-PRO-WP-DALI-IPREM	LWPLIFE-PRO-FZR-DALI
	Zoneworks® XT Hive	CLIFE-PRO-WP-HV-IPREM	LLIFE-PRO-WP-HV-IPREM	LWPLIFE-PRO-FZR-HV
Carton Quantity		1		
Weight - single (carton)		1.4kg		3.5kg
Dimensions (L x W x H) - Control Pack		232mm x 40mm x 40mm		380mm x 190mm x 130mm
Dimensions (L x W x H) - Head		122mm x 120mm x 75mm		122mm x 120mm x 75mm

POWER, LAMPS AND BATTERY		LP 1 2	L10 1 2	L10 3
Power Consumption (Standby / Max)		0.4W / 4.7W	0.4W / 4.7W	0.4W / 2.7W
Lamp(s)		Dual LED (Lifetime warranty on the Lamp head and loom Assembly)		
Battery		Lithium Iron Phosphate	Lithium Nanophosphate®	Lithium Nanophosphate®
Voltage / Capacity (mAh)		3.2V / 6400mAh	3.3V / 5000mAh	3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	LP 1 2	L10 1 2	L10 3
Operating Mode	Non-Maintained		
Voltage (V) (Frequency (Hz))	240V AC (50HZ)		
Operating Temperature	1°C to 40°C (Control Pack) -40°C to 40°C (Lamp Head)		-25°C to 40°C
Ingress Protection Rating (IP)	IP66		IP66/67
Impact Rating (IK)	IK08		

SPARE PARTS	LP 1 2	L10 1 2	L10 3
Battery	1550230	1530230	1530230 (x2)
DALI Node	8003060	8003060	8003060
Zoneworks® XT Hive Node	8003190	8003190	8003191

CLASSIFICATION	LP 1 2	L10 1 2	L10 3
C0	D63	D63	D50
C90	D63	D63	D50

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.00	24.5	25.2	26.4	27.3	28.0	28.5	28.8


Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 Surface Mount with WP Remote Enclosed Gear (-40°C)
- 2 Surface Mount with Integral Gear (-25°C)

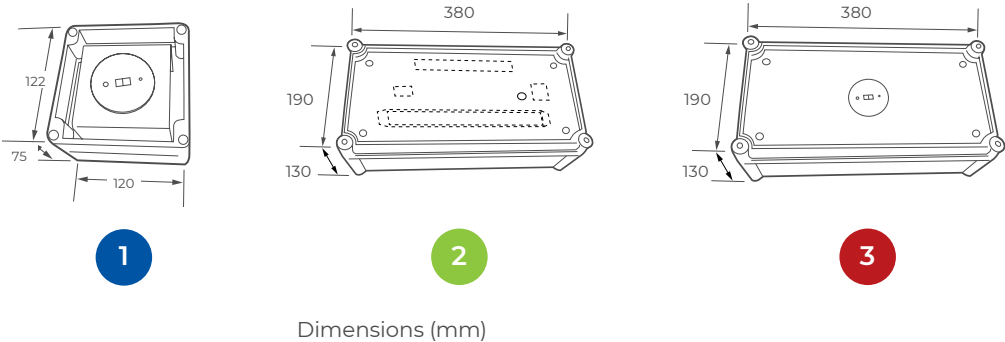

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

WEATHERPROOF EMERGENCY POD



Weatherproof LED
Emergency light



The Weatherproof Emergency Pod is perfect for external applications where moisture or dust is present like car parks and storage areas.

Constructed with a polycarbonate enclosure with an IP65 rating and D40 and D80 classification options.

With market leading lithium battery technology and energy efficient LEDs the Weatherproof Emergency POD will also deliver lower maintenance and energy costs.

Applications

- Warehouses
- Schools
- Factories
- Public Amenities
- Car Parks
- Stairwells



Features and Benefits

- AS/NZS 2293.3 compliant
- LED lamps
- IP65 Weatherproof
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible



WEATHERPROOF EMERGENCY POD

ORDERING INFORMATION		LP		L10
PART #	Standard - White	CWPLIFE-WPPOD	CWPLIFE-PRO-WPPOD	LWPLIFE-PRO-WPPOD
	Clevertest Plus System Compatible	Yes		
	DALI	CWPLIFE-WPPOD-DALI	CWPLIFE-PRO-WPPOD-DALI	LWPLIFE-PRO-WPPOD-DALI
	Zoneworks® XT Hive	CWPLIFE-WPPOD-HV	CWPLIFE-PRO-WPPOD-HV	LWPLIFE-PRO-WPPOD-HV
Carton Quantity		1 piece		
Weight - single (carton)		1.8kg	1.6kg	1.6kg
Dimensions (L x W x H) - Control Pack		325mm x 150mm x 100mm		

POWER, LAMPS AND BATTERY		LP		L10
Power Consumption (Standby / Max)		1.0W / 4.2W		0.4W / 2.7W
Lamp(s)		1 x LED		2 x LED
Battery		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Capacity (mAh)		3.2V / 3200mAh		3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	0°C to 40°C
IP Rating (IP)	IP65

SPARE PARTS	LP		L10
Battery	1550050	1550230	1530230
DALI Node	8003060		8003060
Zoneworks® XT Hive Node	8003191		8003191


CLASSIFICATION	LP		L10
C0	D40	D80	D80
C90	D40	D80	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

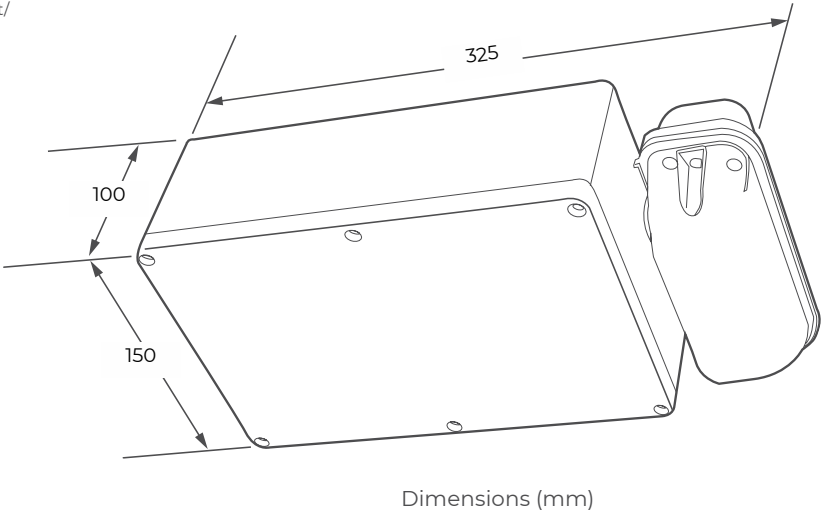

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LED Emergency Flood Light

The Supalite LED Flood is available in a standard or IP65 weatherproof and is ideal for applications such as loading bays, car parks and evacuation points

Market leading lithium battery technology delivers lower maintenance costs and LED lamps provide a low standby power rating that will reduce energy costs significantly.

Applications

- Warehouses

Factories

Schools
- Car Parks

Sports Facilities

Railway Stations

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PRODUCT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE*

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE*

ORDERING INFORMATION		EL ①	LP ①	LP WEATHERPROOF ②	L10 ①	L10 WEATHERPROOF ②
TEST OPTIONS PART #	Standard - White	EFLLED-LI	CFLLLED	CWFLED	LFLLLED	LWFLED
	Standard - Black	-	CFLLED-BLK	CWFLED-BLK	LFLLLED-BLK	LWFLED-BLK
	Clevertest Plus System Compatible	No	Yes			
	DALI	-	CFLLED-DALI	CWFLED-DALI	LFLLLED-DALI	LWFLED-DALI
	Zoneworks® XT Hive	-	CFLLED-HV	CWFLED-HV	LFLLLED-HV	LWFLED-HV
Carton Quantity		10	10	1	10	1
Weight - single (carton)		1.4kg (15.2kg)	1.4kg (15.2kg)	3.6kg	1.4kg (15.2kg)	3.6kg
Dimensions (L x W x H)		282mm x 64mm x 225mm	282mm x 64mm x 225mm	380mm x 130mm x 310mm	282mm x 64mm x 225mm	380mm x 130mm x 310mm

POWER, LAMPS AND BATTERY		EL	LP	LP W/PROOF	L10	L10 W/PROOF
Power Consumption (Standby / Max)		0.4W / 2.4W	0.4W / 1.7W	1.0W / 5.4W	0.4W / 2.2W	1.0W / 5.4W
Lamp(s)		2 x LED Heads				
Lumen Output (Per Head / Total)		175lm / 350lm	185lm / 350lm	600lm / 1200lm	185lm / 370lm	495lm / 990lm
Battery		Lithium Iron Phosphate			Lithium Nanophosphate®	
Voltage / Capacity (mAh)		3.2V / 6000mAh	3.2V / 6400mAh	6.4V / 3200mAh	3.3V / 5000mAh	6.6V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage				


TECHNICAL SPECIFICATIONS		EL	LP	LP W/PROOF	L10	L10 W/PROOF
Operating Mode		Non-Maintained				
Voltage (V) (Frequency (Hz))		220-240V(50Hz)				
Operating Temperature		1°C to 40°C	1°C to 40°C	0°C to 40°C	1°C to 40°C	0°C to 40°C
Ingress Protection Rating (IP)		IP20	IP20	IP65	IP20	IP65

SPARE PARTS		EL	LP	LP W/PROOF	L10	L10 W/PROOF
Battery		1560250	1550230	1550290	1530230	1530190
DALI Node		-	8003060	8003060	8003060	8003060
Zoneworks® XT Hive Node		-	8003190	8003190	8003190	8003190

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- 1 Supalite
- 2 Weatherproof Supalite

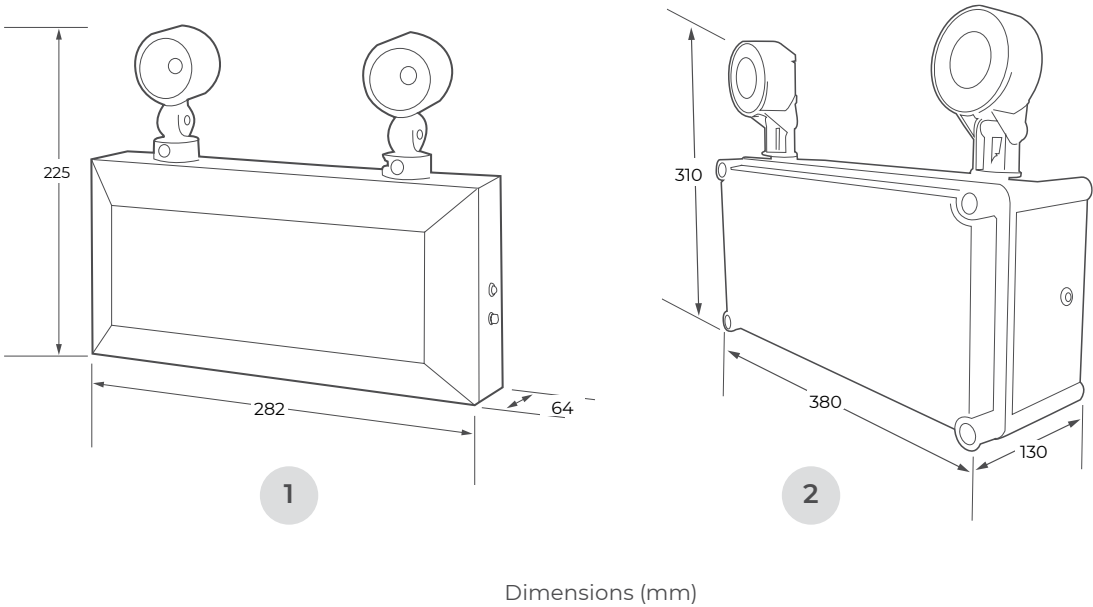

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.




CIRCULAR & BULKHEADS

CIRCULARS & BULKHEADS

Argonaut Square	108
Circlite	110
Premium Circlite	112
Bunkalite	114

ARGONAUT SQUARE

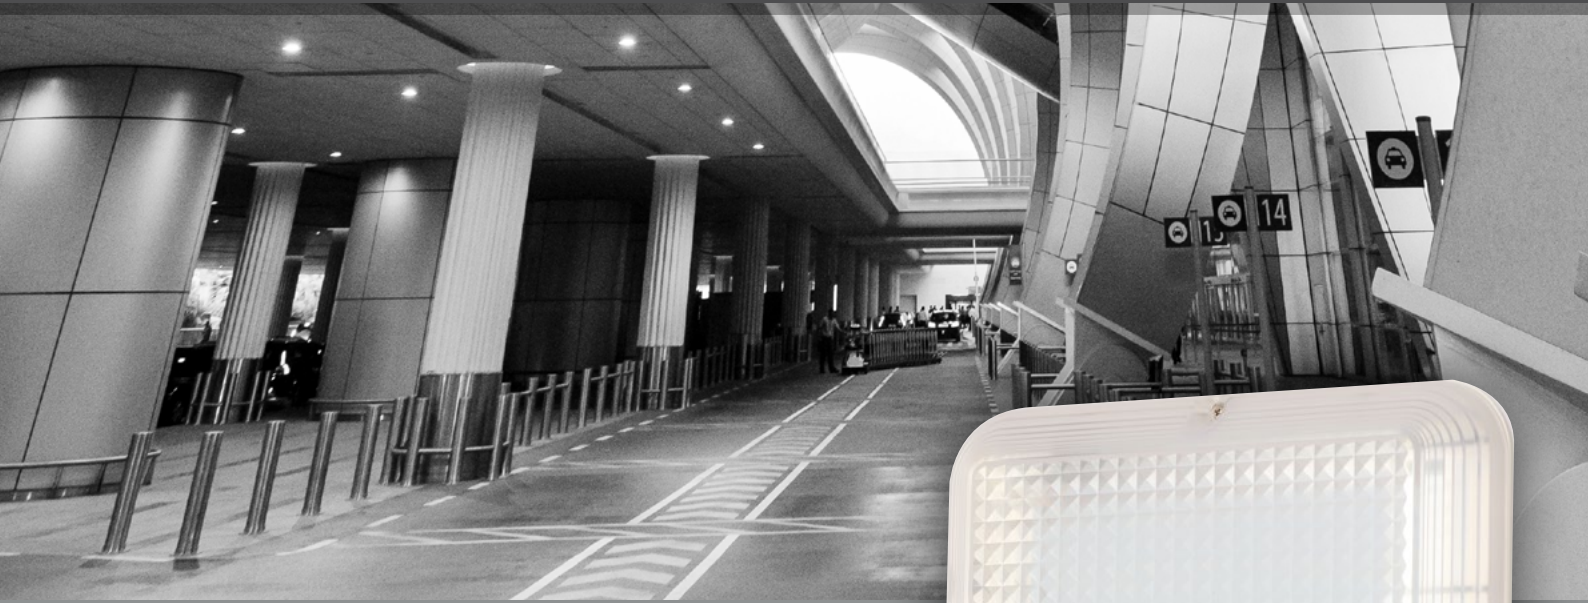

Square LED
Emergency Light

The Argonaut Square is an IP65 and IK10 rated luminaire that is ideal for applications such as car parks, corridors, stairwells and walkways.

Market leading lithium battery technology provides lower maintenance costs and LED lamps combined with high/low sensors provides an opportunity to reduce energy costs significantly.

Constructed with a die cast Aluminium body and polycarbonate diffuser the Argonaut square provides a robust and decorative emergency lighting solution.

Applications

- Apartments
- Car Parks
- Factories
- Public Amenities
- Schools
- Sports Facilities



Features and Benefits

- AS/NZS 2293.3 compliant
- IP65 Weatherproof
- IK10 Impact rating
- Die cast Aluminium body
- LED lamps
- Lithium Iron Phosphate battery
- Clevertest Plus System compatible
- Microwave Sensor Option



ARGONAUT SQUARE

ORDERING INFORMATION		LP		240V	
PART NO	Standard - White	CWSQLEDM	CWSQLEDM-MS-HL	FWSQLED	FWSQLED-MS-HL
	Clevertest Plus System Compatible	Yes	Yes	-	-
	DALI	CWSQLEDM-DALI	CWSQLEDM-MS-HL-DALI	-	-
	Zoneworks® XT Hive	CWSQLEDM-HV	CWSQLEDM-MS-HL-HV	-	-
Carton Quantity		4			
Weight - single (carton)		3.4kg (14.0kg)	3.4kg (14.5kg)	3.0kg (12.0kg)	3.0kg (12.5kg)
Dimensions (L x W x H)		315mm x 315mm x 100mm			

POWER, LAMPS AND BATTERY		LP		240V	
Power Consumption (Standby / Max)		1.0W / 24W	8.0W / 24W	23W	6.8W / 23W
Lamp(s)		2 x LED Module 4000K / 50,000hrs (L70 / 1350 Ta40)			
Total Lumen Output		2450lm	2450lm	2450lm	2450lm
Voltage (V) /Capacity (mAh)		3.3V / 5000mAh		-	
Battery		Lithium Iron Phosphate		-	
Voltage / mAh		6.4V / 3200mAh	6.4V / 3200mAh	-	-
Charging Method		Intelligent Current Limited Constant Voltage		-	

TECHNICAL SPECIFICATIONS	LP	240V
Operating Mode	Maintained	Non-Emergency
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	
Operating Temperature	0°C to 40°C	
Ingress Protection (IP)	IP65	
Impact Rating (IK)	IK10	

SPARE PARTS		LP
Battery	1550290	
DALI Node	8003065	
Zoneworks® XT Hive Node	8003190	


CLASSIFICATION		LP
C0	D50	
C90	D50	

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8


■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

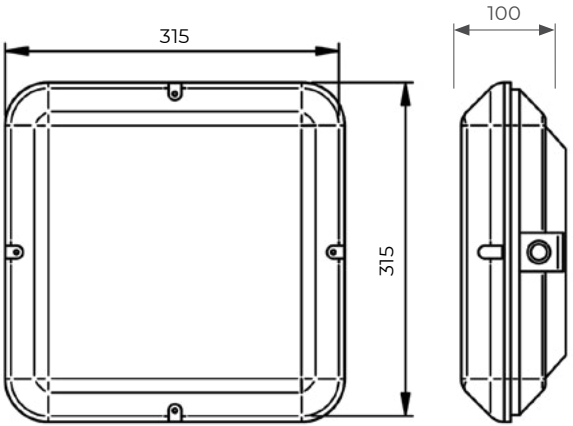

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

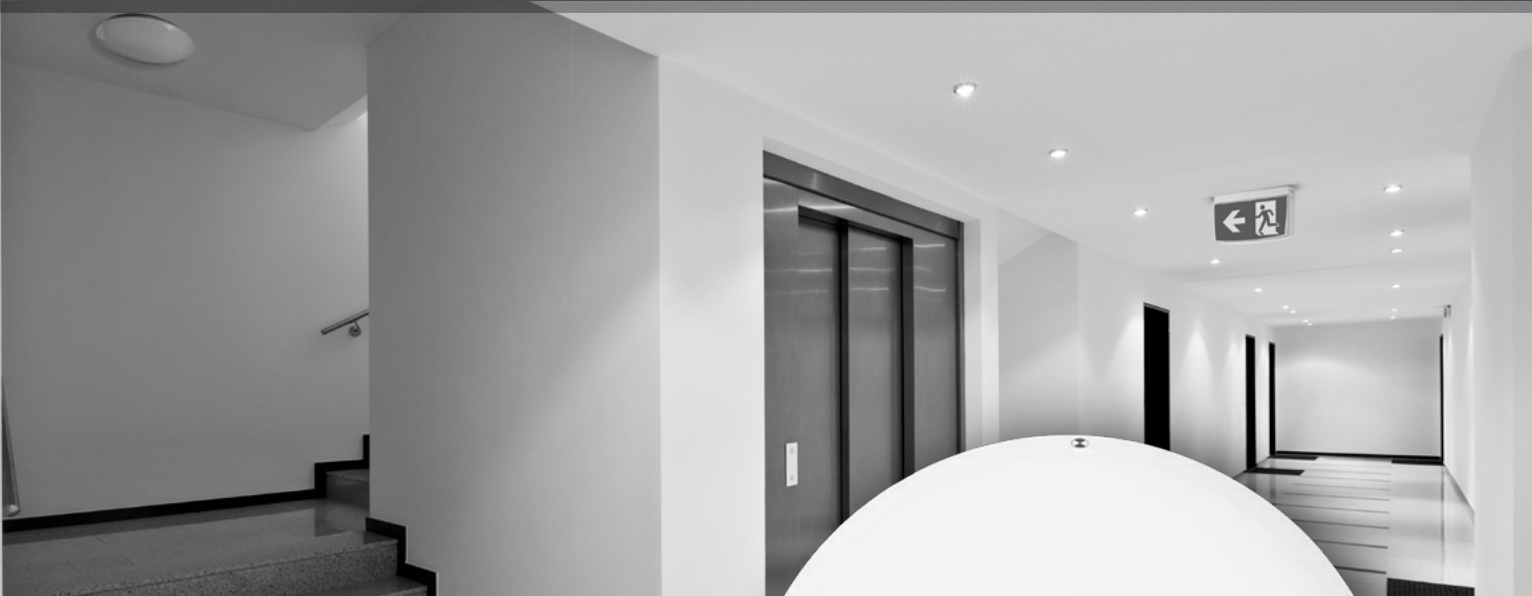

LED Circular
Emergency light

The Circlite is an IP44 rated luminaire that is ideal for applications such as corridors, stairwells and walkways.

Constructed with a polycarbonate body and opal acrylic diffuser and with a large terminal block the Circlite is also easy to install.

With an emergency classification of D32, LED technology and available with microwave sensor technology the Circlite is a leader in this space.

Applications

- Office Buildings
- Car Parks
- Public Amenities
- Railway Stations
- Schools
- Sports Facilities



Features and Benefits

- AS/NZS 2293.3 compliant
- D32 Emergency Classification
- IP44 weatherproof
- LED lamps
- Lithium Iron Phosphate
- Microwave sensor options
- Large terminal block



ORDERING INFORMATION	EL	EL	240V	240V
Standard	ECLED-LI	ECLED-LI-MS	FCLLED	FCLLED-MS
Carton Quantity	5			
Weight - single (carton)	2.2kg (13kg)			
Dimensions (Diameter x H)	340mm x 100mm			

POWER, LAMPS AND BATTERY	EL	EL	240V	240V
Power Consumption (Standby / Max)	16W	16W	14W	15W
Lamp(s) (CCT / Life)	LED Module 4000K / 30,000hrs (L70 / B50)			
Nominal Lumen Output	1340lm	1340lm	1340lm	1340lm
Battery	Lithium Iron Phosphate		-	-
Voltage / Capacity (mAh)	3.2V / 3000mAh		-	-
Charging Method	Intelligent current limited constant voltage		-	-

TECHNICAL SPECIFICATIONS	EL	240V
Operating Mode	Maintained	Non-Emergency
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP)	IP44	


SPARE PARTS	EL
Battery	1560280

CLASSIFICATION	EL
C0	D32
C90	D32

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

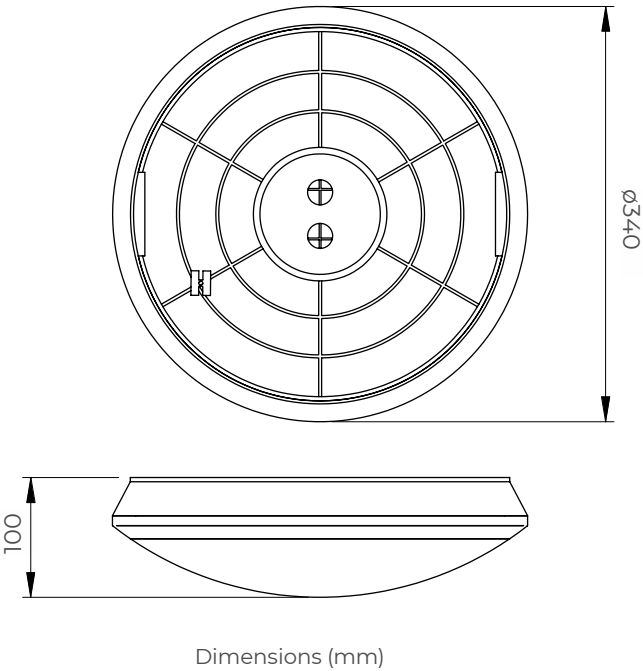

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

PREMIUM CIRCLITE



Premium LED Circular Emergency light



The Premium Circlite is an IP54 rated luminaire that is ideal for applications such as corridors, stairwells and walkways.

Constructed with a polycarbonate body and opal diffuser and with a large terminal block the Premium Circlite is also easy to install.

With an emergency classification of D25, LED technology and available with microwave sensor technology the Premium Circlite is a leader in this space.

Applications

- Office Buildings
- Car Parks
- Public Amenities
- Railway Stations
- Schools
- Sports Facilities



Features and Benefits

- AS/NZS 2293.3 compliant
- D25 Emergency Classification
- IP54 weatherproof
- LED lamps
- Lithium Iron Phosphate
- Microwave sensor options
- Large terminal block

LED

IP54

Surface Mount

D25

Sustained

LFP

PREMIUM CIRCLITE

ORDERING INFORMATION		LP		240V	
TEST OPTIONS - PART #	Standard	CCIRC	CCIRC-MS-HL	FCIRC	FCIRC-MS-HL
	DALI Driver	CCIRC-DD	-	FCIRC-DD	-
	Clevertest Plus System Compatible	Yes		-	-
	DALI	CCIRC-DALI	CCIRC-MS-HL-DALI	-	-
	Zoneworks® XT Hive	CCIRC-HV	CCIRC-MS-HL-HV	-	-
Carton Quantity		5			
Weight - single (carton)		1.8kg			
Dimensions (Diameter x H)		327mm x 100mm			

POWER, LAMPS AND BATTERY		LP		240V	
Power Consumption (Standby / Max)		1W / 16W	7W / 18W	12W	14W
Lamp(s) (CCT / Life)		LED 4,000K Natural White, 50,000hrs, Ra>80 (L70 / B50)			
Nominal Lumen Output		1300lm		1300lm	
Battery		Lithium Iron Phosphate		-	
Voltage / Capacity (mAh)		3.2V / 3000mAh		-	
Charging Method		Intelligent current limited constant voltage		-	


TECHNICAL SPECIFICATIONS		LP	240V
Operating Mode		Sustained	Non-Emergency
Construction - Body / Diffuser		Polycarbonate / Polycarbonate	
Voltage (V) (Frequency (Hz))		220-240V (50Hz)	
Operating Temperature		1°C to 40°C	
Ingress Protection Rating (IP)		IP54	

SPARE PARTS		LP	240V
Battery		1550010	-
LED Driver		1330041	1330041

CLASSIFICATION		LP
C0		D25
C90		D25

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

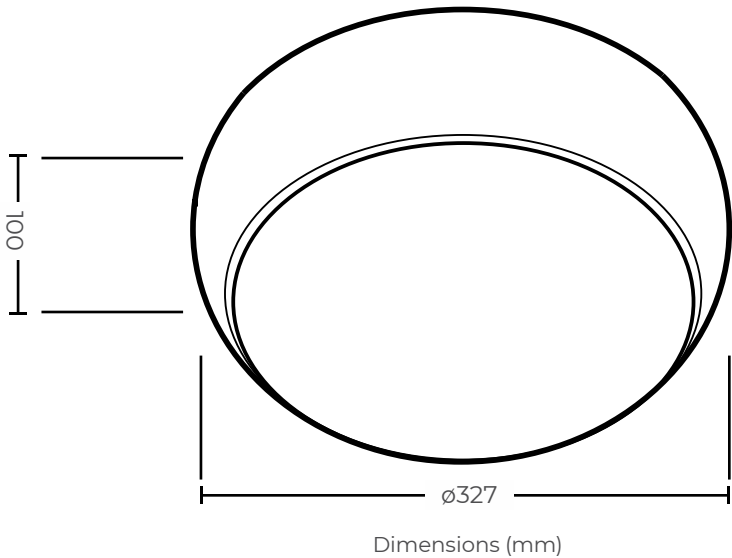

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



Robust & Weatherproof
LED Circular

The Bunkalite is a IP65 rated emergency luminaire that is ideal for outdoor covered applications such as corridors, stairwells and walkways in schools and apartment blocks.

Market leading lithium battery technology provides lower maintenance costs and LED lamps provide a low standby power rating that will reduce energy costs significantly.

Constructed with a powder coated steel body and white opal polycarbonate diffuser the Bunkalite provides a decorative solution for both industrial and commercial use.

Applications

- Apartments
- Factories
- Schools
- Car Parks
- Public Amenities
- Sports Facilities



Features and Benefits

- AS/NZS 2293.3 compliant
- IP65 Weatherproof
- IK10 Impact rating
- LED lamps
- Power coated steel body
- Available in Black, White, Grey and Silver
- Lithium Iron Phosphate battery
- Clevertest Plus System compatible
- Microwave sensor option

LED

D32

Surface Mount

IK10

Sustained

LFP

IP65

ORDERING INFORMATION		LP	240V
TEST OPTIONS / PART #	Standard - White	CBKLEDS-WHT	FBKLED-WHT
	Standard - Black	CBKLEDS-BLK	FBKLED-BLK
	Clevertest Plus System compatible	Yes	-
	DALI	CBKLEDS-DALI-WHT	-
	Zoneworks® XT Hive	CBKLEDS-HV-WHT	-
	Motion Sensor	Yes	Yes
Carton Quantity		1	
Weight - single (carton)		4.5kg	
Dimensions (D x H)		360mm x 145mm	

POWER, LAMPS AND BATTERY		LP	240V
Power Consumption (Standby / Max)		1.0W / 20.3W	16W
Lamp(s)		LED Module 4000K / 50,000hrs (L70 / E50 Ta40)	
Total Lumen Output		1945lm	1945lm
Battery		Lithium Iron Phosphate	-
Voltage / Capacity (mAh)		3.2V / 3200mAh	-
Charging Method		Intelligent Current Limited Constant Voltage	-


TECHNICAL SPECIFICATIONS	LP		240V
	Sustained		Non-Emergency
Operating Mode	Sustained		Non-Emergency
Voltage (V) (Frequency (Hz))	220-240V (50Hz)		
Operating Temperature	0°C to 40°C		
Ingress Protection Rating (IP)	IP65		
Impact Rating (IK)	IK10		

SPARE PARTS		LP
Battery	1550010	
DALI Node	8003060	
Zoneworks® XT Hive Node	8003194	

CLASSIFICATION		LP
C0	D32	
C90	D32	

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>
*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

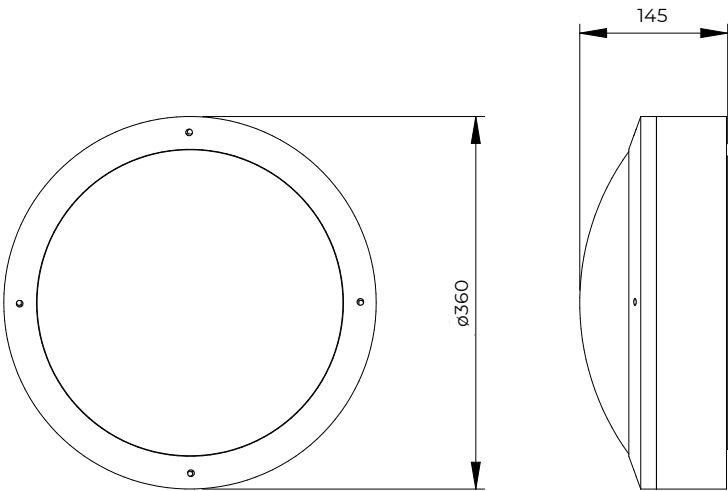

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



LED BATTENS

LED BATTENS

<i>Weatherproof (IP65, IP66)</i>		<i>Indoor, Diffused & Wireguard (IP20)</i>	
ARGO	119	EPIC Indoor	145
Argonaut Plus	125	Odyssey Diffused	150
Argonaut PRO	133	Odyssey Wireguard	154
Argonaut Vandal Resistant	140	Bare Emergency	158

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



Switchable Colour and Dual Output
Weatherproof Batten Range

The ARGO is the perfect all-rounder when it comes to projects requiring a reliable, weatherproof batten. With IP65 and IK08 impact ratings combined with switchable colour and output, the ARGO provides greater flexibility on each project.

The emergency version contains market-leading Lithium Iron Phosphate battery technology and testing options are available with the LP range. Packed with features at the right price and backed by Clevertronics reliability. You won't be let down by the ARGO.


Applications

-  Car Parks
-  Corridors
-  Stairwells
-  Back of House
-  Fire Stairs

 **EL**
LITHIUM IRON
PHOSPHATE
ECONOMY
LOWEST UP FRONT COST

 **LP**
LITHIUM IRON
PHOSPHATE
PREMIUM
PREMIUM PROJECT PERFORMANCE



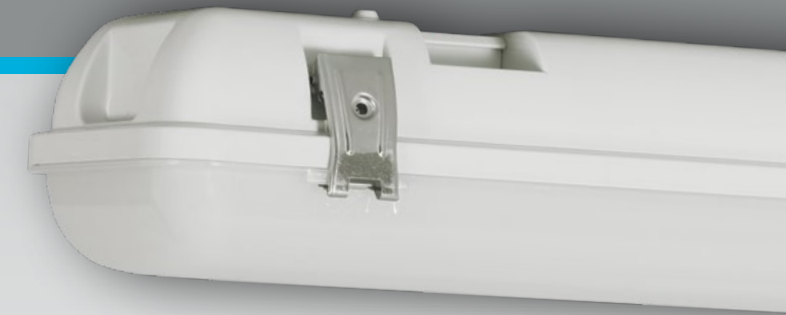

Features and Benefits

- AS/NZS 2293.3 compliant
- IP65
- Long life, energy efficient LED strip module
- Switchable Colour (3000K / 4000K / 5700K)
- Switchable Output (varies by model)
- Lithium (LiFePO4) Battery Technology
- Quick connect surface mount brackets and on-carton mounting template
- Large terminal block for easy installation
- IPART/VEU approval

 LED

 Switchable Colour

 Surface Mount

 Switchable Output

 Sustained

 50,000hrs

 LFP

 UV Stabilised Case

 IP65

 Large Terminal Blocks

 Quick Connect Brackets

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGO WEATHERPROOF 600MM
SWITCHABLE COLOUR

ARGO WEATHERPROOF 600MM
SWITCHABLE COLOUR

ORDERING INFORMATION		EMERGENCY (EL)	EMERGENCY (LP)	STANDARD
PART NUMBER	Nominal Size	600mm	600mm	600mm
	Standard	ARGO-600-EM	ARGO-600-LP	ARGO-600
	DALI Driver	No		
	Motion Sensors	ARGO-600-EM-SEN	ARGO-600-SEN-LP	ARGO-600-SEN
	CTP system compatible	No	Yes	-
	DALI*	-	ARGO-600-LP-DALI	-
	Zoneworks XT HIVE*	-	ARGO-600-LP-HV	-
	Carton Quantity	1		
Weight - single (carton)	1.5kg	1.5kg	1.25kg	
Dimensions (L X W X H)	655mm x 121mm x 88mm			

* For motion sensor version add -SEN to the product code as per following example: ARGO-600-SEN-LP-DALI

TECHNICAL SPECIFICATIONS			EMERGENCY (EL)	EMERGENCY (LP)	STANDARD
Construction - Base			UV Stabilised Polycarbonate		
Construction - Diffuser			UV Stabilised Polycarbonate		
Voltage (V) (Frequency (Hz))			220-240V(50Hz)		
Power Consumption (Standby / Max) ♦			(See table on next page)		
Lamp ♦			Dual LED Strip Module		
Lamp(s) (CCT / Life)			3000K, 4000K, 5700K / 50,000hrs (L70 / B50, Ra>80 Ta40c)		
Nominal Total Light Output ♦			(See table on next page)		
Ingress Protection Rating (IP)			IP65		
Impact Rating (IK)			IK08		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS			EMERGENCY (EL)	EMERGENCY (LP)
Operating Mode			Sustained	
Battery configuation			Integral	
Battery type			Lithium Iron Phosphate	
Voltage / mAh			3.2V / 3000mAh	
Charging Method			Intelligent Current Limited Constant Voltage	

CLASSIFICATIONS			EMERGENCY (EL)	EMERGENCY (LP)
C0			D40	D40
C90			D25	D25

SPARE PARTS			EMERGENCY (EL)	EMERGENCY (LP)
Battery			1560150	1550050
LED Strip			8002848	8002848

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

NO SENSOR


POWER CONSUMPTION	Standby Charge/ Main Lamp On		Standby Charge/ Main Lamp Off		Main Lamp On
	EL	LP	EL	LP	STANDARD
3000K	19W	19W	0.4W	0.4W	19W
4000K	18W	18W	0.4W	0.4W	18W
5700K	19W	19W	0.4W	0.4W	19W

LUMEN OUTPUT		
EL	LP	STANDARD
1950lm	1950lm	1950lm
2150lm	2150lm	2150lm
2040lm	2040lm	2040lm


SENSOR

POWER CONSUMPTION	Standby Charge/ Main Lamp On		Standby Charge/Main Lamp On @ Min. 10%		Standby Charge/ Main Lamp Off		Main Lamp On	Main Lamp On @ Min. 10%
	EL	LP	EL	LP	EL	LP	STANDARD	STANDARD
3000K	20W	20W	2W	2W	0.4W	0.4W	19W	2W
4000K	19W	19W	2W	2W	0.4W	0.4W	19W	2W
5700K	20W	20W	2W	2W	0.4W	0.4W	19W	2W

LUMEN OUTPUT		
EL	LP	STANDARD
1950lm	1950lm	1950lm
2150lm	2150lm	2150lm
2040lm	2040lm	2040lm

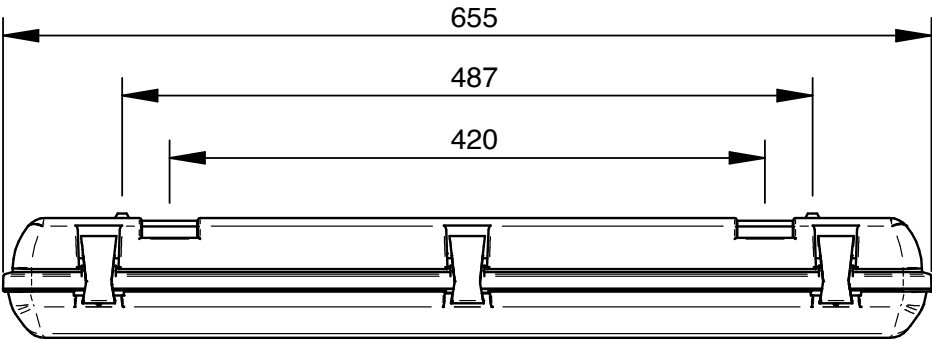

Dimension in (mm)

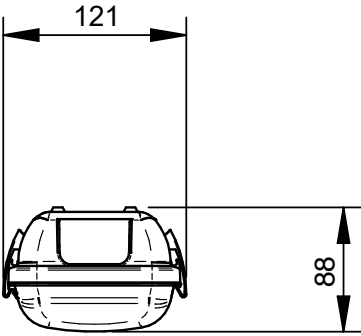

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGO WEATHERPROOF 1200MM

SWITCHABLE COLOUR & OUTPUT

ORDERING INFORMATION		EMERGENCY (EL)		EMERGENCY (LP)		STANDARD	
PART NUMBER	Nominal Size	1200mm		1200mm		1200mm	
	Standard	ARGO-1200-EM		ARGO-1200-LP		ARGO-1200	
	DALI Driver	No					
	Motion Sensors	ARGO-1200-EM-SEN		ARGO-1200-SEN-LP		ARGO-1200-SEN	
	CTP system compatible	No		Yes		-	
	DALI*	-		ARGO-1200-LP-DALI		-	
	Zoneworks XT HIVE*	-		ARGO-1200-LP-HV		-	
	Carton Quantity	1					
Weight - single (carton)	2.6kg		2.6kg		2.3kg		
Dimensions (L X W X H)	1265mm x 121mm x 88mm						

* For motion sensor version add -SEN to the product code as per following example: ARGO-1200-SEN-LP-DALI

TECHNICAL SPECIFICATIONS			EMERGENCY (EL)	EMERGENCY (LP)	STANDARD
Construction - Base			UV Stabilised Polycarbonate		
Construction - Diffuser			UV Stabilised Polycarbonate		
Voltage (V) (Frequency (Hz))			220-240V(50Hz)		
Power Consumption (Standby / Max) ♦			(See table on next page)		
Lamp ♦			Dual LED Strip Module		
Lamp(s) (CCT / Life)			3000K, 4000K, 5700K / 50,000hrs (L70 / B50, Ra>80 Ta40c)		
Nominal Total Light Output ♦			(See table on next page)		
Ingress Protection Rating (IP)			IP65		
Impact Rating (IK)			IK08		
Energy Approvals			IPART/VEU		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS			EMERGENCY (EL)	EMERGENCY (LP)
Operating Mode			Sustained	
Battery configuration			Integral	
Battery type			Lithium Iron Phosphate	
Voltage / mAh			3.2V / 3000mAh	
Charging Method			Intelligent Current Limited Constant Voltage	

CLASSIFICATIONS			EMERGENCY (EL)	EMERGENCY (LP)
C0			D40	D63
C90			D25	D40

SPARE PARTS			EMERGENCY (EL)	EMERGENCY (LP)
Battery			1560150	1550230
LED Strip			8002849	8002849

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

ARGO WEATHERPROOF 1200MM


SWITCHABLE COLOUR & OUTPUT

NO SENSOR						LUMEN OUTPUT		
POWER CONSUMPTION		Standby Charge/ Main Lamp On		Standby Charge/ Main Lamp Off		Main Lamp On		
OUTPUT 2		EL	LP	EL	LP	STANDARD		
3000K		38W	38W	0.4W	0.4W	38W		3820lm
4000K		36W	36W	0.4W	0.4W	35W		4320lm
5700K		38W	38W	0.4W	0.4W	38W		4100lm
OUTPUT 1								
3000K		20W	20W	0.4W	0.4W	20W		2260lm
4000K		19W	19W	0.4W	0.4W	19W		2430lm
5700K		20W	20W	0.4W	0.4W	20W		2400lm

SENSOR									LUMEN OUTPUT		
POWER CONSUMPTION	Standby Charge/ Main Lamp On		Standby Charge/Main Lamp On @ Min. 10%		Standby Charge/ Main Lamp Off		Main Lamp On	Main Lamp On @ Min. 10%			
	EL	LP	EL	LP	EL	LP	STANDARD	STANDARD	EL	LP	STANDARD
3000K	37W	39W	6W	3W	0.4W	0.4W	37W	6W	3670lm	3820lm	3670lm
4000K	36W	37W	6W	3W	0.4W	0.4W	35W	6W	4200lm	4320lm	4200lm
5700K	37W	39W	6W	3W	0.4W	0.4W	37W	6W	3970lm	4100lm	3970lm

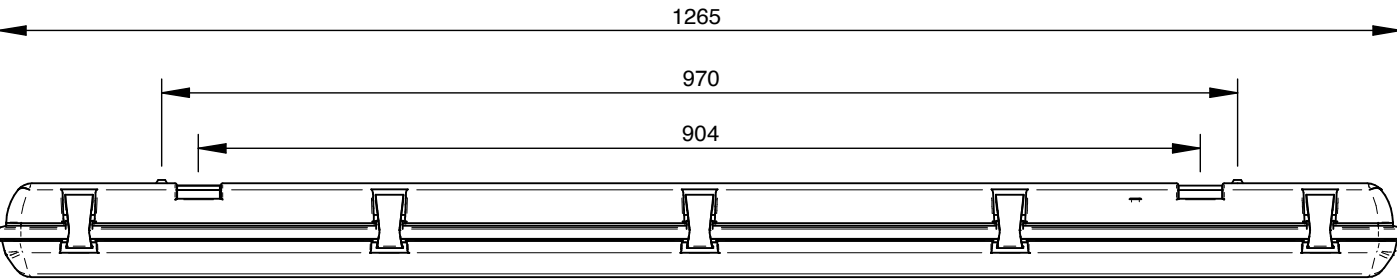

Dimension in (mm)



The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



ARGONAUT
PLUS +

High Spec & Efficiency,
Switchable Colour &
Dual Output



The all new Argonaut Plus range is designed for high spec applications requiring ultimate efficiency and longer LED lifetime. Featuring switchable colour and dual output, they adapt to your application requirements with the flick of a switch.

Backed by Clevertronics support, service and warranty, the batten range is available as a Standard or Emergency LP or L10 Nanophosphate with monitoring capabilities including Zoneworks XT HIVE, DALI and CTP.

Applications

- | | |
|---|---|
|  Car Parks |  Corridors |
|  Stairwells |  Back of House |
|  Fire Stairs | |


Emergency Range



*1200mm Standard Batten, varies by model.

Features and Benefits

- High efficiency @ 137 lm/W*
- Switchable Colour (3000K / 4000K / 5700K)
- Switchable Output (varies by model)
- IP65
- Long life, energy efficient LED strip module
- Large terminal block for easy installation
- Lithium Iron Phosphate or Nanophosphate battery
- Emergency POD for maximum in-service life and lowest maintenance cost
- Emergency integral battery option also available
- Up to D80 emergency classification
- AS/NZS 2293.3 compliant

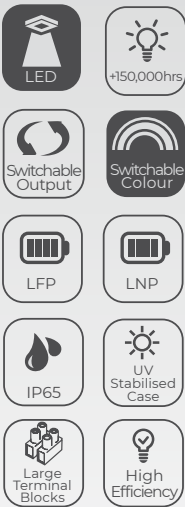

ARGONAUT PLUS WEATHERPROOF 600MM

HIGH SPEC & EFFICIENCY, SWITCHABLE COLOUR

PART NUMBER	ORDERING INFORMATION			
	EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
	Nominal Size	600mm ①	600mm ②	600mm ①
	Standard	ARGOPLUS-600-LP	ARGOPLUS-600-LPPOD	ARGOPLUS-600
	DALI Driver	ARGOPLUS-600-DD-LP	ARGOPLUS-600-DD-LPPOD	ARGOPLUS-600-DD
	Motion Sensors	ARGOPLUS-600-SEN-LP	ARGOPLUS-600-SEN-LPPOD	ARGOPLUS-600-SEN
	CTP System Compatible	Yes		-
	DALI*	ARGOPLUS-600-LP-DALI	ARGOPLUS-600-LPPOD-DALI	-
	Zoneworks XT Hive*	ARGOPLUS-600-LP-HV	ARGOPLUS-600-LPPOD-HV	-
	Carton Quantity	1		
Weight		1.7kg	2.0kg	1.4kg
Dimensions (L X W X H)		655mm x 160mm x 105mm	720mm x 160mm x 105mm	655mm x 160mm x 105mm

* For motion sensors add -SEN to the product code as per following example: ARGOPLUS-600-SEN-LP-DALI

TECHNICAL SPECIFICATIONS			
EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
Construction - Base		UV Stabilised Polycarbonate	
Construction - Diffuser		UV Stabilised Polycarbonate	
Voltage (V) (Frequency (Hz))		220-240V (50Hz)	
Lamp ♦		LED Strip Module	
Luminaire CCT		3000K, 4000K, 5700K Switchable	
Lamp Projected Life		Ra>80 Ta40°C; 157,000hrs (L70/B50), 95,000hrs (L80/B20), 43,000hrs (L90/B10)	
Power Consumption & Light Output		(See table on next page)	
Ingress Protection Rating (IP)		IP65	
Impact Rating (IK)		IK08	

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS			
EMERGENCY (LP)		EMERGENCY (L10)	
Operating Mode		Sustained	
Battery Configuration		Integral	POD
Battery Type		Lithium Iron Phosphate	
Voltage (V) / Capacity (mAh)		3.2V / 3200mAh	3.2V / 6400mAh
Charging Method		Intelligent Current Limited Constant Voltage	

CLASSIFICATIONS			
EMERGENCY (LP)		EMERGENCY (L10)	
C0	D40	D80	D80
C90	D25	D80	D80

SPARE PARTS			
EMERGENCY (LP)		EMERGENCY (L10)	
Battery	1550010	1550050	1530050
LED Strip	8002751	8002751	8002751

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)													
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

ARGONAUT PLUS WEATHERPROOF 600MM



HIGH SPEC & EFFICIENCY, SWITCHABLE COLOUR

NO SENSOR			
POWER CONSUMPTION	Standby Charge/ Main Lamp On		Main Lamp On
	OUTPUT 2 (700mA)		
	LP	L10	STANDARD
	3000K	18.4W	18.0W
4000K DEFAULT	17.8W	17.4W	
5700K	18.4W	18.0W	
LUMEN OUTPUT			
LP	L10	STANDARD	
2192 lm		2192 lm	
2351 lm		2351 lm	
2304 lm		2304 lm	
LUMENS / WATT			
LP	L10	STANDARD	
119 lm/W		122 lm/W	
132 lm/W		135 lm/W	
125 lm/W		128 lm/W	

SENSOR			
POWER CONSUMPTION	Standby Charge/ Main Lamp On		Main Lamp On
	OUTPUT 1 (700mA)		
	LP	L10	STANDARD
	3000K	19.0W	18.6W
4000K DEFAULT	18.3W	17.9W	
5700K	19.0W	18.6W	
Standby Charge / Main Lamp On @ Min 10%		Main Lamp On @ Min 10%	
LP	L10	STANDARD	
2.8W		2.4W	
2.9W		2.5W	
2.8W		2.4W	
LUMEN OUTPUT			
LP	L10	STANDARD	
2192 lm		2192 lm	
2351 lm		2351 lm	
2304 lm		2304 lm	
LUMENS / WATT			
LP	L10	STANDARD	
115 lm/W		118 lm/W	
129 lm/W		131 lm/W	
121 lm/W		124 lm/W	

Product Configuration:

- 1 600mm No Pod
- 2 600mm With Pod

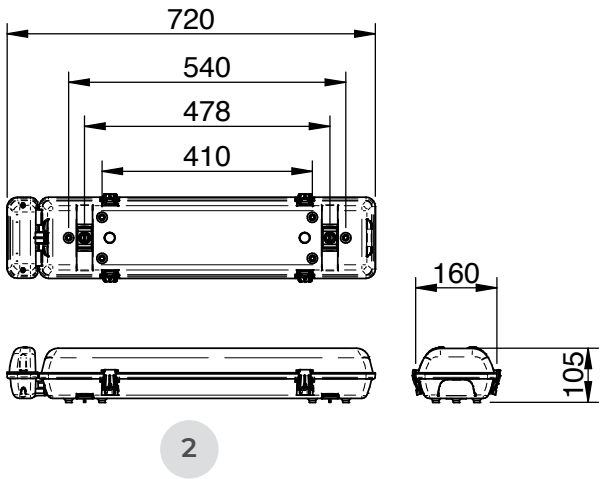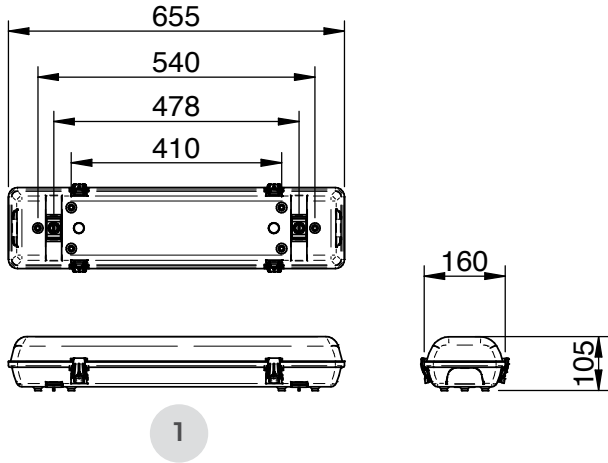

Dimensions in (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGONAUT PLUS WEATHERPROOF 1200MM

HIGH SPEC & EFFICIENCY, SWITCHABLE COLOUR & DUAL OUTPUT

PART NUMBER	ORDERING INFORMATION		EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
	Nominal Size	1200mm ①	1200mm ②	1200mm ③	1200mm ④	1200mm ⑤
	Standard	ARGOPLUS-1200-LP	ARGOPLUS-1200-LPPOD	ARGOPLUS-1200-L10POD	ARGOPLUS-1200	
	DALI Driver	ARGOPLUS-1200-DD-LP	ARGOPLUS-1200-DD-LPPOD	ARGOPLUS-1200-DD-L10POD	ARGOPLUS-1200-DD	
	Motion Sensors	ARGOPLUS-1200-SEN-LP	ARGOPLUS-1200-SEN-LPPOD	ARGOPLUS-1200-SEN-L10POD	ARGOPLUS-1200-SEN	
	CTP System Compatible	Yes				-
	DALI*	ARGOPLUS-1200-LP-DALI	ARGOPLUS-1200-LPPOD-DALI	ARGOPLUS-1200-L10POD-DALI	-	
	Zoneworks XT Hive*	ARGOPLUS-1200-LP-HV	ARGOPLUS-1200-LPPOD-HV	ARGOPLUS-1200-L10POD-HV	-	
	Carton Quantity	1				
	Weight	2.9kg	3.2kg	3.2kg	2.7kg	
	Dimensions (L X W X H)	1265mm x 160mm x 105mm	1330mm x 160mm x 105mm	1330mm x 160mm x 105mm	1265mm x 160mm x 105mm	

* For motion sensors add -SEN to the product code as per following example: ARGOPLUS-1200-SEN-LP-DALI

TECHNICAL SPECIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)	STANDARD
Construction - Base	UV Stabilised Polycarbonate			
Construction - Diffuser	UV Stabilised Polycarbonate			
Voltage (V) (Frequency (Hz))	220-240V (50Hz)			
Lamp ♦	LED Strip Module			
Luminaire CCT	3000K, 4000K, 5700K Switchable			
Lamp Projected Life	Ra>80 Ta40°c; 157,000hrs (L70/B50), 95,000hrs (L80/B20), 43,000hrs (L90/B10)			
Power Consumption & Light Output	(See table on next page)			
Ingress Protection Rating (IP)	IP65			
Impact Rating (IK)	IK08			

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)
Operating Mode	Sustained		
Battery Configuration	Integral	POD	POD
Battery Type	Lithium Iron Phosphate		Lithium Nanophosphate
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh		3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage		

CLASSIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)
C0	D63	D80	D80
C90	D40	D80	D80

SPARE PARTS		EMERGENCY (LP)	EMERGENCY (L10)
Battery	1550230	1550050	1530050
LED Strip	8002752	8002752	8002752

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

ARGONAUT PLUS WEATHERPROOF 1200MM



HIGH SPEC & EFFICIENCY, SWITCHABLE COLOUR & DUAL OUTPUT

NO SENSOR									
POWER CONSUMPTION	Standby Charge/ Main Lamp On	Main Lamp On	LUMEN OUTPUT			LUMENS / WATT			
OUTPUT 2 (650mA)	LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD
3000K	33.7W	33.3W		4145 lm	4145 lm		123 lm/W	125 lm/W	
4000K DEFAULT	32.6W	32.2W		4420 lm	4420 lm		136 lm/W	137 lm/W	
5700K	33.6W	33.2W		4322 lm	4322 lm		129 lm/W	130 lm/W	
OUTPUT 1 (350mA)									
3000K	19.2W	18.8W		2432 lm	2432 lm		127 lm/W	129 lm/W	
4000K	18.8W	18.4W		2549 lm	2549 lm		136 lm/W	139 lm/W	
5700K	19.1W	18.7W		2533 lm	2533 lm		133 lm/W	136 lm/W	

SENSOR																
POWER CONSUMPTION			Standby Charge/ Main Lamp On		Main Lamp On		Standby Charge / Main Lamp On @ Min 10%			Main Lamp On @ Min 10%		LUMEN OUTPUT		LUMENS / WATT		
OUTPUT (650mA)		LP	L10	STANDARD		LP	L10	STANDARD		LP	L10	STAN-DARD	LP	L10	STAN-DARD	
3000K		34.3W		33.9W		7.5W		4.8W		4145 lm		4145 lm	121 lm/W		122 lm/W	
4000K DEFAULT		33.2W		32.8W		4.9W		4.5W		4420 lm		4420 lm	133 lm/W		135 lm/W	
5700K		34.1W		33.7W		5.1W		4.7W		4322 lm		4322 lm	127 lm/W		128 lm/W	

Product Configuration:

- 1 1200mm No Pod
- 2 1200mm With Pod

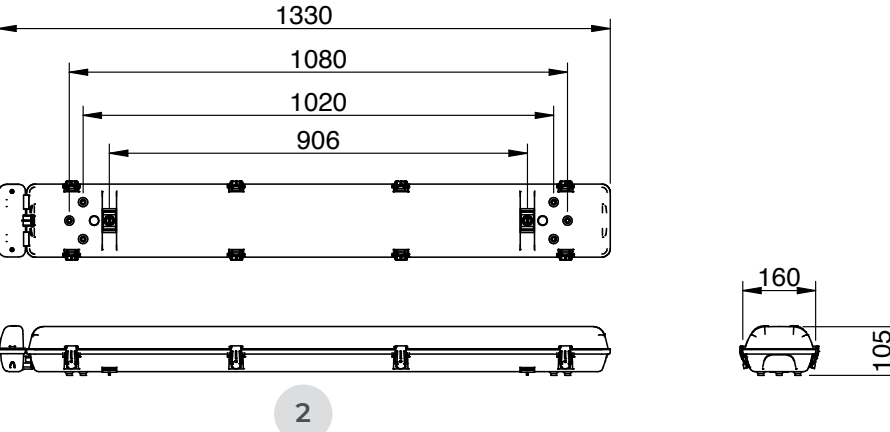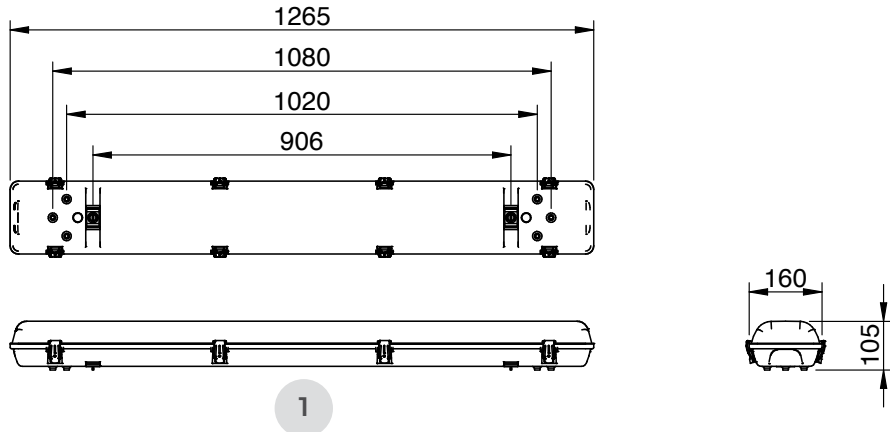

Dimensions in (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGONAUT PLUS WEATHERPROOF 1500MM

HIGH SPEC & EFFICIENCY, SWITCHABLE COLOUR

PART NUMBER	ORDERING INFORMATION			
	EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
	Nominal Size	1500mm ①	1500mm ②	1500mm ①
	Standard	ARGOPLUS-1500-LP	ARGOPLUS-1500-LPPOD	ARGOPLUS-1500-L10POD
	DALI Driver	ARGOPLUS-1500-DD-LP	ARGOPLUS-1500-DD-LPPOD	ARGOPLUS-1500-DD-L10POD
	Motion Sensors	ARGOPLUS-1500-SEN-LP	ARGOPLUS-1500-SEN-LPPOD	ARGOPLUS-1500-SEN-L10POD
	CTP System Compatible	Yes		-
	DALI*	ARGOPLUS-1500-LP-DALI	ARGOPLUS-1500-LPPOD-DALI	ARGOPLUS-1500-L10POD-DALI
	Zoneworks XT Hive*	ARGOPLUS-1500-LP-HV	ARGOPLUS-1500-LPPOD-HV	ARGOPLUS-1500-L10POD-HV
	Carton Quantity	1		
Weight		3.6kg	3.9kg	3.3kg
Dimensions (L X W X H)		1565mm x 160mm x 105mm	1630mm x 160mm x 105mm	1630mm x 160mm x 105mm

* For motion sensors add -SEN to the product code as per following example: ARGOPLUS-1500-SEN-LP-DALI

TECHNICAL SPECIFICATIONS			
EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
Construction - Base	UV Stabilised Polycarbonate		
Construction - Diffuser	UV Stabilised Polycarbonate		
Voltage (V) (Frequency (Hz))	220-240V (50Hz)		
Lamp ♦	LED Strip Module		
Luminaire CCT	3000K, 4000K, 5700K Switchable		
Lamp Projected Life	Ra>80 Ta40°C; 157,000hrs (L70/B50), 95,000hrs (L80/B20), 43,000hrs (L90/B10)		
Power Consumption & Light Output	(See table on next page)		
Ingress Protection Rating (IP)	IP65		
Impact Rating (IK)	IK08		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EMERGENCY (LP)		EMERGENCY (L10)
Operating Mode	Sustained		
Battery Configuration	Integral	POD	POD
Battery Type	Lithium Iron Phosphate		Lithium Nanophosphate
Voltage (V) / Capacity (mAh)	3.2V/6400mAh		3.3V/5000mAh
Charging Method	Intelligent Current Limited Constant Voltage		

CLASSIFICATIONS			
EMERGENCY (LP)		EMERGENCY (L10)	
C0	D63	D80	D80
C90	D40	D80	D80

SPARE PARTS			
EMERGENCY (LP)		EMERGENCY (L10)	
Battery	1550230	1550050	1530050
LED Strip	8002753	8002753	8002753

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

ARGONAUT PLUS WEATHERPROOF 1500MM

HIGH SPEC & EFFICIENCY, SWITCHABLE COLOUR

NO SENSOR


POWER CONSUMPTION	Standby Charge/ Main Lamp On		Main Lamp On	LUMEN OUTPUT			LUMENS / WATT				
	OUTPUT 2 (950mA)	LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD	
3000K		49.3W		48.9W		5877 lm		5877 lm		119 lm/W	120 lm/W
4000K DEFAULT		47.5W		47.1W		6337 lm		6337 lm		133 lm/W	135 lm/W
5700K		49.2W		48.8W		6185 lm		6185 lm		126 lm/W	127 lm/W

SENSOR

POWER CONSUMPTION	Standby Charge/ Main Lamp On		Main Lamp On	Standby Charge/ Main Lamp On @ Min 10%		Main Lamp On @ Min 10%	LUMEN OUTPUT			LUMENS / WATT				
	OUTPUT 1 (950mA)	LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD	
3000K		48.3W		47.9 W		7.1W		6.7W		5877 lm		5877 lm	122 lm/W	123 lm/W
4000K DEFAULT		46.7W		46.3W		7.0W		6.6W		6337 lm		6337 lm	136 lm/W	137 lm/W
5700K		48.1W		47.7W		7.1W		6.7W		6185 lm		6185 lm	129 lm/W	130 lm/W

Product Configuration:

- 1 1500mm No Pod
- 2 1500mm With Pod

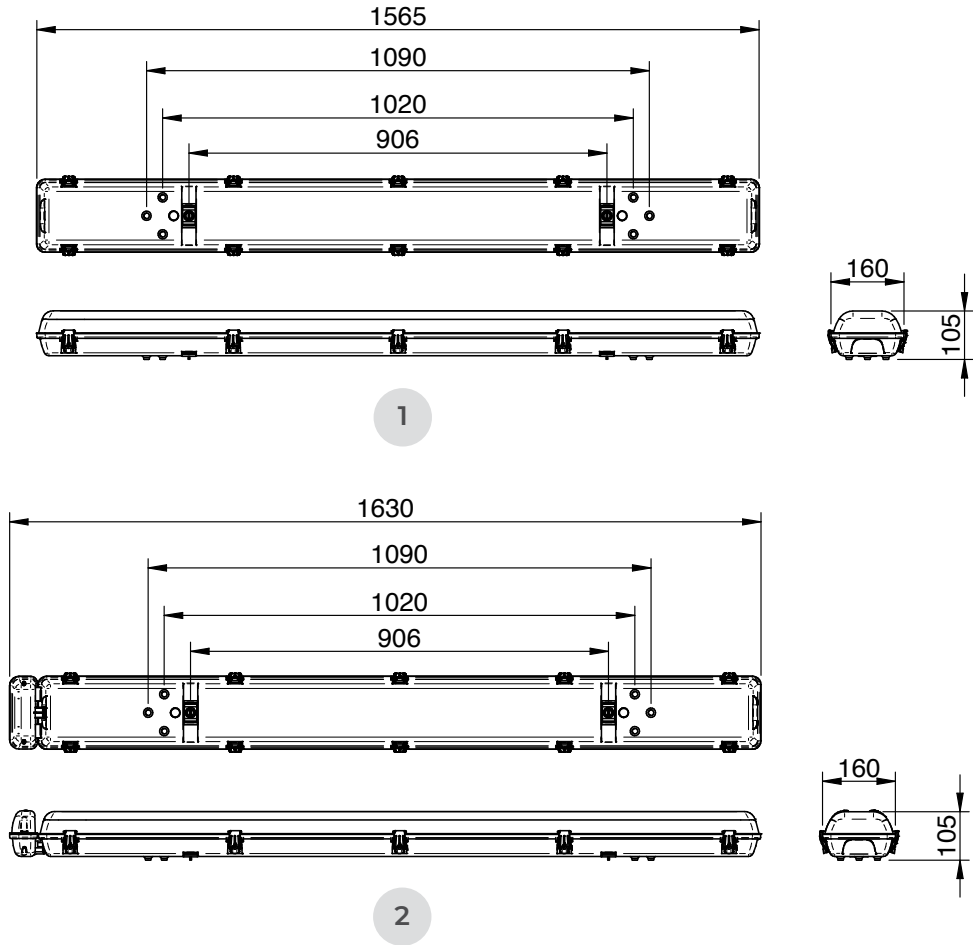

Dimensions in (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



Ultimate Spec & Efficiency,
Configurable Quad Output*

The all new Argonaut Pro range is designed to maximise LED efficiency with the highest product performance and LED lifetime. Featuring configurable quad output, they maximise efficiency by delivering up to 152lm

Backed by Clevertronics support, service and warranty, the batten range is available as a Standard or Emergency LP or L10 Nanophosphate with monitoring capabilities including Zoneworks XT HIVE, DALI and CTP.

Applications

- Car Parks
- Stairwells
- Fire Stairs
- Corridors
- Back of House


Emergency Range



*1200mm Standard Batten, varies by model.

Features and Benefits

- Ultimate efficiency @ 152 lm/W*
- Configurable Quad Output (varies by model)
- IP65
- Long life, energy efficient LED strip module
- Large terminal block for easy installation
- Lithium Iron Phosphate or Nanophosphate battery
- Emergency POD for maximum in-service life and lowest maintenance cost
- Emergency integral battery option also available
- Up to D80 emergency classification
- AS/NZS 2293.3 compliant

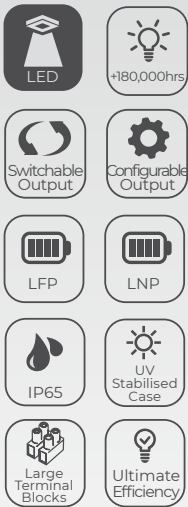

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGONAUT PRO WEATHERPROOF 600MM

ULTIMATE SPEC & EFFICIENCY

PART NUMBER	ORDERING INFORMATION		EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
	Nominal Size		600mm ①	600mm ②	600mm ②	600mm ①
	Standard		ARGOPRO-600-LP	ARGOPRO-600-LPPOD	ARGOPRO-600-L10POD	ARGOPRO-600
	DALI Driver		ARGOPRO-600-DD-LP	ARGOPRO-600-DD-LPPOD	ARGOPRO-600-DD-L10POD	ARGOPRO-600-DD
	Motion Sensors		ARGOPRO-600-SEN-LP	ARGOPRO-600-SEN-LPPOD	ARGOPRO-600-SEN-L10POD	ARGOPRO-600-SEN
	CTP System Compatible		Yes			-
	DALI*		ARGOPRO-600-LP-DALI	ARGOPRO-600-LPPOD-DALI	ARGOPRO-600-L10POD-DALI	-
	Zoneworks XT HIVE*		ARGOPRO-600-LP-HV	ARGOPRO-600-LPPOD-HV	ARGOPRO-600-L10POD-HV	-
Carton Quantity			1			
Weight			1.7kg	2.0kg	2.0kg	1.4kg
Dimensions (L X W X H)			655mm x 160mm x 105mm	720mm x 160mm x 105mm	720mm x 160mm x 105mm	655mm x 160mm x 105mm

* For motion sensors add -SEN to the product code as per following example: ARGOPRO-600-SEN-LP-DALI

TECHNICAL SPECIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)	STANDARD
Construction - Base		UV Stabilised Polycarbonate		
Construction - Diffuser		UV Stabilised Polycarbonate		
Voltage (V) (Frequency (Hz))		220-240V (50Hz)		
Lamp ♦		LED Strip Module		
Luminaire CCT		4000K		
Lamp Projected Life		Ra>80 Ta40°C; 184,000hrs (L70/B50), 100,000hrs (L80/B20), 43,000hrs (L90/B10)		
Power Consumption & Light Output		(See table on next page)		
Ingress Protection Rating (IP)		IP65		
Impact Rating (IK)		IK08		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EMERGENCY (LP)		EMERGENCY (L10)
Operating Mode		Sustained		
Battery Configuration		Integral	POD	POD
Battery Type		Lithium Iron Phosphate		Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh		3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage		

CLASSIFICATIONS		EMERGENCY (LP)		EMERGENCY (L10)
C0		D63	D80	D80
C90		D40	D80	D80

SPARE PARTS		EMERGENCY (LP)		EMERGENCY (L10)
Battery		1550230	1550050	1530050
LED Strip		8002754	8002754	8002754

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>



ARGONAUT PRO WEATHERPROOF 600MM

ULTIMATE SPEC & EFFICIENCY

NO SENSOR			LUMEN OUTPUT			LUMENS / WATT		
POWER CONSUMPTION	Standby Charge/ Main Lamp On		Main Lamp On					
	LP	L10	STANDARD			LP	L10	STANDARD
Output (700mA)	18.7W		18.3W			2564 lm		2564 lm
						137 lm/W		140 lm/W

SENSOR			LUMEN OUTPUT			LUMENS / WATT		
POWER CONSUMPTION	Standby Charge/ Main Lamp On		Main Lamp On					
	LP	L10	STANDARD			LP	L10	STANDARD
Output (700mA)	18.4W		18.0W			2.9W		2.5W
						2564 lm		2564 lm
						139 lm/W		142 lm/W

- Product Configuration:
- 1 600mm No Pod
 - 2 600mm With Pod

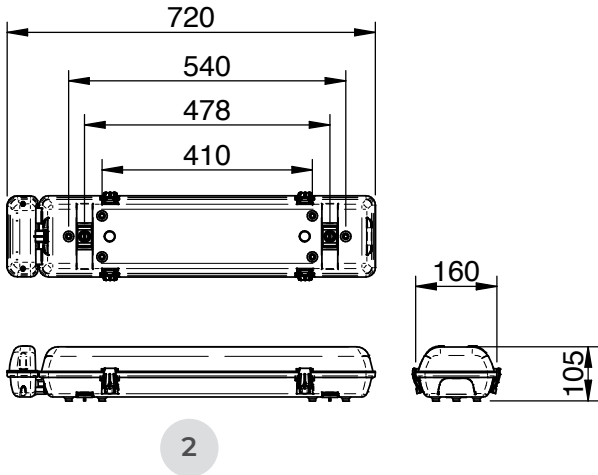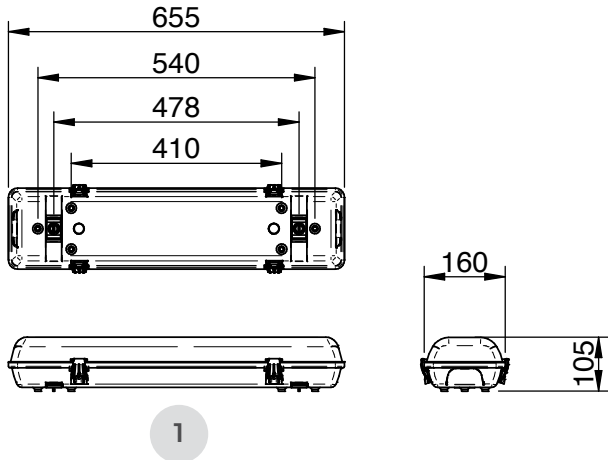

Dimensions in (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGONAUT PRO WEATHERPROOF 1200MM

ULTIMATE SPEC & EFFICIENCY, CONFIGURABLE QUAD OUTPUT

PART NUMBER	ORDERING INFORMATION		EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
	Nominal Size	1200mm ①	1200mm ②	1200mm ③	1200mm ④	
	Standard	ARGOPRO-1200-LP	ARGOPRO-1200-LPPOD	ARGOPRO-1200-L10POD	ARGOPRO-1200	
	DALI Driver	ARGOPRO-1200-DD-LP	ARGOPRO-1200-DD-LPPOD	ARGOPRO-1200-DD-L10POD	ARGOPRO-1200-DD	
	Motion Sensors	ARGOPRO-1200-SEN-LP	ARGOPRO-1200-SEN-LPPOD	ARGOPRO-1200-SEN-L10POD	ARGOPRO-1200-SEN	
	CTP System Compatible	Yes				-
	DALI*	ARGOPRO-1200-LP-DALI	ARGOPRO-1200-LPPOD-DALI	ARGOPRO-1200-L10POD-DALI		-
	Zoneworks XT HIVE*	ARGOPRO-1200-LP-HV	ARGOPRO-1200-LPPOD-HV	ARGOPRO-1200-L10POD-HV		-
Carton Quantity		1				
Weight		2.9kg	3.2kg	3.2kg	2.7kg	
Dimensions (L X W X H)		1265mm x 160mm x 105mm	1330mm x 160mm x 105mm	1330mm x 160mm x 105mm	1265mm x 160mm x 105mm	

* For motion sensors add -SEN to the product code as per following example: ARGOPRO-1200-SEN-LP-DALI

TECHNICAL SPECIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)	STANDARD
Construction - Base	UV Stabilised Polycarbonate			
Construction - Diffuser	UV Stabilised Polycarbonate			
Voltage (V) (Frequency (Hz))	220-240V (50Hz)			
Lamp ♦	LED Strip Module			
Luminaire CCT	4000K			
Lamp Projected Life	Ra>80 Ta40°C;184,000hrs (L70/B50), 100,000hrs (L80/B20), 43,000hrs (L90/B10)			
Power Consumption & Light Output	(See table on next page)			
Ingress Protection Rating (IP)	IP65			
Impact Rating (IK)	IK08			

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)
Operating Mode	Sustained		
Battery Configuration	Integral	POD	POD
Battery Type	Lithium Iron Phosphate		Lithium Nanophosphate
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh		3.3V / 5000mAh
Charging Method	Intelligent Current Limited Constant Voltage		

CLASSIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)
C0	D63	D80	D80
C90	D40	D80	D80

SPARE PARTS		EMERGENCY (LP)	EMERGENCY (L10)
Battery	1550230	1550050	1530050
LED Strip	8002755	8002755	8002755

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9

■ Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

ARGONAUT PRO WEATHERPROOF 1200MM



ULTIMATE SPEC & EFFICIENCY, CONFIGURABLE QUAD OUTPUT

NO SENSOR		POWER CONSUMPTION		LUMEN OUTPUT		LUMENS / WATT	
		Standby Charge/ Main Lamp On		Main Lamp On			
OUTPUT		LP	L10	STANDARD	LP	L10	STANDARD
Output 4 (900mA)		42.5W		42.1W	6259 lm		6259 lm
Output 3 (750mA)		37.0W		36.6W	5495 lm		5495 lm
Output 2 (650mA) DEFAULT		31.1W		30.7W	4660 lm		4660 lm
Output 1 (500mA)		24.0W		23.6W	3541 lm		3541 lm

SENSOR		POWER CONSUMPTION		LUMEN OUTPUT		LUMENS / WATT	
		Standby Charge/ Main Lamp On		Main Lamp On Main Lamp On @ Min 10%			
OUTPUT		LP	L10	STANDARD	LP	L10	STANDARD
Output 4 (900mA)		43.1W		42.7W	5.7W	5.3W	6259 lm
Output 3 (750mA)		36.7W		36.3W	5.1W	4.7W	5495 lm
Output 2 (650mA) DEFAULT		31.3W		30.9W	4.4W	4.0W	4660 lm
Output 1 (500mA)		24.5W		24.1W	3.6W	3.2W	3541 lm

Product Configuration:

- 1 1200mm No Pod
- 2 1200mm With Pod

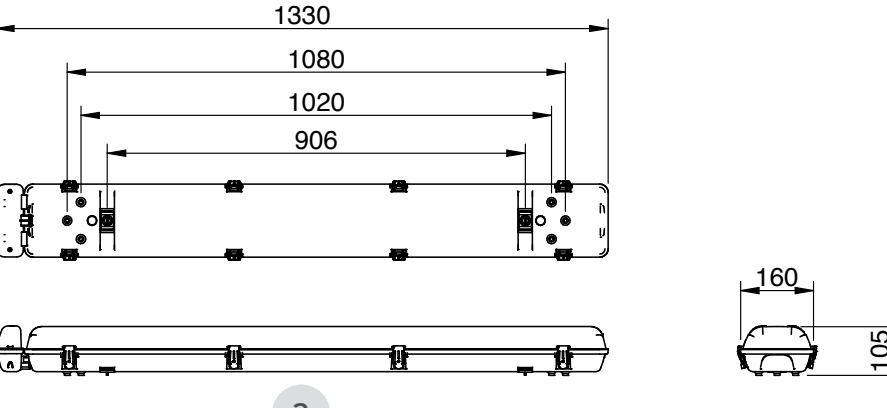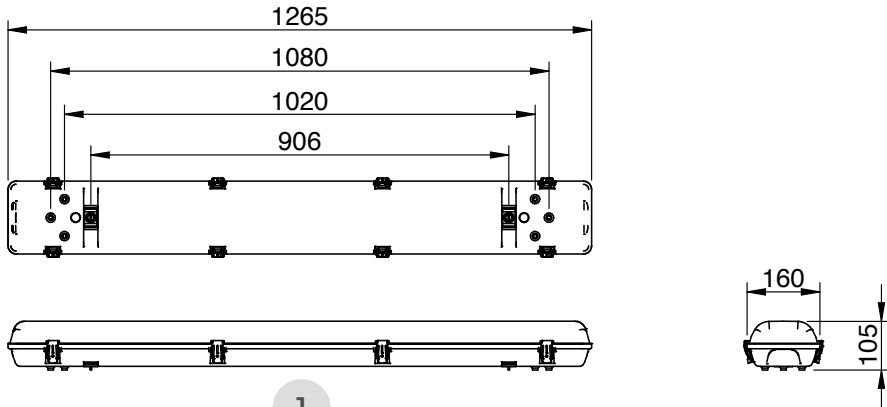

Dimensions in (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGONAUT PRO WEATHERPROOF 1500MM

ULTIMATE SPEC & EFFICIENCY, SWITCHABLE DUAL OUTPUT

PART NUMBER	ORDERING INFORMATION		EMERGENCY (LP)		EMERGENCY (L10)	STANDARD
	Nominal Size		1500mm ①	1500mm ②	1500mm ②	1500mm ①
	Standard		ARGOPRO-1500-LP	ARGOPRO-1500-LPPOD	ARGOPRO-1500-L10POD	ARGOPRO-1500
	DALI Driver		ARGOPRO-1500-DD-LP	ARGOPRO-1500-DD-LPPOD	ARGOPRO-1500-DD-L10POD	ARGOPRO-1500-DD
	Motion Sensors		ARGOPRO-1500-SEN-LP	ARGOPRO-1500-SEN-LPPOD	ARGOPRO-1500-SEN-L10POD	ARGOPRO-1500-SEN
	CTP System Compatible		Yes			-
	DALI*		ARGOPRO-1500-LP-DALI	ARGOPRO-1500-LPPOD-DALI	ARGOPRO-1500-L10POD-DALI	-
	Zoneworks XT HIVE*		ARGOPRO-1500-LP-HV	ARGOPRO-1500-LPPOD-HV	ARGOPRO-1500-L10POD-HV	-
	Carton Quantity		1			
	Weight		3.6kg	3.9kg	3.9kg	3.3kg
	Dimensions (L X W X H)		1565mm x 160mm x 105mm	1630mm x 160mm x 105mm	1630mm x 160mm x 105mm	1565mm x 160mm x 105mm

* For motion sensors add -SEN to the product code as per following example: ARGOPRO-1500-SEN-LP-DALI

TECHNICAL SPECIFICATIONS		EMERGENCY (LP)	EMERGENCY (L10)	STANDARD
Construction - Base		UV Stabilised Polycarbonate		
Construction - Diffuser		UV Stabilised Polycarbonate		
Voltage (V) (Frequency (Hz))		220-240V (50Hz)		
Lamp ♦		LED Strip Module		
Luminaire CCT		4000K		
Lamp Projected Life		Ra>80 Ta40°C; 184,000hrs (L70/B50), 100,000hrs (L80/B20), 43,000hrs (L90/B10)		
Power Consumption & Light Output		(See table on next page)		
Ingress Protection Rating (IP)		IP65		
Impact Rating (IK)		IK08		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EMERGENCY (LP)		EMERGENCY (L10)
Operating Mode		Sustained		
Battery Configuration		Integral	POD	POD
Battery Type		Lithium Iron Phosphate		Lithium Nanophosphate
Voltage (V) / Capacity (mAh)		3.2V / 6400mAh		3.3V / 5000mAh
Charging Method		Intelligent Current Limited Constant Voltage		

CLASSIFICATIONS		EMERGENCY (LP)		EMERGENCY (L10)
C0		D63	D80	D80
C90		D40	D80	D80

SPARE PARTS		EMERGENCY (LP)		EMERGENCY (L10)
Battery		1550230	1550050	1530050
LED Strip		8002756	8002756	8002756

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

ARGONAUT PRO WEATHERPROOF 1500MM


ULTIMATE SPEC & EFFICIENCY, SWITCHABLE DUAL OUTPUT

NO SENSOR											
POWER CONSUMPTION		Standby Charge/ Main Lamp On		Main Lamp On		LUMEN OUTPUT			LUMENS / WATT		
		LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD	
Output 2 (1200mA) DEFAULT		59.1W		58.1W	8498 lm		8498 lm	144 lm/W		146 lm/W	
Output 1 (900mA)		44.1W		42.8W	6385 lm		6385 lm	145 lm/W		149 lm/W	

SENSOR													
POWER CONSUMPTION		Standby Charge/ Main Lamp On		Main Lamp On	Standby Charge / Main Lamp On @ Min 10%		Main Lamp On @ Min 10%	LUMEN OUTPUT			LUMENS / WATT		
OUTPUT	LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD	LP	L10	STANDARD	
Output 2 (1200mA) DEFAULT	58.5W		58.1W	9.7W		7.0W	8498 lm		8498 lm	145 lm/W		146 lm/W	
Output 1 (900mA)	43.1W		42.7W	8.0W		5.3W	6385 lm		6385 lm	148 lm/W		150 lm/W	

Product Configuration:

- 1 1500mm No Pod
- 2 1500mm With Pod

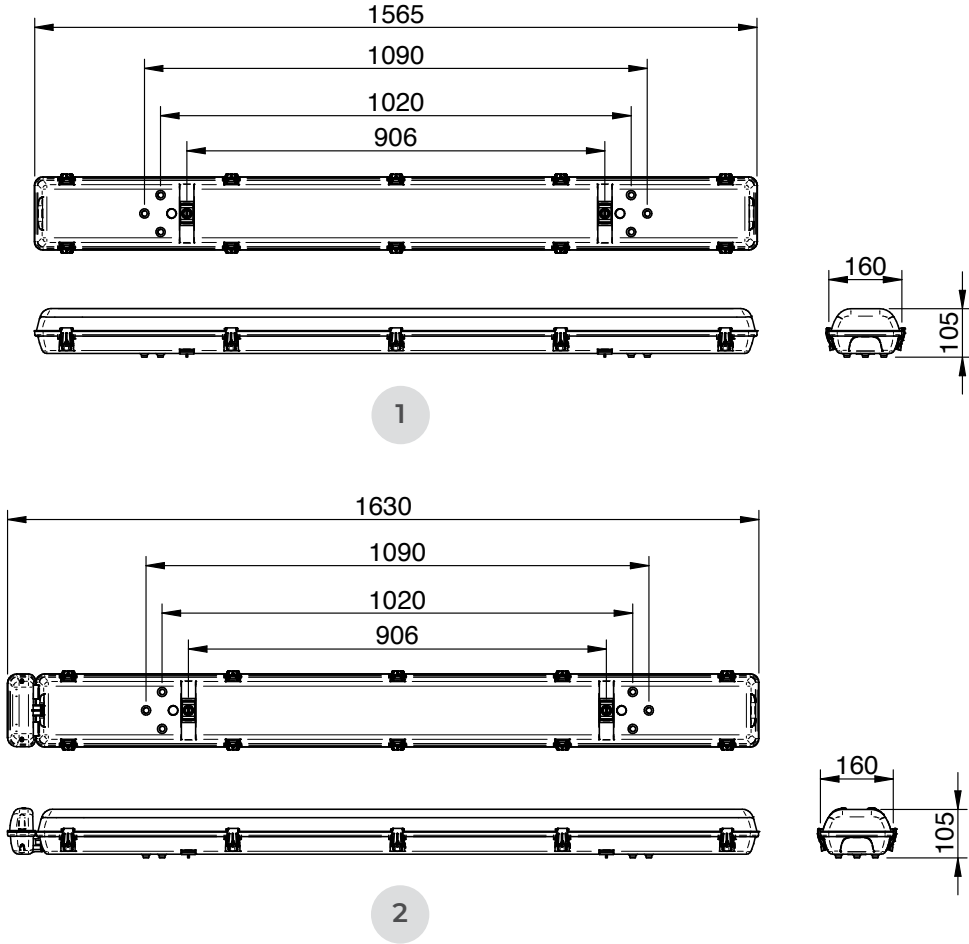

Dimensions in (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.


ARGONAUT VANDAL RESISTANT



High Level Impact Protection

The Argonaut Vandal batten range provides a wide selection of emergency battens for vandal resistant applications where higher level of impact protection is required.

Available in L10 Nanophosphate® with all emergency test options including Zoneworks® XT HIVE, DALI and CTP System.

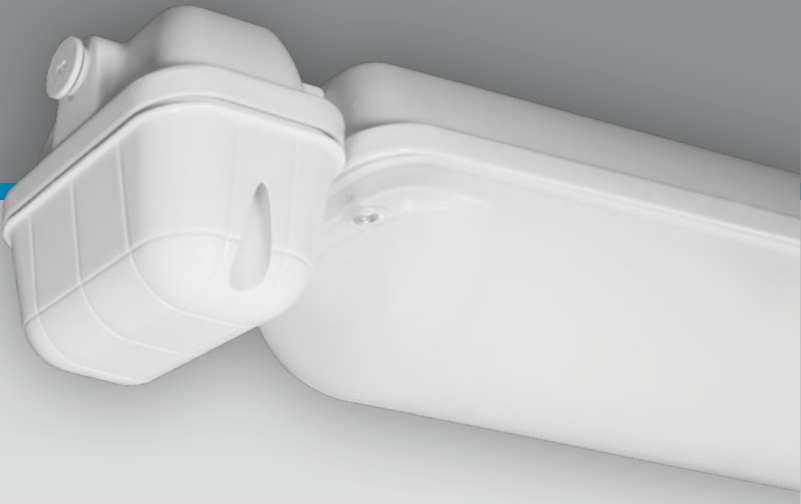

Features and Benefits

- AS/NZS 2293.3 compliant
- LED Lamps
- Lithium Nanophosphate® Battery
- IK10
- IP66
- Die cast low copper aluminium body
- Zoneworks® XT HIVE or DALI test options
- Clevertest Plus System compatible



Applications

- 

Public Amenities
- 

Schools
- 

Stadiums
- 

Railway Stations
- 

Car Parks
- 

Correction Facilities



ARGONAUT VANDAL RESISTANT 600MM

ORDERING INFORMATION		L10	240V
TEST OPTIONS - PART NO.	Nominal Size	600mm	600mm
	Standard	LVP2LEDM-P	FVP2LED-P
	DALI Driver	LVP2LEDM-P-DD	FVP2LED-P-DD
	CTP system compatible	Yes	-
	Motion sensors	Yes (On/Off)	
	DALI	LVP2LEDM-P-DALI	-
	Zoneworks® XT HIVE	LVP2LEDM-P-HV	-
Carton Quantity		4	
Weight - single (carton)		3.2kg	2.4kg
Dimensions (L x W x H)		790mm x 140mm x 120mm	700mm x 140mm x 120mm

For Motion sensor version add -MS to the product code as per the following example, CWB2LEDS-P-MS

TECHNICAL SPECIFICATIONS	L10	240V
Construction - Base	Pressure die-cast, low copper aluminium alloy body with powder coat paint finish	
Construction - Diffuser	Opal Impact Resistant Polycarbonate with Secure Access Screws (LSZH)	
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	
Power Consumption ♦ (Standby / Max)	1.1W / 27W	22W
Nominal Total Light Output ♦	2500lm	
Lamp	LED Strip module	
Lamp CCT & Life ♦	4000K, 100,000 hrs (L80,B20, Ra>80, Ta40c)	
Operating Temperature	0°C to 40°C	
Ingress Protection Rating (IP)	IP66	
IK Rating	IK10	

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	L10	240V
Operating Mode	Maintained	-
Battery configuration	Pod	-
Battery type	Lithium Nanophosphate®	-
Voltage / Capacity (mAh)	6.6V / 2500mAh	-
Charging Method	Intelligent Current Limited Constant Voltage	

CLASSIFICATION	L10	240V
C0	D63	-
C90	D32	-

SPARE PARTS	L10	240V
Battery	1530260	-
LED Strip	8002699	8002699

ARGONAUT VANDAL RESISTANT 1200MM

ORDERING INFORMATION		L10	240V
TEST OPTIONS PART NO.	Nominal Size	1200mm	1200mm
	Standard	LVP4LED-M-P	FVP4LED-P
	DALI Driver	LVP4LED-M-P-DD	FVP4LED-P-DD
	CTP system compatible	Yes	-
	Motion Sensors	Yes (High/Low)	
	DALI	LVP4LED-M-P-DALI	-
		Zoneworks® XT HIVE	-
Carton Quantity		4	
Weight - single (carton)		5.2kg	4.1kg
Dimensions (L x W x H)		1400mm x 140mm x 120mm	1320mm x 140mm x 120mm

For Motion sensor version add –MS-HL to the product code as per the following example. VP4LED-M-P-MS-HL

TECHNICAL SPECIFICATIONS		L10	240V
Construction - Base		Pressure die-cast, low copper aluminium alloy body with powder coat paint finish	
Construction - Diffuser		Opal Impact Resistant Polycarbonate with Secure Access Screws (LSZH)	
Voltage (V) (Frequency (Hz))		220-240V (50Hz)	
Power Consumption ♦ (Standby / Max)		0.4W / 44W	43W
Nominal Total Light Output ♦		5135lm	
Lamp		LED Strip module	
Lamp CCT & Life ♦		4000K, 100,000 hrs (L80,B20, Ra>80, Ta40c)	
Operating Temperature		0°C to 40°C	
Ingress Protection Rating (IP)		IP66	
IK Rating		IK10	

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		L10	240V
Operating Mode		Maintained	-
Battery configuration		Pod	-
Battery type		Lithium Nanophosphate®	-
Voltage / Capacity (mAh)		6.6V / 2500mAh	-
Charging Method		Intelligent Current Limited Constant Voltage	-

CLASSIFICATION		L10	240V
C0		D100	-
C90		D50	-

SPARE PARTS		L10	240V
Battery		1530260	-
LED Strip		8002699	8002699

ARGONAUT VANDAL RESISTANT


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.9	24.9	25.4
D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28
D100	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	31.3	32.6	33.7

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

600mm/2ft no pod

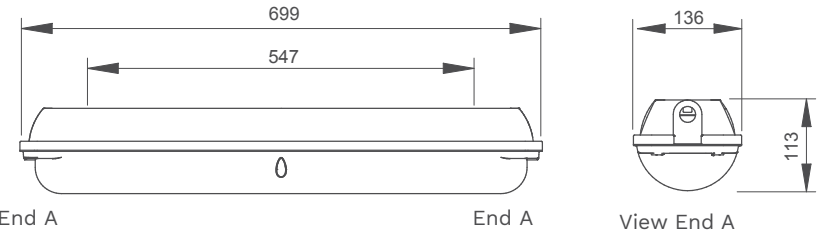


600mm/2ft with battery pod

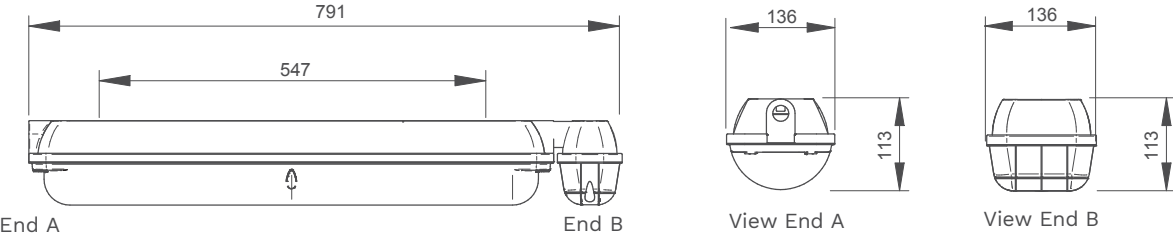

1200mm/4ft no pod



1200mm/4ft with battery pod

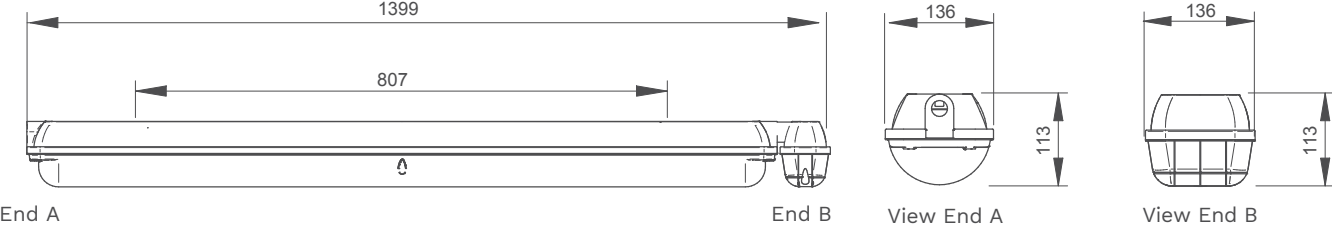

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.


EPIC INDOOR



Installation Guides & Information
Visit: clevertronics.com.au/epic



Switchable Colour & Dual Output
Indoor LED Batten Range

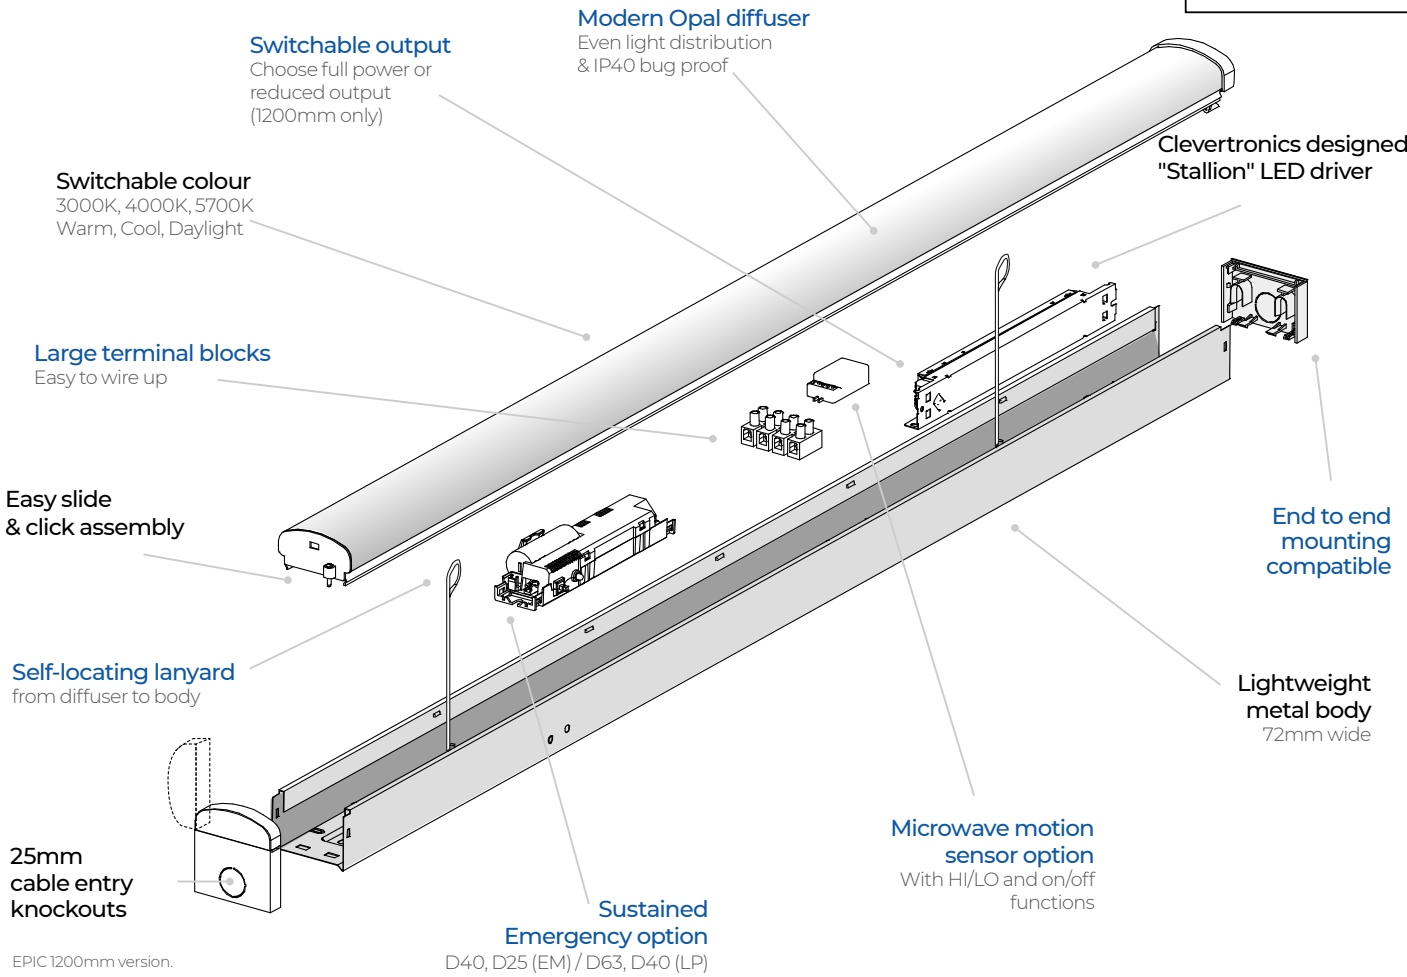

The EPIC Indoor LED batten range is a sleek and easy to install design combined with switchable colour and output featuring easy slide and click assembly, mounting template and large terminal block.

The emergency version contains market leading Lithium Iron Phosphate battery technology and testing options are available with the LP range.

Packed with features and backed by Clevertronics reliability, the EPIC is built to impress.


Applications

- Retail
- Offices
- Schools
- Corridors
- Back of House



Features and Benefits

- AS/NZS 2293.3 compliant
- Long life, energy efficient LED strip module
- Switchable colour (3000K / 4000K / 5700K)
- Switchable Output (varies by model)
- On-carton mounting template
- Large terminal block for easy installation
- Self-locating lanyard from diffuser to body
- Lithium (LiFePO₄) Battery Technology

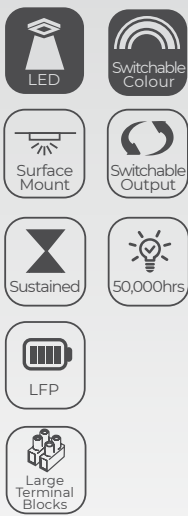

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

EPIC INDOOR 600MM

SWITCHABLE COLOUR

ORDERING INFORMATION		EMERGENCY (EL)	STANDARD
PART NUMBER	Nominal Size	600mm	600mm
	Standard	EPIC-600-EM	EPIC-600
	DALI Driver	No	
	Motion Sensors	EPIC-600-SEN-EM	EPIC-600-SEN
	CTP system compatible	No	-
	DALI*	-	-
	Zoneworks XT HIVE*	-	-
Carton Quantity		6	
Weight - Single (carton)		1.0 Kg	0.8 Kg
Dimensions (L X W X H)		605mm x 72mm x 78mm	

TECHNICAL SPECIFICATIONS	EMERGENCY (EL)	STANDARD
Construction - Base	Powder Coated Sheet Metal	
Construction - Diffuser	Co-extruded IP40 Polycarbonate Diffuser Assembly	
Voltage (V) (Frequency (Hz))	220-240V~ (50Hz)	
Power Consumption (Standby / Max) ♦	(See table on next page)	
Lamp ♦	Dual LED Strip Module	
Lamp(s) (CCT / Life)	3000K, 4000K, 5700K / 54000hr life (L70 / B50, Ra >80 Ta 40c)	
Nominal Total Light Output ♦	(See table on next page)	
Ingress Protection Rating (IP)	IP20	
Impact Rating (IK)	IK03	

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EMERGENCY (EL)	CLASSIFICATIONS	EMERGENCY (EL)		
Operating Mode	Sustained	C0	D40		
Battery Configuration	Integral	C90	D25		
Battery Type	Lithium Iron Phosphate	SPARE PARTS	EMERGENCY (EL)	STANDARD	
Voltage / mAh	3.2V / 3000mAh		Battery	1560150	-
Charging Method	Intelligent current limited constant voltage		LED Strip (w/o -SEN)	8050500	8050520
			LED Strip (w/-SEN)	8050510	8050500

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

EPIC INDOOR 600MM


SWITCHABLE COLOUR

NO SENSOR

POWER CONSUMPTION	Standby Charge/ Main Lamp On	Standby Charge/ Main Lamp Off	Main Lamp On	LUMEN OUTPUT	
	EL	EL	STANDARD	EL	STANDARD
3000K	18.9W	0.4W	18.5W	2011 lm	2011 lm
4000K	18.3W	0.4W	17.9W	2199 lm	2199 lm
5700K	19.0W	0.4W	18.6W	2082 lm	2082 lm

SENSOR

POWER CONSUMPTION	Standby Charge/ Main Lamp On	Standby Charge/Main Lamp On @ Min.10%	Standby Charge/ Main Lamp Off	Main Lamp On On	Main Lamp On @ Min.10%	LUMEN OUTPUT	
	EL	EL	EL	STANDARD	STANDARD	EL	STANDARD
3000K	20.1W	3.6W	0.4W	19.7W	3.2W	2011 lm	2011 lm
4000K	19.5W	3.6W	0.4W	19.1W	3.2W	2199 lm	2199 lm
5700K	20.2W	3.6W	0.4W	19.8W	3.2W	2028 lm	2028 lm

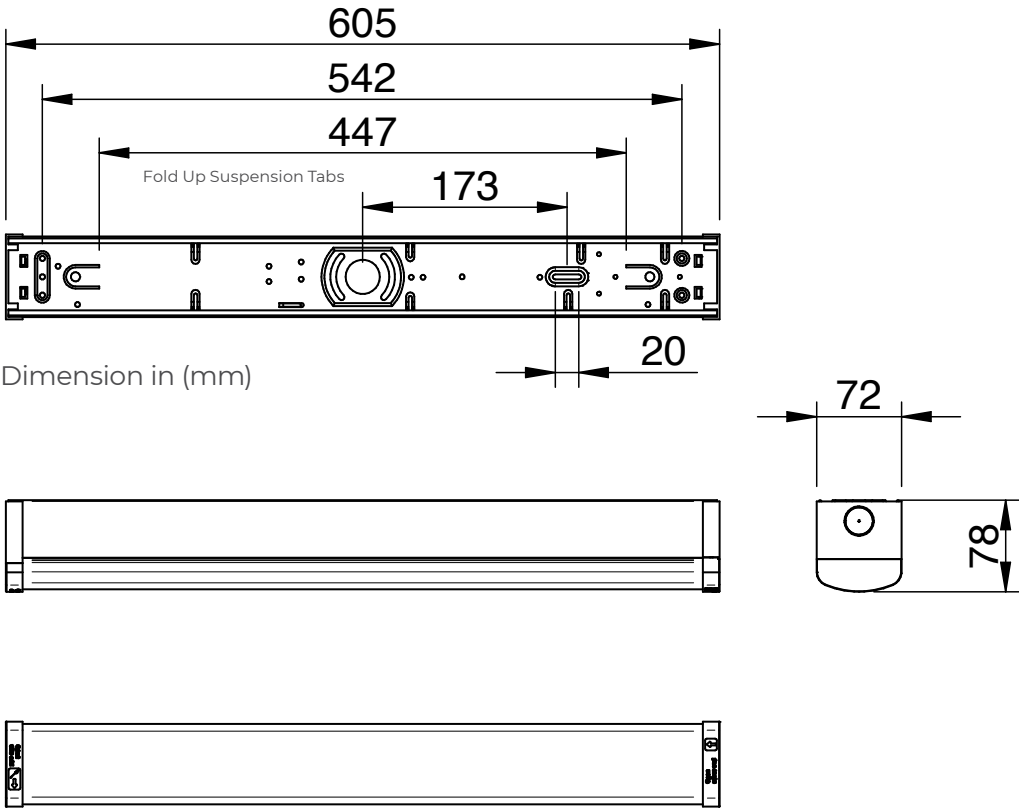

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

EPIC INDOOR 1200MM

SWITCHABLE COLOUR & OUTPUT

PART NUMBER	ORDERING INFORMATION		EMERGENCY (EL)	EMERGENCY (LP)	STANDARD
	Nominal Size		1200mm	1200mm	1200mm
	Standard		EPIC-1200-EM	EPIC-1200-LP	EPIC-1200
	DALI Driver		No		
	Motion Sensors		EPIC-1200-SEN-EM	EPIC-1200-SEN-LP	EPIC-1200-SEN
	CTP system compatible		No	Yes	-
	DALI*		-	EPIC-1200-LP-DALI	-
	Zoneworks XT HIVE*		-	EPIC-1200-LP-HV	-
	Carton Quantity		6		
	Weight - Single (carton)		1.7 Kg	1.8 Kg	1.6 Kg
Dimensions (L X W X H)		1203mm x 72mm x 78mm			

* For motion sensor version add -SEN to the product code as per following example: EPIC-1200-SEN-LP-DALI

TECHNICAL SPECIFICATIONS		EMERGENCY (EL)	EMERGENCY (LP)	STANDARD
Construction - Base		Powder Coated Sheet Metal		
Construction - Diffuser		Co-extruded IP40 Polycarbonate Diffuser Assembly		
Voltage [V] (Frequency [Hz])		220-240V~ (50Hz)		
Power Consumption (Standby / Max) ♦		(See table on next page)		
Lamp ♦		Dual LED Strip Module		
Lamp(s) (CCT / Life)		3000K, 4000K, 5700K / 54000hr life (L70 / B50, Ra >80 Ta 40c)		
Nominal Total Light Output ♦		(See table on next page)		
Ingress Protection Rating (IP)		IP20		
Impact Rating (IK)		IK03		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EMERGENCY (EL)	EMERGENCY (LP)
Operating Mode		Sustained	
Battery Configuration		Integral	
Battery Type		Lithium Iron Phosphate	
Voltage / mAh		3.2V / 3000mAh	3.2V / 6400mAh
Charging Method		Intelligent current limited constant voltage	

CLASSIFICATIONS		EMERGENCY (EL)	EMERGENCY (LP)
C0		D40	D63
C90		D25	D40

SPARE PARTS		EMERGENCY (EL)	EMERGENCY (LP)	STANDARD
Battery		1560150	1550230	-
LED Strip		8050570	8050580	8050590

SPACING TABLE & MOUNTING HEIGHTS - AS / NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D63	11.5	13.2	14.8	16.5	18.1	19.8	24.5	25.2	26.4	27.3	28.0	

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>


*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

EPIC INDOOR 1200MM

SWITCHABLE COLOUR & OUTPUT

NO SENSOR						LUMEN OUTPUT		
POWER CONSUMPTION		Standby Charge/ Main Lamp On		Standby Charge/ Main Lamp Off		Main Lamp On		
OUTPUT 2		EL	LP	EL	LP	STANDARD		
3000K		37.6W	37.6W	0.4W	0.4W	37.2W		4227 lm
4000K		35.9W	35.9W	0.4W	0.4W	35.5W		4673 lm
5700K		37.1W	37.1W	0.4W	0.4W	36.7W		4447 lm
OUTPUT 1								
3000K		18.5W	18.5W	0.4W	0.4W	18.1W		2277 lm
4000K		18.0W	18.0W	0.4W	0.4W	17.6W		2439 lm
5700K		18.3W	18.3W	0.4W	0.4W	17.9W		2413 lm

SENSOR									LUMEN OUTPUT		
POWER CONSUMPTION		Standby Charge/ Main Lamp On		Standby Charge/ Main Lamp On @ Min. 10%		Standby Charge/ Main Lamp Off		Main Lamp On	Main Lamp On @ Min. 10%		
		EL	LP	EL	LP	EL	LP	STAN-DARD	STAN-DARD	EL	LP
3000K		38.8W	38.8W	6.1W	6.1W	0.4W	0.4W	38.4W	5.7W	4227 lm	4227 lm
4000K		37.1W	37.1W	6.1W	6.1W	0.4W	0.4W	36.7W	5.7W	4673 lm	4673 lm
5700K		38.3W	38.3W	6.1W	6.1W	0.4W	0.4W	37.9W	5.7W	4447 lm	4447 lm

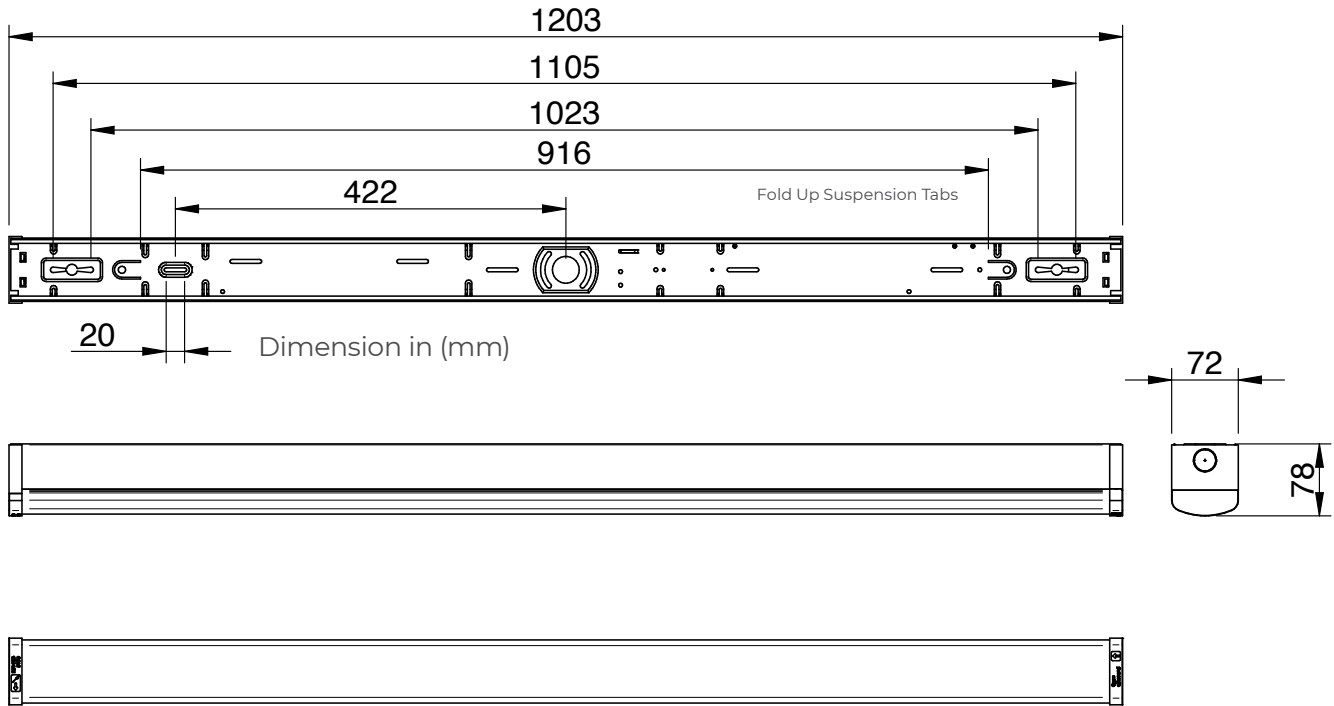

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ODYSSEY DIFFUSED



For Economy or Lower Cost Applications

The Odyssey steel batten range has been designed as an ideal solution for projects or applications where an economy or lower cost batten option is required.

Without compromising on features such as Lithium Iron Phosphate battery technology or emergency testing options including Zoneworks® XT HIVE, DALI or CTP the Odyssey Quantum is quality at the right price.

Applications

- Car Parks
- Corridors
- Stairwells
- Back of House
- Fire Stairs

Features and Benefits

- AS/NZS 2293.3 compliant
- LED Lamps
- Lithium Iron Phosphate Battery
- Microwave motion sensors
- Zoneworks® XT HIVE or DALI test options (with LP Premium)
- Clevertest Plus System compatible



ODYSSEY DIFFUSED 600MM

ORDERING INFORMATION		EL	LP	240V
TEST OPTIONS - PART #	Nominal Size	600mm	600mm	600mm
	Standard	EBS2LEDS-DIF-LI	CBS2LEDS-DIF	FBS2LED-DIF
	DALI Driver	-	CBS2LEDS-DIF-DD	FBS2LED-DIF-DD
	Motion Sensors ■	Yes (On/Off)		
	CTP System Compatible	No	Yes	-
	DALI	-	CBS2LEDS-DIF-DALI	-
	Zoneworks® XT HIVE	-	CBS2LEDS-DIF-HV	-
Carton Quantity		1		
Weight - single (carton)		2.0kg	2.0kg	1.8kg
Dimensions (L x W x H)		630mm x 120mm x 108mm	664mm x 120mm x 108mm	630mm x 120mm x 108mm

■ For Motion sensor version add -MS to the product code as per the following example: EBS2LEDS-DIF-MS-LI

TECHNICAL SPECIFICATIONS		EL	LP	240V
Construction - Base		Powder Coated Steel		
Construction - Diffuser		Acrylic Prismatic		
Voltage (V) (Frequency (Hz))		220-240V(50Hz)		
Power Consumption ♦ (Standby / Max)		0.4W / 19W		20W
Lamp(s) (CCT / Life) ♦		4000K / 50,000hrs (L70 / B50 Ra>80 Ta40)		
Lamp		LED Strip Module		
Nominal Total Light Output ♦		2250lm		
Operating Temperature		1°C to 40°C		
Ingress Protection Rating (IP)		IP20		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EL	LP
Operating Mode		Sustained	
Battery Configuration		Integral	POD
Battery Type		Lithium Iron Phosphate	
Voltage / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh
Charging Method		Intelligent Current Limited Constant Voltage	

CLASSIFICATION		EL	LP
C0		D50	D40
C90		C50	D40

SPARE PARTS		EL	LP	240V
Battery		1560156	1550050	-
LED Strip		8002695	8002695	8002695

All product data is current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ODYSSEY DIFFUSED 1200MM

ORDERING INFORMATION		EL		LP		240V	
Nominal Size		1200mm		1200mm		1200mm	
TEST OPTIONS PART #	Standard	EBS4LEDS-DIF-LI	EBS4LEDS-LO-DIF-LI	CBS4LEDS-DIF	CBS4LEDS-LO-DIF	FBS4LED-DIF	FBS4LED-LO-DIF
	DALI Driver	-	-	CBS4LEDS-DIF-DD	CBS4LEDS-LO-DIF-DD	FBS4LED-DIF-DD	FBS4LED-LO-DIF-DD
	Motion Sensors ■	Yes (High/Low)					
	CTP System Compatible	No		Yes		-	
	DALI	-		CBS4LEDS-DIF-DALI	CBS4LEDS-LO-DIF-DALI	-	
	Zoneworks® XT HIVE	-		CBS4LEDS-DIF-HV	CBS4LEDS-LO-DIF-HV	-	
	Carton Quantity	1					
Weight - single (carton)		3.3kg	3.3kg	3.3kg	3.3kg	3.0kg	3.0kg
Dimensions (L x W x H)		1238mm x 120mm x 108mm		1271mm x 120mm x 108mm		1238mm x 120mm x 108mm	

■ For Motion sensor version add –MS-HL to the product code as per the following example. EBS4LEDS-DIF-MS-HL-LI

TECHNICAL SPECIFICATIONS	EL		LP		240V			
	Construction - Base						Powder Coated steel	
	Construction - Diffuser						Acrylic Prismatic	
	Voltage (V) (Frequency (Hz))						220-240V (50Hz)	
	Power Consumption ♦ (Standby / Max)		0.4W / 39W	0.4W / 19W	0.4W / 39W	0.4W / 19W	39W	19W
	Lamp(s) (CCT / Life) ♦		4000K / 50,000hrs (L70 / B50 Ra>80 Ta40)					
	Lamp		LED Strip Module					
	Nominal Total Light Output ♦		4500lm	2250lm	4500lm	2250lm	4500lm	2250lm
	Operating Temperature		1°C to 40°C					
Ingress Protection Rating (IP)		IP20						

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EL		LP	
	Operating Mode		Sustained	
	Battery Configuration		Integral	POD
	Battery Type		Lithium Iron Phosphate	
	Voltage / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh
	Charging Method		Intelligent Current Limited Constant Voltage	

CLASSIFICATION	EL		LP	
	C0		D50	D40
	C90		D16	D40

SPARE PARTS	EL		LP		240V	
	Battery		1560156	1550050	-	
	LED Strip		8002695	8002695	8002695	

ODYSSEY DIFFUSED


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
C50	11.3	12.0	12.7	13.4	14.0	14.5	15.2	16.0	16.7	17.9	18.8	19.6
D16	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>


600mm/2ft no pod

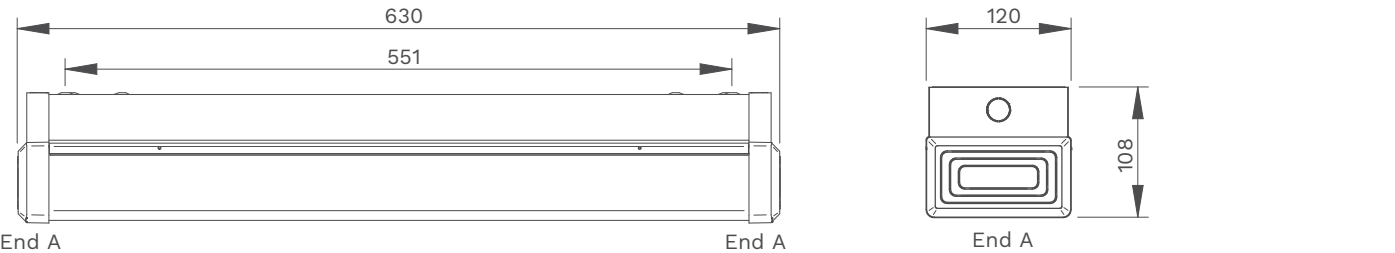


600mm/2ft with pod

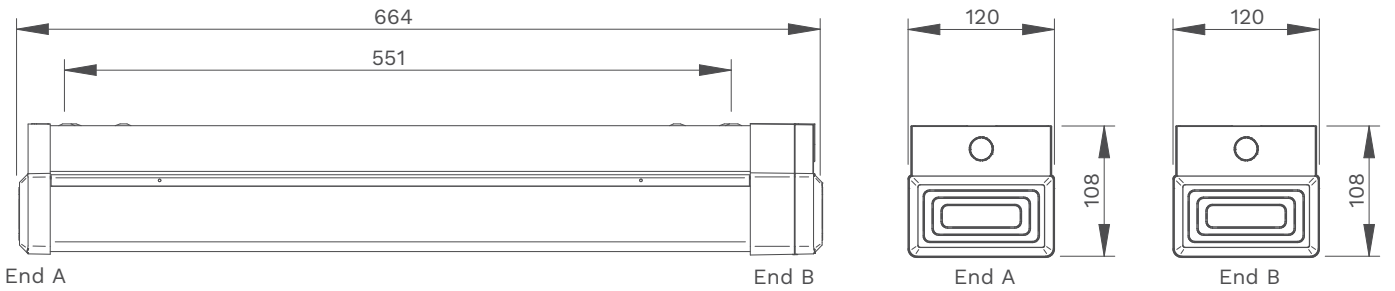


1200mm/4ft no pod

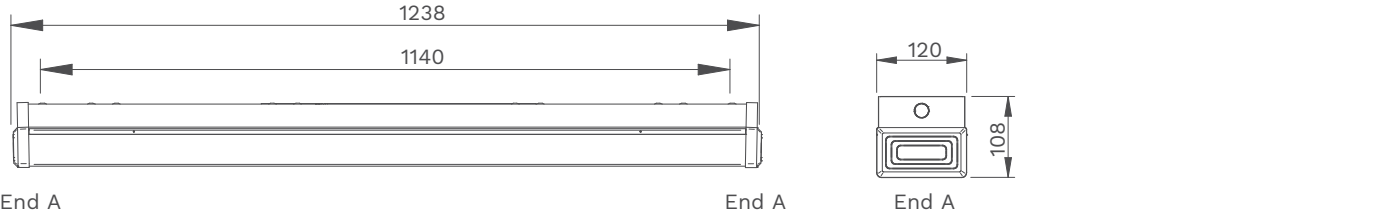

1200mm/4ft with pod

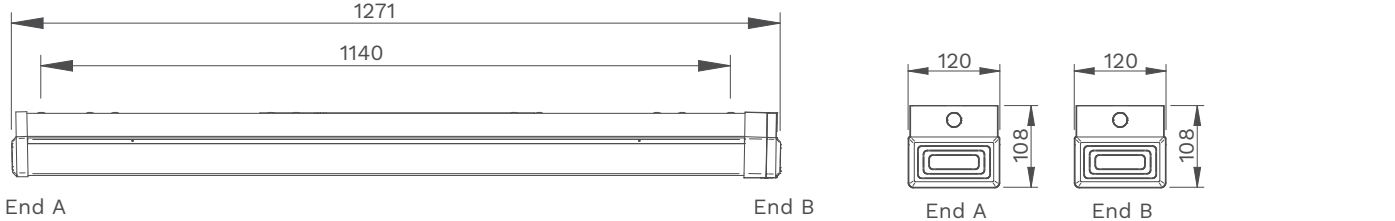


ODYSSEY WIREGUARD

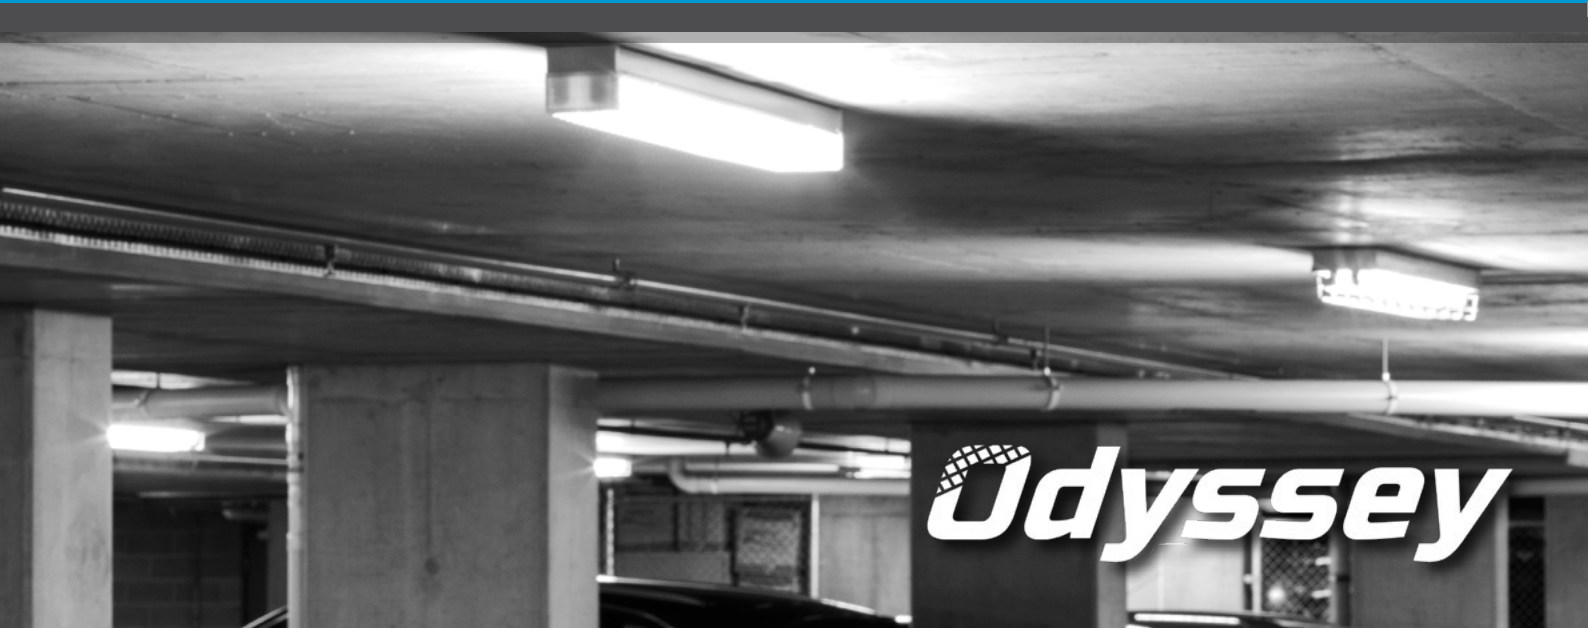

Steel Batten Range
at the Right Price

The Odyssey steel batten range has been designed as an ideal solution for projects or applications where an economy or lower cost batten option is required.

Without compromising on features such as Lithium Iron Phosphate battery technology or emergency testing options including Zoneworks® XT HIVE, DALI or CTP. Odyssey is quality at the right price.

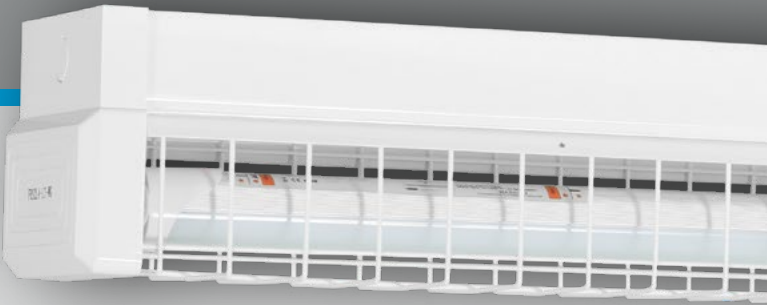

Features and Benefits

- AS/NZS 2293.3 compliant
- LED tube
- Lithium Iron Phosphate Battery
- Microwave motion sensors
- Zoneworks® XT HIVE or DALI test options (with LP Premium)
- Clevertest Plus System compatible



Applications

- Car Parks
- Stairwells
- Fire Stairs
- Corridors
- Back of House

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

ODYSSEY WIREGUARD 600MM

ORDERING INFORMATION		EL	LP	240V
Nominal Size		600mm	600mm	600mm
TEST OPTIONS - PART #	Standard	EBS2L2S-WG-LI	CBS2L2S-LT-WG	FBS2L2-LT-WG
	Motion Sensors	Yes (On/Off)		
	CTP System Compatible	No	Yes	-
	DALI	-	CBS2L2S-LT-WG-DALI	-
	Zoneworks® XT HIVE	-	CBS2L2S-LT-WG-HV	-
Carton Quantity		1		
Weight - single (carton)		2.2kg		1.8kg
Dimensions (L x W x H)		664mm x 120mm x 108mm		630mm x 120mm x 108mm

For Motion sensor version add -MS to the product code as per the following example. EBS2L2S-WG-LI-MS

TECHNICAL SPECIFICATIONS	EL	LP	240V
Construction - Base	Powder Coated Steel		
Voltage (V) (Frequency (Hz))	220-240V (50Hz)		
Power Consumption (Standby / Max) ♦	0.4W / 16W	1.0W / 17W	16W
Lamp(s) (CCT / Life) ♦	4000K / 30,000hrs (L70 / B50 Ra>80 Ta40c)		
Lamp	LED Tube		
Nominal Total Light Output ♦	1500lm		
Operating Temperature	1°C to 40°C		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EL	LP
Operating Mode	Sustained	
Battery Configuration	POD	
Battery Type	Lithium Iron Phosphate	
Voltage / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage	

CLASSIFICATION	EL	LP
C0	D40	
C90	D40	

SPARE PARTS	EL	LP	240V
Battery	1560150	1550050	-
LED Tube	3170030	3170030	3170030

ODYSSEY WIREGUARD 1200MM

TEST OPTIONS PART NO.	ORDERING INFORMATION		EL	LP	240V
	Nominal Size		1200mm	1200mm	1200mm
	Standard		EBS2L4S-WG-LI	CBS2L4S-LT-WG	FBS2L4-LT-WG
	Motion Sensors		Yes (On/Off)		
	CTP System Compatible		No	Yes	-
	DALI		-	CBS2L4S-LT-WG-DALI	-
	Zoneworks® XT HIVE		-	CBS2L4S-LT-WG-HV	-
Carton Quantity			4		
Weight - single (carton)			3.9kg		3.3kg
Dimensions (L x W x H)			1271mm x 120mm x 108mm		1238mm x 120mm x 108mm

For Motion sensor version add -MS to the product code as per the following example. EBS2L4S-WG-LI-MS

TECHNICAL SPECIFICATIONS	EL	LP	240V
	Construction - Base		
	Powder Coated Steel		
	Voltage (V) (Frequency (Hz))		
	220-240V (50Hz)		
	Power Consumption ♦ (Standby / Max)	0.4W / 40W	1.0W / 40W
	Lamp(s) (CCT / Life) ♦	4000K / 30,000hrs (L70 / B50 Ra>80 Ta40c)	
Lamp			LED Tube
Nominal Total Light Output ♦			3800lm
Operating Temperature			1°C to 40°C

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EL		LP		
	Operating Mode				
	Sustained				
	Battery Configuration				
	POD				
	Battery Type				
Lithium Iron Phosphate					
Voltage / Capacity (mAh)		3.2V / 3000mAh		3.2V / 3200mAh	
Charging Method		Intelligent Current Limited Constant Voltage			

CLASSIFICATION	EL	LP
C0	D40	
C90	D40	

SPARE PARTS	EL	LP	240V
Battery	1560150	1550050	-
LED Tube	3170080	3170080	3170080


ODYSSEY WIREGUARD

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>


600mm/2ft no pod

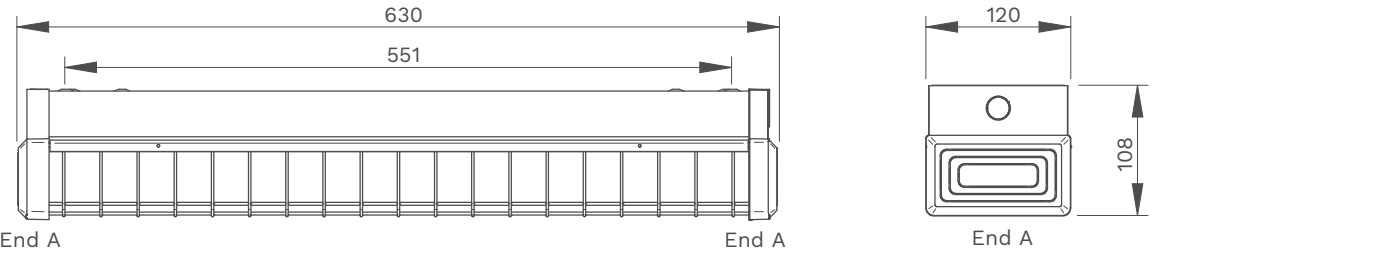


600mm/2ft with pod

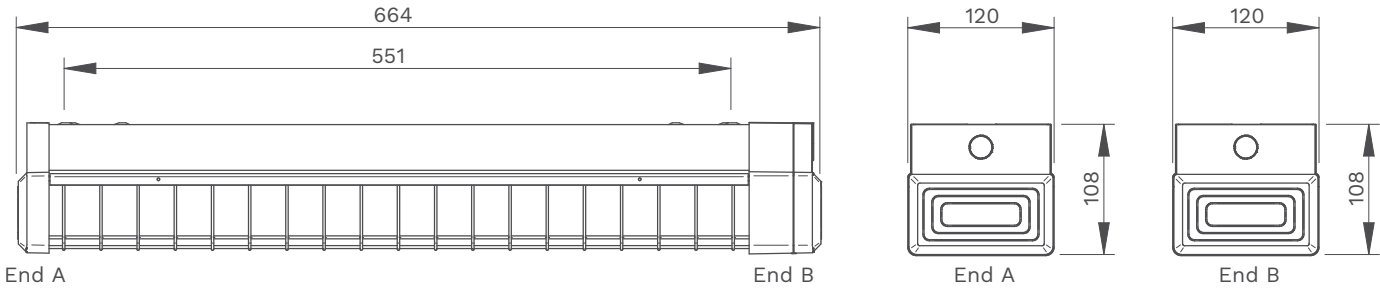

1200mm/4ft no pod

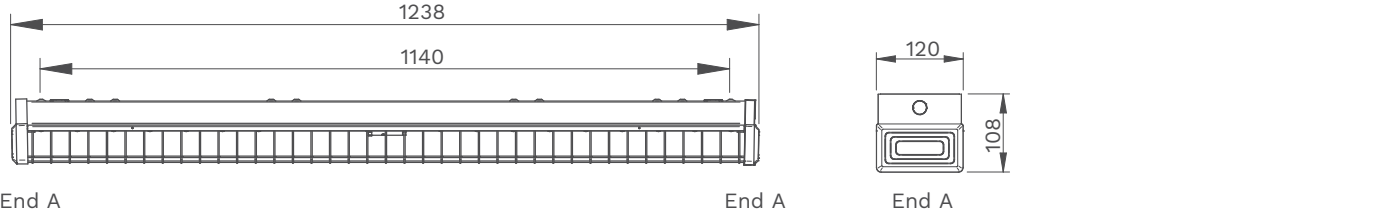

1200mm/4ft with pod

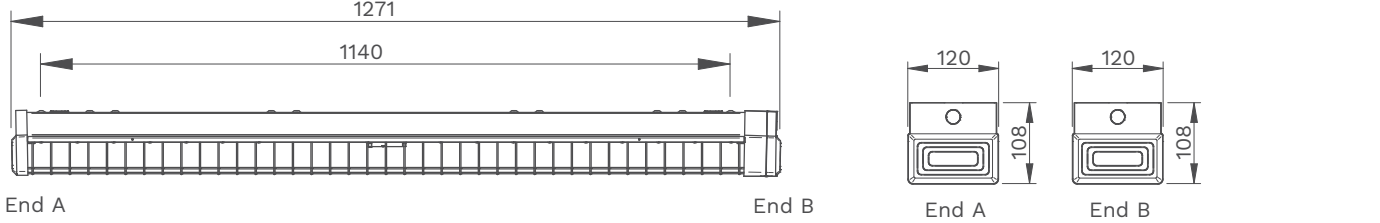

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

BARE EMERGENCY



Steel Batten Range
at the Right Price

The Bare Emergency batten range has been designed as an ideal solution for projects or applications where a non-maintained emergency light is required to cover existing paint lines of a traditional batten.

Available in EL, LP or L10 featuring lithium battery technology and CTP, DALI or Zoneworks® XT HIVE testing options.








Features and Benefits

- AS/NZS 2293.3 compliant
- Lithium Iron Phosphate Battery
- Zoneworks® XT HIVE or DALI test options in LP Premium and L10
- Clevertest Plus System compatible



Applications

-  Office buildings
-  Corridors
-  Galleries
-  Back of House
-  Schools

EL

LITHIUM IRON PHOSPHATE

ECONOMY

LOWEST UP FRONT COST

LP

LITHIUM IRON PHOSPHATE

PREMIUM

PREMIUM PROJECT PERFORMANCE

L10

LITHIUM NANOPHOSPHATE*

OPTIMUM

NOTHING ELSE COMPETES WITH NANOPHOSPHATE*

BARE EMERGENCY 600MM

ORDERING INFORMATION		EL	LP	L10
TEST OPTIONS - PART #	Nominal Size	600mm	600mm	600mm
	Standard	EBS2N-LI	CBS2N	LBS2N
	Motion Sensors	No		
	CTP System Compatible	No	Yes	
	DALI	-	CBS2N-DALI	LBS2N-DALI
	Zoneworks® XT HIVE	-	CBS2N-HV	LBS2N-HV
Carton Quantity		1		
Weight - single (carton)		1.3kg	1.5kg	1.6kg
Dimensions (L X W x H)		611mm x 111mm x 54mm		

TECHNICAL SPECIFICATIONS		EL	LP	L10
Construction - Base		Powder Coated Steel		
Voltage (V) (Frequency (Hz))		220-240V (50Hz)		
Power Consumption ♦ (Standby / Max)		0.4W / 1.3W	1.0W / 4.2W	1.3W / 3.0W
Lamp		1 x LED Lifelight (Lifetime warranty on the lamp head and loom assembly)		
Operating Temperature		1°C to 40°C		

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS		EL	LP	L10
Operating Mode		Non-Maintained		
Battery Configuration		Integral		
Battery Type		Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage / Capacity (mAh)		3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method		Intelligent Current Limited Constant Voltage		

CLASSIFICATION	EL	LP	L10
C0		D40	
C90		D40	

SPARE PARTS	EL	LP	L10
Battery	1560150	1550010	1530010

BARE EMERGENCY 1200MM

ORDERING INFORMATION		EL	LP	L10
Nominal Size		1200mm	1200mm	1200mm
TEST OPTIONS PART NO.	Standard	EBS4N-LI	CBS4N	LBS4N
	Motion Sensors	No		
	CTP System Compatible	No	Yes	
	DALI	-	CBS4N-DALI	LBS4N-DALI
	Zoneworks® XT HIVE	-	CBS4N-HV	LBS4N-HV
Carton Quantity		1		
Weight - single (carton)		2.2kg	2.2kg	2.3kg
Dimensions (L x W x H)		1219mm x 111mm x 54mm		

TECHNICAL SPECIFICATIONS	EL		LP		L10	
	Construction - Base					
	Powder Coated Steel					
	Voltage (V) (Frequency (Hz))					
	220-240V (50Hz)					
Power Consumption ♦ (Standby / Max)	0.4W / 1.3W		0.4W / 2.7W		0.4W / 2.7W	
Lamp	1 x LED		2 x LED			
Operating Temperature	1°C to 40°C					

♦ Please refer to the specific product data sheet for actual power, light output, lamp lifetime and driver values.

EMERGENCY SPECIFICATIONS	EL	LP	L10
Operating Mode	Non-Maintained		
Battery Configuration	Integral		
Battery Type	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage / Capacity (mAh)	3.2V / 3000mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		

CLASSIFICATION	EL	LP	L10
C0	D40	D80	
C90	D40	D80	

SPARE PARTS	EL	LP	L10
Battery	1560150	1550230	1530230

BARE EMERGENCY


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².


For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

600mm/2ft

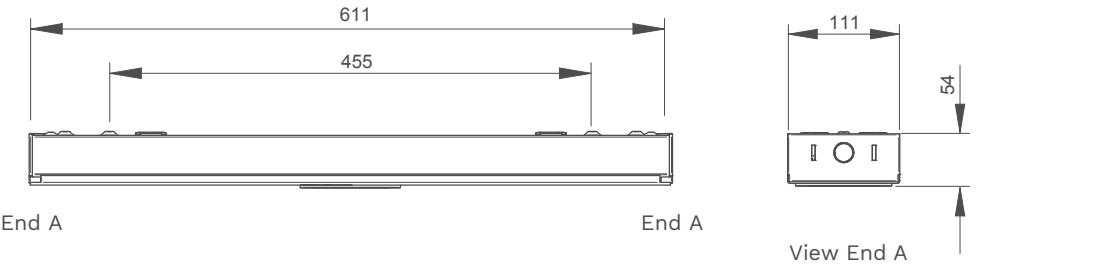

1200mm/4ft

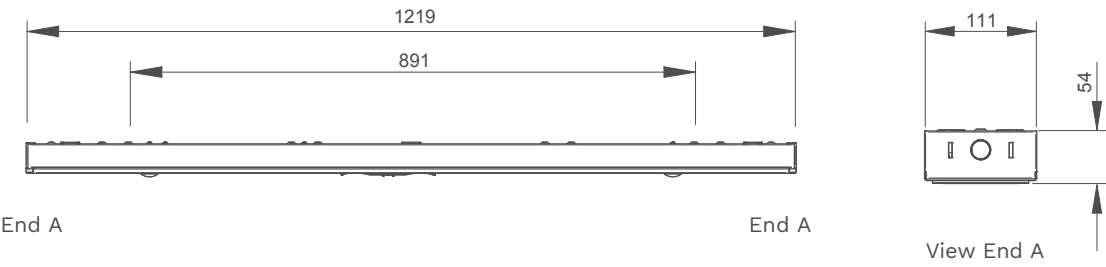

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.



TEMPORARY EXITS & BATTENS

24V Temporary Exit	168
24V Temporary Weatherproof Batten	170

24V Temporary Lighting Range



Overview

The purpose of a 24V temporary lighting system is to provide the contractor a safe and flexible solution when installing and moving temporary lighting systems on construction sites to meet the requirements outlined in AS/ NZS 3012. Egress routes and work areas often change on construction sites and therefore the lighting systems must move with the ever-changing site.

Why use 24V?

By using a SELV 24V lighting system, the mechanical protection and containment requirements are significantly easier to achieve, resulting in faster installations, removal and relocation – this saves a lot of time, money and improves site safety.

Cabling System

The Clevertronics 24V temporary lighting system provides a flexible and scalable solution for general and emergency lighting on site. This is ideal for the ever changing environment at a construction site to save time and significantly reduce labour cost.

All Clevertronics 24V temporary luminaires come with single or end-to-end pre-wired connectors. The keyed connectors ensure correct polarity during installation, eliminating wiring errors.

Switched control of General Lighting

3-core (switched +DC, permanent +DC and -VE) cabling arrangement allowing for the on/ off switching of the general lighting function of the battens whilst maintaining a permanent supply to the emergency battery chargers. This feature provides energy savings and increased lifetime of the weatherproof battens, by switching the battens off when not required, without discharging the emergency batteries and maintaining site safety.

24V Cabling System – Plug & Play

- Provides scalable and flexible installation
- Switched control of general 24V lighting possible while maintaining supply to keep emergency batteries charged & ready
- Enables easy connecting for general and emergency luminaires
- 3-way and 4-way “splitter connector” connection allows for multiple connections
- 4m, 6m and 8m, 3 core interconnecting cable available



24V Emergency Luminaires

Temporary Weatherproof Batten Range

- Lithium Iron Phosphate batteries
- Chain suspension or surface mounting options
- Switchable control of the general lighting possible whilst maintaining continuous permanent charge of the batteries.
- Available in 600mm or 1200mm
- Available with flex & plug from both ends for end-to-end cabling
- AS/NZS 2293.3 compliant with 1 hour emergency duration in accordance with AS/NZS3012

Weatherproof Dual Output 24V DC Power Supply

- Supplied with 2 short length flex and plug outputs for connection to the temporary lighting cabling system.
- 24V DC output switch that allows supply to be switched off whilst still maintaining permanent supply to continuously charge battery.

24V Exit Signs

Temporary Exit Range

- Lithium Iron Phosphate batteries
- Chain suspension or surface mounting options
- Weatherproof options available
- All directional decals in one box
- Comes with 24V flex & plug for simple plug & play
- AS/NZS 2293.3 compliant with 1 hour emergency duration in accordance with AS/NZS3012



Features

Simple installation

All products are fitted with flex & plug for simple plug & play approach with the option of surface or suspension mounting.

Reliable

The LED's fitted into the emergency luminaires are suited to environments where vibration is present. This will limit premature failure of the lamps.


Safe

All products using 24V Temporary lighting saves time and improves site safety.

Value add

All products are ready to go so compliance can be achieved with minimal fuss and no added cost.

24V Example layout

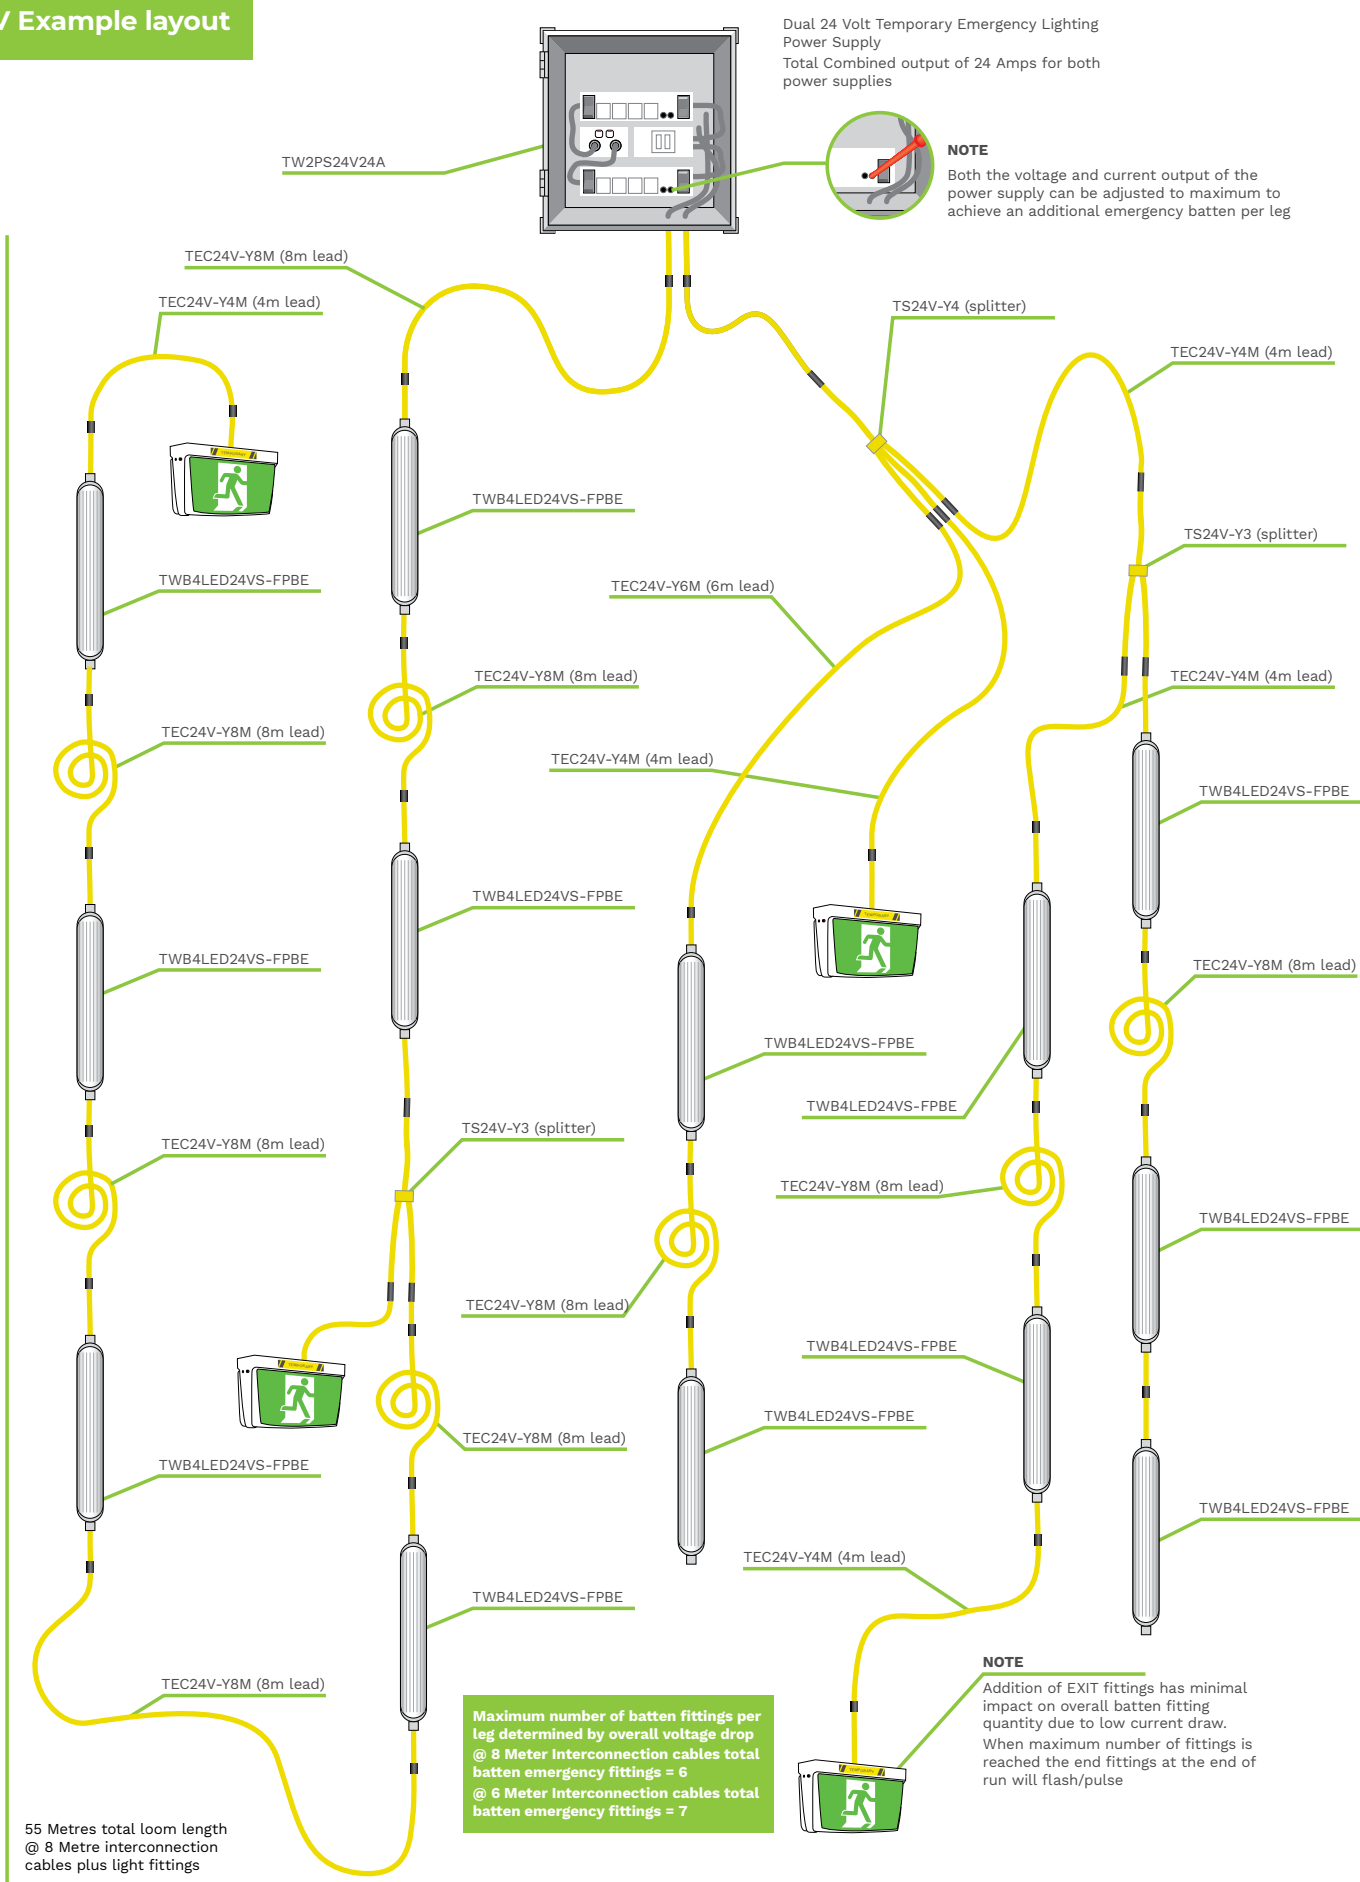

24V COMPONENTS


SYSTEM COMPONENTS	PART NUMBER
4M Extension cable	TEC24V-4M
6M Extension cable	TEC24V-6M
8M Extension cable	TEC24V-8M
Splitter Connector – 3 Way	TS24V-3
Splitter Connector – 4 Way	TS24V-4
Connector locking device	TLOCK
24V DC Power Supply 20A. WP with Hinged, Lockable Front Cover	TWPS24V20A

24V DC TEMPORARY POWER SUPPLY

PRODUCT INFORMATION	
Part Number	TWPS24V20A
Description	Temporary weatherproof 24V DC power supply, 20A IP65. Supplied with a short length flex and plug (output) for connection to the temporary lighting cabling system
Construction	Polycarbonate enclosure
Mounting	Surface mount
Dimensions L x W x H	300mm x 300mm x 180mm
Weight	5.7kg
Charging Method	Intelligent current limited constant voltage
Operating Voltage	240V AC; 50Hz
Rated Output Voltage	24V DC
Rated Output Current	20A (Max)
IP Rating	IP65
Operating Temperature	0°C to 40°C

REPLACEMENT PARTS	
1196700	Power Supply, NDR-480

24V TEMPORARY EXIT

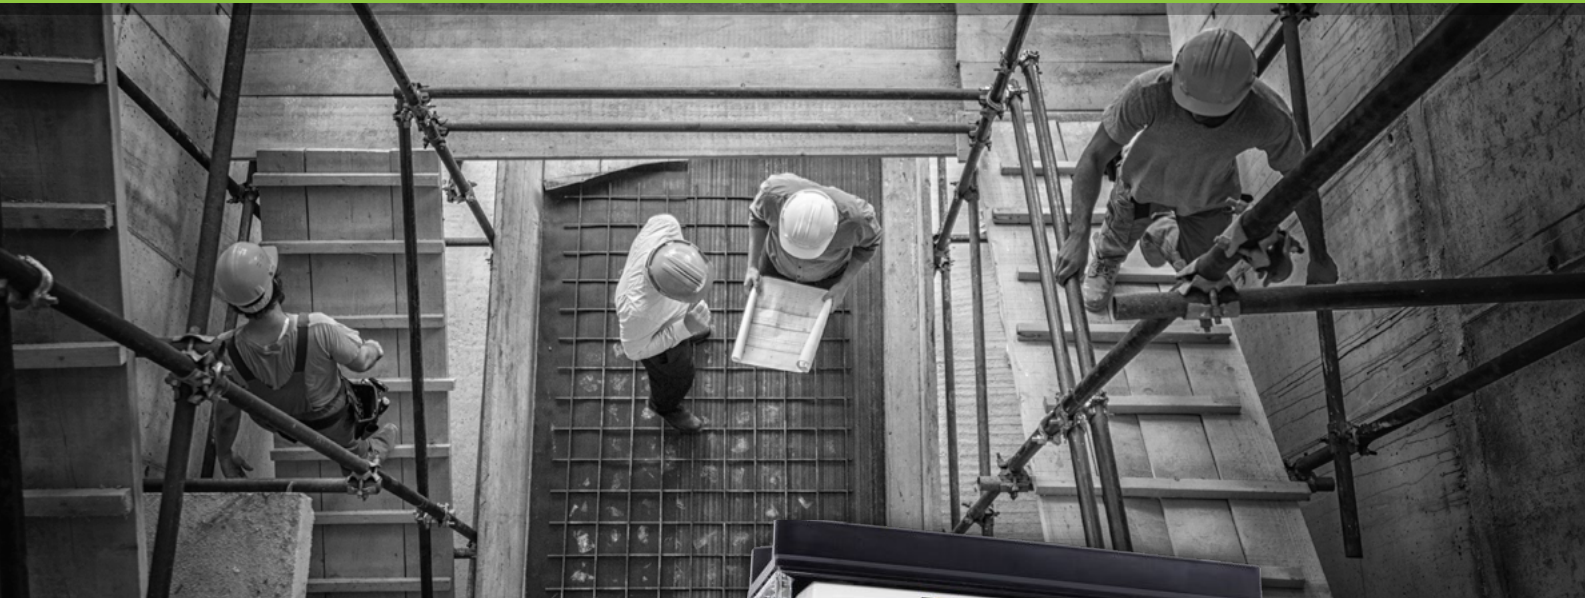

Designed for Temporary Exit Applications

The 24V Temporary Exit has been designed to assist those responsible for ensuring compliance to AS/NZS 3012 – “Electrical installations on construction sites and demolition sites.”

Installation is easy with a flex & plug. Chain suspension hooks are fitted to the IP20 (indoor) version as standard.

The tamper resistant cover make the 24V Temporary Exit the easiest choice for all construction sites.

Applications

 Construction Sites



Features and Benefits

- AS/NZS 2293.3 compliant with 1 hour emergency duration in accordance with AS/NZS3012
- Low 1.5W standby power consumption
- Wall, ceiling and chain mount options
- All directional decals in one box
- Hooks for chain mounting
- 24V SELV Plug & Play connection



24V TEMPORARY EXIT

ORDERING INFORMATION	INDOOR ①	OUTDOOR ②
	TCFLED24V	TWELED24V
Part Number	TCFLED24V	TWELED24V
Carton Quantity	1	1
Weight - single (carton)	1.2kg	2.8kg
Dimensions (L x W x H)	355mm x 80mm x 215mm	410mm x 272mm x 100mm
Directional Options	All Directional Inserts Included	All Directional Inserts Included

POWER, LAMPS AND BATTERY	INDOOR	OUTDOOR
Power Consumption (Standby / Max)		1.1W (Standby)
Lamp(s)		50,000 Hours
Battery		Lithium Iron Phosphate
Voltage (V) / Capacity (mAh)		3.2V / 3000mAh
Charging Method		Intelligent current limited constant voltage

TECHNICAL SPECIFICATIONS	INDOOR	OUTDOOR
Operating Mode	Maintained	
Voltage (V) Frequency (Hz)	19-28VDC	19-28VDC
Construction - Body / Diffuser	PC-ABS / PC	Cleverfit Inside Glass Reinforced Nylon Base and PC Cover
Viewing Distance	24m	
Mounting Type	Suspended or Wall Mount	Wall and Ceiling (Single and Double Sided)
Operating Temperature	1°C to 40°C	0°C to 40°C
Ingress Protection Rating (IP)	IP20	IP66/67, IK10


SPARE PARTS	INDOOR	OUTDOOR
Battery	1560150	

CLASSIFICATION – AS/ NZS 2293.1:2018	INDOOR	OUTDOOR
C0	D4	D2.5
C90	E2.5	E1.6


*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Product Configuration:

- ① Indoor
- ② Outdoor

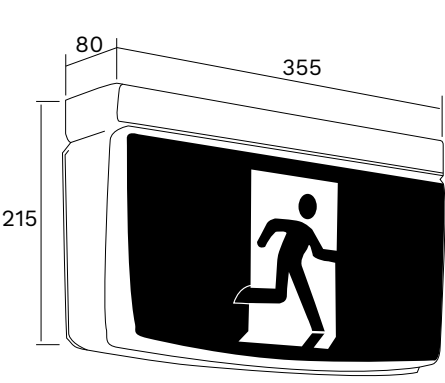

1

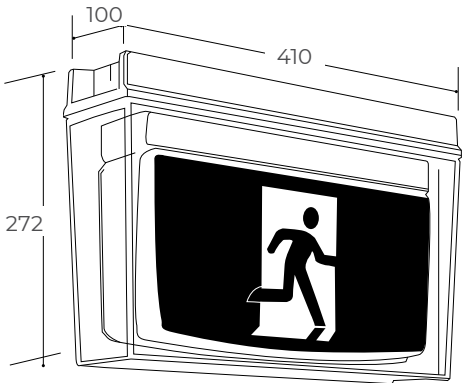

2

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

24V TEMPORARY WEATHERPROOF BATTEN




24V Project Batten for fast & flexible installation

The purpose of a 24V temporary lighting system is to provide the contractor flexibility when installing and moving temporary lighting systems on construction sites.

Egress routes and work areas often change on construction sites and therefore the lighting systems must move with the ever-changing site.

Applications

 Construction sites

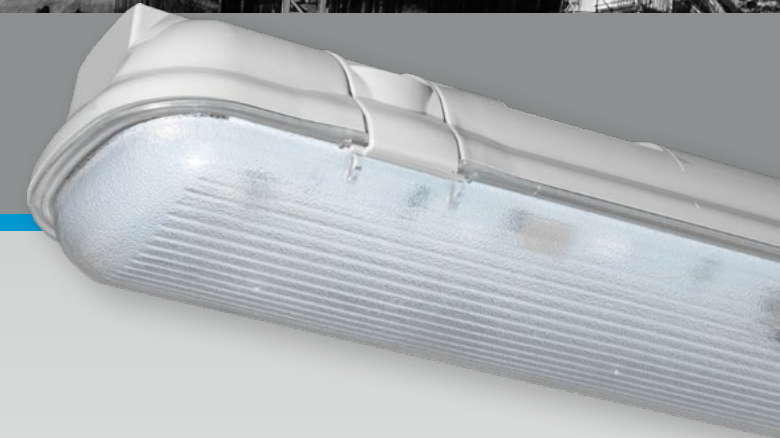

Features and Benefits

- AS/NZS 2293.3 compliant
- Switchable LED
- IP65 rated
- Surface Mount or Chain Suspension
- 24 V SELV Plug & Play connections



24V TEMPORARY WEATHERPROOF 600MM BATTEN



ORDERING INFORMATION	SUSTAINED EM 24V	24V
Nominal Size	600mm	600mm
Standard (End-to-end flex & plug)	TWB2LED24VS-FPBE	TWB2LED24V-FPBE
Carton Quantity	1	
Weight - single (carton)	1.0kg	
Dimensions (L x W X H)	666mm x 89mm x 70mm	

TECHNICAL SPECIFICATIONS	SUSTAINED EM 24V	24V
Construction - Base	Acrylonitrile Butadiene Styrene	
Construction - Diffuser	UV Stabilised Polycarbonate	
Voltage (V)	19-28V DC	
Power Consumption (Standby / Max)	0.4W / 17W	
Nominal Total Light Output	1900lm	
Lamp	LED Strip module	
Lamp CCT & Life	4000K, 50,000hrs L70/B50	
Operating Temperature	0°C to 40°C	
Ingress Protection Rating (IP)	IP65	
IK Rating	IK06 (Base), IK08 (Diffuser)	

EMERGENCY SPECIFICATIONS	SUSTAINED EM 24V	24V
Operating Mode	Sustained	-
Battery configuration	Integral	-
Battery type	Lithium Iron Phosphate	-
Voltage / Capacity (mAh)	3.2V / 3000mAh	-
Charging Method	Intelligent Current Limited Constant Voltage	-

CLASSIFICATION – AS/ NZ 2293.3	SUSTAINED EM 24V	24V
Co	D80	-
C90	D50	-

SPARE PARTS	SUSTAINED EM 24V	24V
Battery	1560150	-

24V TEMPORARY WEATHERPROOF 1200MM BATTEN

ORDERING INFORMATION	SUSTAINED EM 24V	24V
Nominal Size	1200mm	1200mm
Standard (End-to-end flex & plug)	TWB4LED24VS-FPBE	TWB4LED24V-FPBE
Carton Quantity	1	
Weight - single (carton)	1.7kg	1.6kg
Dimensions (L x W x H)	1268mm x 89mm x 70mm	

TECHNICAL SPECIFICATIONS	SUSTAINED EM 24V	24V
Construction - Base	Acrylonitrile Butadiene Styrene	
Construction - Diffuser	UV Stabilised Polycarbonate	
Voltage (V)	19-28V DC	
Power Consumption (Standby / Max)	0.4W / 33W	
Nominal Total Light Output	3800lm	
Lamp	LED Strip module	
Lamp CCT & Life	4000K, 50,000hrs L70/B50	
Operating Temperature	0°C to 40°C	
Ingress Protection Rating (IP)	IP65	
IK Rating	IK06 (Base), IK08 (Diffuser)	

EMERGENCY SPECIFICATIONS	SUSTAINED EM 24V	24V
Operating Mode	Sustained	-
Battery configuration	Integral	-
Battery type	Lithium Iron Phosphate	-
Voltage / Capacity (mAh)	3.2V / 3000mAh	-
Charging Method	Intelligent Current Limited Constant Voltage	-

CLASSIFICATION	SUSTAINED EM 24V	24V
C0	D80	-
C90	D50	-

SPARE PARTS	SUSTAINED EM 24V	24V
Battery	1560150	-

24V TEMPORARY WEATHERPROOF BATTEN


Design methods for demonstrating emergency lighting compliance
There are three design methods for demonstrating emergency lighting compliance under AS/NZ3012 “Electrical installations on construction sites and demolition sites.” Emergency lighting shall be provided in stairways, passageways and adjacent to switchboards, on all demolition and construction sites where the general lighting cannot be met using natural lighting. Such lighting shall allow safe access to and egress from the site and shall provide the lighting levels specified in Items (a), (b) or (c) below.
Emergency lighting shall, in the required areas
(a) provide an average of 20 lux at 900 mm above floor level along the centre-line of the corridor containing the emergency luminaires; or

(b) be installed using luminaires complying with the luminaire classification, mounting height and spacing, as specified in AS/NZS3012 Tables 2, 3, 4 and 5.
(c) be installed based on calculations of illuminance complying with Clause 4.6.1 of AS/NZS 2293.1—2018 and using a minimum horizontal illuminance of 3 lux. The emergency lighting level shall be provided for a minimum of one hour following loss of normal lighting in the area.
Note: Both (a) and (c) methods require lux plot calculations using specialised software by a qualified lighting designer.
Example (a): Installing the TWB4LED24VS-FPBE battens 8m apart end to end at a height of 3m will deliver 20lx @ 900mm AFL in a line directly below the luminaires for 1 hour during a power failure. (With fully charged batteries).


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 3012 (MINIMUM LIGHT LEVEL OF 3 LUX)												
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m
D50	6.5	6.6	6.6	6.6	6.5	6.3	5.9	0.0	0.0	0.0	0.0	0.0
D80	7.9	8.1	8.3	8.4	8.4	8.4	8.3	8.0	7.6	0.0	0.0	0.0

For 1 lux and AS/NZS 2293.1:2018 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

600mm/2ft

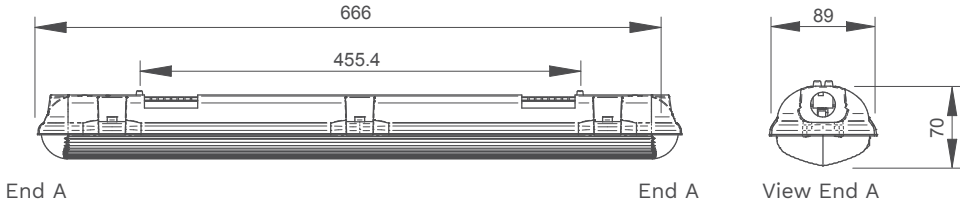

1200mm/4ft

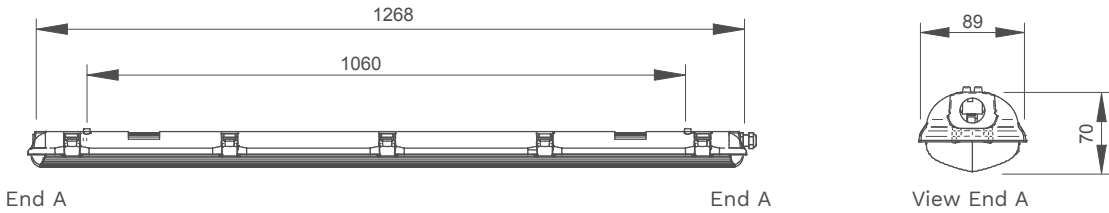

24V COMPONENTS

SYSTEM COMPONENTS	PART NUMBER
4M Extension cable	TEC24V-4M
6M Extension cable	TEC24V-6M
8M Extension cable	TEC24V-8M
Splitter Connector – 3 Way	TS24V-3
Splitter Connector – 4 Way	TS24V-4
Connector locking device	TLOCK
24V DC Power Supply 20A. WP with Hinged, Lockable Front Cover	TWPS24V20A

REPLACEMENT PARTS	
1196700	Power Supply, NDR-480

24V DC TEMPORARY POWER SUPPLY

PRODUCT INFORMATION	
Part Number	TWPS24V20A
Description	Temporary weatherproof 24V DC power supply, 20A IP65. Supplied with a short length flex and plug (output) for connection to the temporary lighting cabling system
Construction	Polycarbonate enclosure
Mounting	Surface mount
Dimensions L x W x H	300mm x 300mm x 180mm
Weight	5.7kg
Charging Method	Intelligent current limited constant voltage
Operating Voltage	240V AC; 50Hz
Rated Output Voltage	24V DC
Rated Output Current	20A (Max)
IP Rating	IP65
Operating Temperature	0°C to 40°C

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

SPACING TABLES

0.2 LX SPACING TABLES

Exit	175
Emergency	178
Batten	180


1 LX SPACING TABLES

Exit	183
Emergency	186
Batten	189

This spacing table data is for general information and should be read in conjunction with the Emergency Lighting Standard AS/NZS2293.1.

The spacings shown in these tables are for use in applications requiring either 0.2 lux or 1.0 lux (minimum) horizontal illumination. Any design for an emergency lighting system should be undertaken by a qualified person in accordance with the NCC (or in New Zealand the New Zealand Building Code F6 and F8) and AS/NZS2293.1.

Contact Clevertronics for further information and design support.

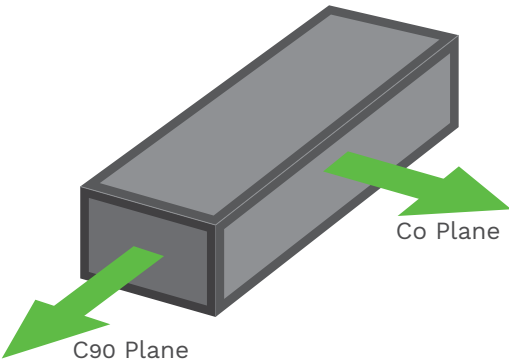

EXIT LUMINAIRES MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

CLEVERFIT EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6
	C90	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
AS/NZS 2293.1:2018	C0	E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0
	C90	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A

CLEVERFIT PRO

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
	C90	B16	6.4	6.8	7.2	7.6	7.9	8.2	8.6	9.0	9.3
AS/NZS 2293.1:2018	C0	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
	C90	B16	6.4	6.8	7.2	7.6	7.9	8.2	8.6	9.0	9.3

ULTRABLADE PRO SURFACE MOUNT EXIT & RECESSED EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E6.3	7.0	7.6	8.0	8.4	8.6	8.8	9.2	9.4	9.4
	C90	E5	6.6	7.2	7.4	7.8	8.0	8.2	8.4	8.4	8.2
AS/NZS 2293.1:2018	C0	E6.3	6.9	7.4	7.9	8.2	8.5	8.8	9.1	9.2	9.3
	C90	E5	6.6	7.0	7.4	7.7	7.9	8.1	8.2	8.2	8.0

BOXLITE EXIT CEILING MOUNT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
	C90	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
AS/NZS 2293.1:2018	C0	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
	C90	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0

BOXLITE EXIT WALL MOUNT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
	C90	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
AS/NZS 2293.1:2018	C0	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A
	C90	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A

JUMBO LED EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D6.3	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7
	C90	E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	5.8
AS/NZS 2293.1:2018	C0	D6.3	8.5	8.8	8.9	9.1	9.1	9.2	9.1	9.0	8.7
	C90	E3.2	5.8	6.1	6.4	6.5	6.6	6.6	6.4	0.0	0.0

GIGANTOR LED EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

WEATHERPROOF UNIVERSAL EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
	C90	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
AS/NZS 2293.1:2018	C0	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A
	C90	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

WEATHERPROOF WALL MOUNT EXIT 24M											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-
	C90	E1	3.8	3.6	3.2	3.6	-	-	-	-	-
AS/NZS 2293.1:2018	C0	E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A
	C90	E1	3.7	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A

WEATHERPROOF WALL MOUNT EXIT 40M											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-
AS/NZS 2293.1:2018	C0	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
	C90	E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A

LOW TEMPERATURE WALL MOUNT EXIT 24M											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
	C90	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
AS/NZS 2293.1:2018	C0	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
	C90	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

LOW TEMPERATURE UNIVERSAL EXIT 24M											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D2.5	5.8	5.8	5.7	5.6	5.4	5.1	4.5	-	-
	C90	E4	6.2	6.6	7.0	7.2	7.4	7.4	7.4	7.2	6.6
AS/NZS 2293.1:2018	C0	D2.5	5.8	5.8	5.7	5.6	5.3	0.0	0.0	0.0	N/A
	C90	E4	6.2	6.6	6.9	7.1	7.3	7.4	7.4	0.0	0.0

LOW TEMPERATURE WALL MOUNT EXIT 40M											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-
AS/NZS 2293.1:2018	C0	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
	C90	E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

VANDAL RESISTANT EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
	C90	E8	7.4	8.0	8.4	9.0	9.2	9.6	10.0	10.2	10.4
AS/NZS 2293.1:2018	C0	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
	C90	E8	7.3	7.9	8.4	8.8	9.2	9.5	9.9	10.2	10.4

CLEVEREVAC DYNAMIC EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6
	C90	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
AS/NZS 2293.1:2018	C0	E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0
	C90	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

CLEVEREVAC DYNAMIC BLADE EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3
	C0	E4	6.2	6.6	7.0	7.2	7.4	7.4	7.4	7.2	6.6
	C90	C25	9.4	10.0	10.5	11.0	11.5	11.9	12.4	12.9	13.4
	C90	C32	10.0	10.7	11.3	11.8	12.3	12.8	13.4	14.0	14.5
AS/NZS 2293.1:2018	C0	D5	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2
	C0	E4	6.2	6.8	6.9	7.1	7.3	7.4	7.4	0.0	0.0
	C90	C25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6
	C90	C32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

LIFELIGHT RECESSED & SURFACE MOUNT; INC WEATHERPROOF																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

LIFELIGHT IP44 RECESSED - L10 BATTERY																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

LIFELIGHT IP44 RECESSED - LP BATTERY																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

LIFELIGHT RECESSED & SURFACE MOUNT; INC CYLINDER & WEATHERPROOF																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

LIFELIGHT PRO WEATHERPROOF (REMOTE PACK)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8
	C90	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8

LIFELIGHT PRO WEATHERPROOF (INTEGRAL PACK)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

WEATHERPROOF EMERGENCY POD (LIFELIGHT)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

WEATHERPROOF EMERGENCY POD (LIFELIGHT PRO)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

CIRCLITE																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3
	C90	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3
AS/NZS 2293.1:2018	C0	D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3
	C90	D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

PREMIUM CIRCLITE																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGONAUT SQUARE																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

BUNKALITE																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

LOW TEMPERATURE EMERGENCY (-25C)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

ARGO WEATHERPROOF 600MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGO WEATHERPROOF 1200MM (EL)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGO WEATHERPROOF 1200MM (LP)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ARGONAUT PLUS 600MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGONAUT PLUS 1200MM & 1500MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ARGONAUT PLUS 600MM, 1200MM & 1500MM (POD)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D80	21.1	22	22.8	23.6	24.3	25	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
	C90	D80	21.1	22	22.8	23.6	24.3	25	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

ARGONAUT PRO 600MM, 1200MM & 1500MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

ARGONAUT PRO 600MM, 1200MM & 1500MM (POD)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

ARGONAUT VANDAL RESISTANT 600MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

ARGONAUT VANDAL RESISTANT 1200MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D100	22.7	23.7	24.6	25.5	26.3	27.0	27.9	28.9	29.8	31.4	32.7	33.7	34.6	35.3
	C90	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D100	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	31.3	32.6	33.7	34.5	35.2
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

EPIC 600MM& 1200MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

EPIC 1200MM (LP BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ODYSSEY QUANTUM DIFFUSED 600MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	C50	11.3	12	12.7	13.4	14.0	14.5	15.2	16.0	16.7	17.9	18.8	19.6	20.1	20.4
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	C50	11.3	12	12.7	13.4	14.0	14.5	15.2	16.0	16.7	17.9	18.8	19.6	20.1	20.4

ODYSSEY QUANTUM DIFFUSED 1200MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m
--	--	--	------	------	------	----	------	------	----	------	----	----	----	----	----

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

ODYSSEY QUANTUM DIFFUSED 600MM & 1200MM (POD)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ODYSSEY QUANTUM WIREGUARD 600MM & 1200MM																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

BARE EMERGENCY 600MM & 1200MM (EL & LP)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

BARE EMERGENCY 600MM & 1200MM (L10)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

CLEVERFIT EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E2.5	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

CLEVERFIT PRO											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	1.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	B16	4.0	4.2	4.3	4.3	4.3	4.2	4.0	3.3	2.2
AS/NZS 2293.1:2018	C0	D3.2	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	B16	4.1	4.2	4.3	4.4	4.3	4.3	4.1	0.0	0.0

ULTRABLADE PRO SURFACE MOUNT EXIT & RECESSED EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E6.3	4.1	4.0	3.6	2.6	1.6	N/A	N/A	N/A	N/A
	C90	E5	3.6	3.2	2.2	1.2	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E6.3	4.1	4.1	0.0	0.0	0.0	N/A	N/A	N/A	N/A
	C90	E5	3.7	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A

BOXLITE EXIT CEILING MOUNT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	1.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	D3.2	1.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D3.2	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	D3.2	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A

BOXLITE EXIT WALL MOUNT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

JUMBO LED EXIT											
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D6.3	3.9	3.7	3.3	2.4	1.5	N/A	N/A	N/A	N/A
	C90	E3.2	1.9	1.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D6.3	4.0	3.7	0.0	0.0	0.0	N/A	N/A	N/A	N/A
	C90	E3.2	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A

EXIT LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

GIGANTOR LED EXIT			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14	14.3	14.5
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14	14.3	14.5
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5

WEATHERPROOF UNIVERSAL EXIT			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

WEATHERPROOF WALL MOUNT EXIT 24M			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

WEATHERPROOF WALL MOUNT EXIT 40M			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

LOW TEMPERATURE WALL MOUNT EXIT 24M			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

LOW TEMPERATURE UNIVERSAL EXIT 24M			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D2.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E4	3.1	2.0	1.0	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D2.5	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E4	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

EXIT LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

LOW TEMPERATURE EXIT 40M			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

VANDAL RESISTANT EXIT			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	1.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E8	4.6	4.6	4.6	4.2	3.2	2.3	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D3.2	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E8	4.6	4.7	4.6	0.0	0.0	0.0	N/A	N/A	N/A

CLEVEREVAC DYNAMIC SURFACE EXIT			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	E2.5	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

CLEVEREVAC DYNAMIC BLADE EXIT			2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D5	3.3	3.0	2.0	1.1	N/A	N/A	N/A	N/A	N/A
	C0	E4	3.1	2.0	1.0	N/A	N/A	N/A	N/A	N/A	N/A
	C90	C25	5.8	6.0	6.2	6.4	6.4	6.5	6.4	6.3	6.0
	C90	C32	6.3	6.6	6.8	7.0	7.2	7.3	7.3	7.3	7.2
AS/NZS 2293.1:2018	C0	D5	3.4	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A
	C0	E4	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A
	C90	C25	5.9	6.1	6.3	6.4	6.5	6.5	6.5	6.3	6.0
	C90	C32	6.3	6.6	6.9	7.1	7.2	7.3	7.4	7.4	7.2

EMERGENCY LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

LIFELIGHT RECESSED & SURFACE MOUNT; INC WEATHERPROOF																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

LIFELIGHT RECESSED & SURFACE MOUNT; INC CYLINDER & WEATHERPROOF																	
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m	
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4	
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4	
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0	
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0	

LIFELIGHT IP44 RECESSED - L10 BATTERY																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

LIFELIGHT IP44 RECESSED - LP BATTERY																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

LIFELIGHT PRO WEATHERPROOF (REMOTE PACK)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

LIFELIGHT PRO WEATHERPROOF (INTEGRAL PACK)																	
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m	
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A	
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A	
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A	
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A	

EMERGENCY LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

WEATHERPROOF EMERGENCY POD (LIFELIGHT)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

Weatherproof Emergency Pod (Lifelight Pro)																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0

CIRCLITE																	
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m	
AS/NZS 2293.1:2005	C0	D32	8.5	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	4.7	N/A	N/A	N/A	
	C90	D32	8.5	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	4.7	N/A	N/A	N/A	
AS/NZS 2293.1:2018	C0	D32	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.8	0.0	0.0	N/A	N/A	N/A	
	C90	D32	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.8	0.0	0.0	N/A	N/A	N/A	

PREMIUM CIRCLITE																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	0.0	0.0	N/A

ARGONAUT SQUARE																	
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m	
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A	
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A	
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A	
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A	

BUNKALITE																
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

EMERGENCY LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

LOW TEMPERATURE EMERGENCY (-25C)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

LOW TEMPERATURE EMERGENCY (-40C)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D63	11	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0

BATTEN LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

ARGO WEATHERPROOF 600MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

ARGO WEATHERPROOF 1200MM (EL)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

ARGO WEATHERPROOF 1200MM (LP)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ARGONAUT PLUS 600MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

ARGONAUT PLUS 1200MM & 1500MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ARGONAUT PLUS 600MM, 1200MM & 1500MM (POD)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0

BATTEN LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

ARGONAUT PRO 600MM, 1200MM & 1500MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ARGONAUT PRO 600MM, 1200MM & 1500MM (POD)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0

ARGONAUT VANDAL RESISTANT 600MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D32	8.5	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	4.7	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D32	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.8	0.0	0.0	N/A	N/A	N/A

ARGONAUT VANDAL RESISTANT 1200MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D100	13.0	13.5	14.0	14.4	14.7	15.0	15.4	15.7	16.0	16.3	16.2	15.9	15.3	14.4
	C90	D50	10.1	10.5	10.8	11	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D100	11.5	13.2	14.0	14.4	14.8	15.1	15.4	15.8	16.0	16.3	16.3	16.0	15.4	14.4
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

EPIC 600MM& 1200MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

EPIC 1200MM (LP BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

BATTEN LUMINAIRES
MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

ODYSSEY DIFFUSED 600MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	C50	7.2	7.6	8.0	8.3	8.5	8.7	8.9	9.1	9.2	9.0	8.5	6.9	4.3	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	C50	7.3	7.7	8.0	8.3	8.6	8.8	9.0	9.1	9.2	9.1	8.6	0.0	0.0	N/A

ODYSSEY DIFFUSED 1200MM (INTEGRAL BATTERY)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D16	6.4	6.5	6.5	6.4	6.3	6.1	5.7	5.0	3.2	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D16	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0	N/A	N/A	N/A	N/A	N/A

ODYSSEY DIFFUSED 600MM & 1200MM (POD)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ODYSSEY WIREGUARD 600MM & 1200MM			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

BARE EMERGENCY 600MM & 1200MM (EL & LP)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

BARE EMERGENCY 600MM & 1200MM (L10)			2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS Standard	Orientation	Classification														
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0

Emergency Lighting Modes of Operation



The following table outlines the different modes that exit and emergency lighting fittings can operate in. Contact us if you would like some assistance in selecting the right mode for your application.

Emergency Operating Modes

Maintained

An emergency luminaire in which the lamp is energised at all times. The lamp is ON when there is power present and is ON during a power failure.



EXAMPLES: Exit signs. Single lamp fluoro battens used in plant rooms to function as both general lighting and the emergency lighting.





Non-Maintained

An emergency luminaire in which the lamp(s) are only in operation during a power fail.

EXAMPLE: Single lamp: Lifelight emergency luminaires.




EXAMPLE: Twin lamp: Supalite floods, often used in factory units and only operate in the event of a power fail.



Sustained

An emergency luminaire typically containing two lamps, one of which is in operation while there is power present, and the other “non-maintained” lamp only energised during a power fail. Also known as Combined Non-Maintained.

EXAMPLE 1: LED TUBE or LED strip batten with separate dedicated LED emergency pod.



EXAMPLE 2: LED Strip batten with dedicated separate internal LED's with emergency battery back up.



Chemical Resistance Table

Construction Materials	Body	Diffuser
Argonaut Quantum	PC	PC
Argonaut	PC	PC
Argonaut PRO	GRP	PC or Acrylic

● Resistant
■ Semi-resistant
✗ Not resistant
Ambient temperature at 20°C

Chemical Specifics	Polycarbonate (PC)	Acrylic (PMMA)	Glass Fibre Reinforced Plastic (GRP)
Accumulator acid	■	●	●
Acetic acid <15%	●	●	●
Alcohol <30%	●	●	●
Alcohol concentrate	●	✗	✗
Ammonia <25%	■	●	■
Aromatic hydrocarbons	■	●	■
Benzene	✗	✗	■
Carbon dioxide	●	●	●
Carbon monoxide	●	●	●
Carbon tetrachloride	●	■	■
Caustic soda <2%	✗	●	■
Common salt (Sodium chloride)	■	●	●
Cooking oil (Animal fat – but not pork)	✗	●	●
Cooking oil (Cold)	●	●	●
Cooking oil (Hot)	✗	●	●
Cooking oil (Pork fat)	✗	●	●
Cooking oil (Vegetable)	✗	●	●
Crude oil	■	●	●
Diesel oil	■	●	●
Ethyl Acetate	●	✗	✗
Glycerine	■	●	●
Glycol	●	●	●
Hydrocarbons	■	■	■
Hydrochloric acid <10%	●	●	●
Hydrogen peroxide <40%	■	●	✗
Hydrogen sulphide	●	●	●
Kerosene/paraffin oil	✗	●	●
Ketones	●	✗	✗
Methanol	●	✗	✗
Milk of lime (Limewater)	■	●	●
Nitric acid <5%	●	●	●
Nitric acid <30%	■	■	■
Oil (Hydraulic)	✗	●	●
Oil (Lubricating)	✗	●	●
Oil based paint	✗	●	●
Petrol	●	●	●
Pyridine	●	✗	✗
Sea water	●	●	●
Soap suds	■	●	●
Soda	●	●	●
Sulphuric acid <30%	●	●	●
Sulphuric acid concentrate	✗	✗	■
Sulphurous acid <5%	✗	●	■
Synthetic detergent	●	●	●
Turpentine	●	●	●

I'm responsible for a smart emergency lighting system – what are some important things I need to know?

Once a construction or refurbishment has been completed and the defects period is over, the installation team including the builder and installing contractor will move on and leave the ongoing maintenance to a new party. If this is you, you'll need to know what you've got and how to ensure its performance.

Repairs and replacements

In years to come, when the system reports what replacements are required, the availability and backwards compatibility of new fittings and components will be vital. If today's system is upgraded, it is especially important to ensure the system manufacturer has a history of supporting product into the future.

Latest software

Speaking of sophisticated reporting, the smart generation of emergency lighting systems can be updated remotely by the manufacturer. Regular firmware updates will ensure your system operates with the latest tools and ensure your system is current.

Training and support

Getting to know the system you've inherited can be a challenge if there's a lack of local support. Leading providers will have free training that accompanies the system - not who bought or designed it. In this way, essential training and information will be proactively delivered to you. Emergency lighting systems must perform when needed so local support is a critical part of the package.

Leading the way

If you're looking at a Clevertronics system, then you're in luck because our Advantage Lifetime Support (ALS) programme is an integral part of any Zoneworks XT system regardless of who's responsible for it.

Clevertronics proactively ensures training happens and systems are reliable, current and scalable. We leave the maintenance to you, but help you get the most out of your system with full training and support.

How often should emergency lighting be tested and what impact does incorrect testing have on battery life?

Twice a year. Testing and the required repairs or replacements are required to be carried out at intervals **no greater than 6 months**. The inspection and maintenance procedures are detailed in AS/NZS 2293 Part 2, but basically involves a **discharge duration test** and inspection to identify fittings that require maintenance.

The **discharge test** involves simulating a power fail and can be manually initiated via a test switch/timer at the switchboard, or automatically initiated by self-testing fittings or computerised testing systems which provide detailed reporting and maintenance records.

Battery life

It is not so much "incorrect testing" that will shorten the life of a battery. Nickel Cadmium (NiCd) and Nickel Metal Hydride (NiMH) batteries should be discharged to full cut-out to maximise the calendar life of the battery, because partial or shallow discharging of these types of batteries result in a **memory effect** - a faster loss of capacity over time.

Lithium Ion batteries do not suffer from a memory effect and also can be discharged many more times without affecting the life of the battery. The Lithium Iron Phosphate and Lithium Nanophosphate battery technology in Clevertronics fittings benefit from these and many other advantages against the older NiCd and NiMH battery technology.

What are the best lithium batteries for emergency lighting?


Not all Lithium Ion batteries are the same or perform in the same way as different applications prioritise different performance characteristics. For emergency lighting, the three main priorities are Safety, Performance and Environmental Impact.

Here's four widely used but different Lithium Ion technologies:

- Lithium Cobalt Oxide (LCO): Very high energy density makes it small and light for mobile phones, laptops and digital cameras. The downside is poor thermal stability and can vent with flame under abuse, short-circuit or thermal runaway. Less harmful to the environment than Nickel Cadmium but contains toxic heavy metals.
- Lithium Nickel Manganese Cobalt Oxide (NMC): A newer technology variant of LCO with high energy density but improved thermal stability. Will vent with flame but at a higher temperature trigger point. Rapidly gaining uptake in electric vehicles and other larger format applications. Also cheap but contains toxic heavy metals.
- Lithium Iron Phosphate (LFP): Slightly lower energy density but significantly higher thermal stability and will not vent with flame. Lower capacity loss over time has made it popular for large format energy storage applications, electric vehicles and portable power tools. No toxic heavy metals.
- Lithium Nanophosphate (LNP): A variant on LFP with even better thermal stability and lower capacity loss over time at full state of charge at elevated temperatures. Used in large format energy storage, electric vehicles and high-end power tools. No toxic heavy metals or carcinogens.

There is significant variance in the manufacturing quality of lithium batteries, so choose products from a reputable supplier with a track record for quality and the data to back it up. In the real world, L10 products have delivered in the field since their introduction in 2012. The inherent safety and performance over time at full state of charge make LFP and LNP the superior choice for our products, and with the lowest environmental impact.

At Clevertronics we select the highest quality LFP batteries for our LP range, and our L10 Optimum range leads the market using Lithium Nanophosphate technology (LNP).

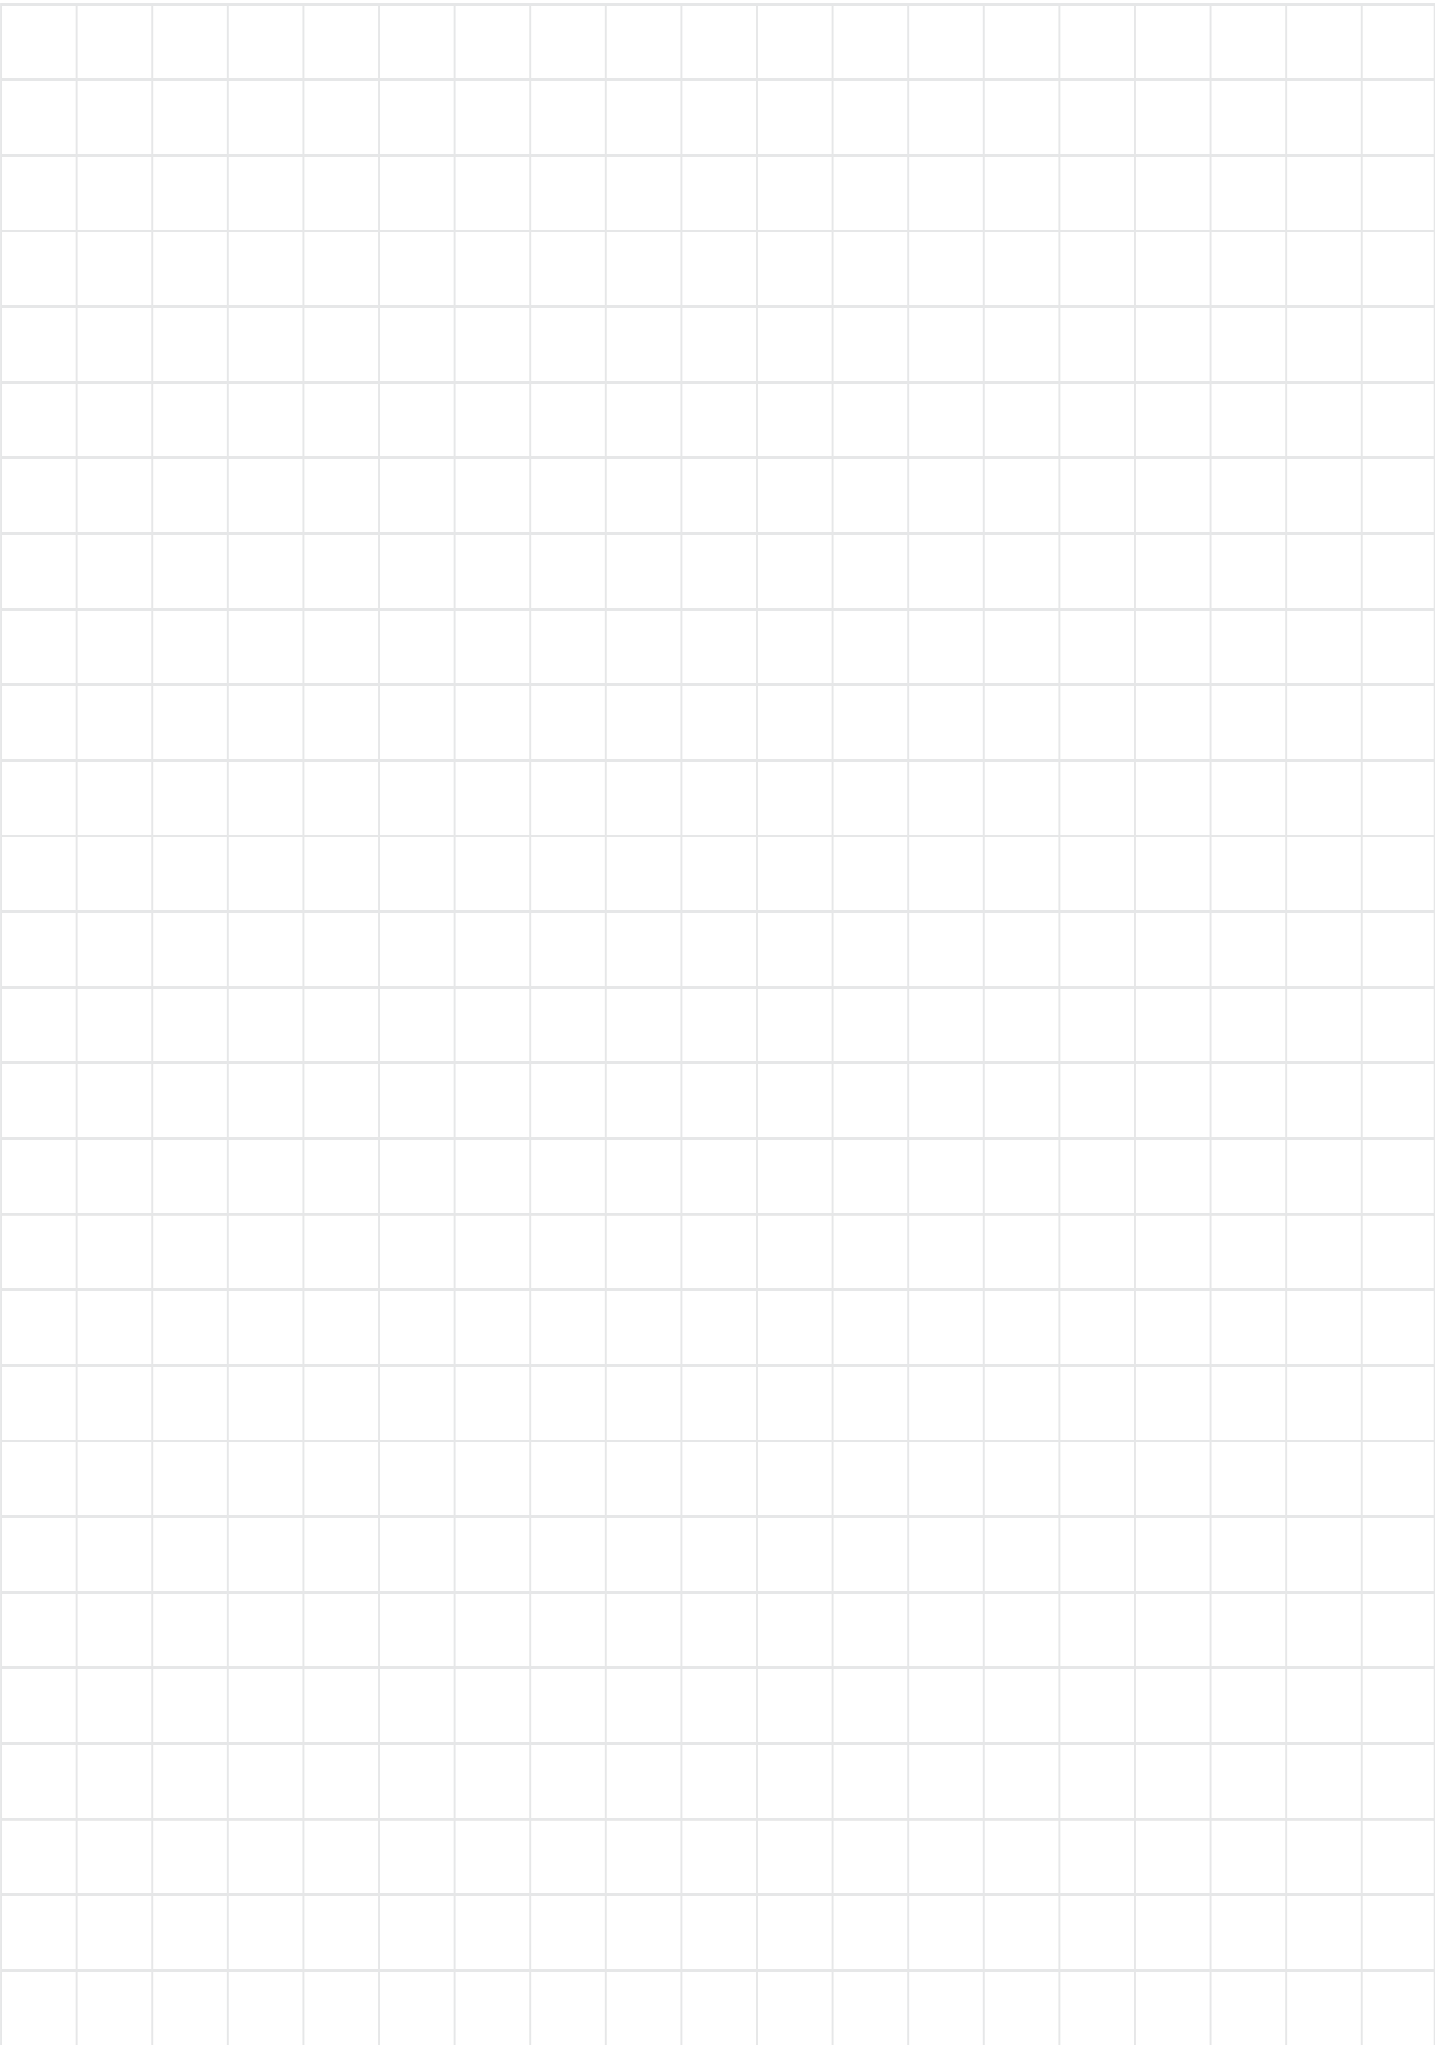

Victoria

1 Caribbean Drive
Scoresby VIC 3179
Phone: +61 3 9559 2700
Fax: +61 3 9559 2799
Email: statemgrvic@clevertronics.com.au

New South Wales

9 Distribution Place
Seven Hills NSW 2147
Phone: +61 2 8805 6400
Fax: +61 2 8805 6444
Email: statemgrnsw@clevertronics.com.au

Queensland

2/8-12 Monte-Khoury Drive
Loganholme QLD 4129
Phone: +61 7 3442 9700
Fax: +61 7 3442 9777
Email: statemgrqld@clevertronics.com.au

Western Australia

12 Milly Court
Malaga WA 6090
Phone: +61 8 9207 0000
Fax: +61 8 9248 3725
Email: statemgrwa@clevertronics.com.au

South Australia

U2/19 Main Terrace
Richmond SA 5033
Phone: +61 8 8301 8800
Fax: +61 8 8351 8286
Email: statemgrsa@clevertronics.com.au

Auckland

Unit 22/761 Great South Road
Penrose Auckland 1061
Phone: +64 800 548 448
Email: info@clevertronics.co.nz

Christchurch

163C Wordsworth Street
Sydenham Christchurch 8023
Phone: +64 800 548 448
Email: info@clevertronics.co.nz

clevertronics.com.au

clevertronics.co.nz