

SPACING TABLES

0.2 LX SPACING TABLES

Exit
Emergency
Batten


1 LX SPACING TABLES

Exit
Emergency
Batten

This spacing table data is for general information and should be read in conjunction with the Emergency Lighting Standard AS/NZS2293.1.

The spacings shown in these tables are for use in applications requiring either 0.2 lux or 1.0 lux (minimum) horizontal illumination. Any design for an emergency lighting system should be undertaken by a qualified person in accordance with the NCC (or in New Zealand the New Zealand Building Code F6 and F8) and AS/NZS2293.1.

Contact Clevertronics for further information and design support.

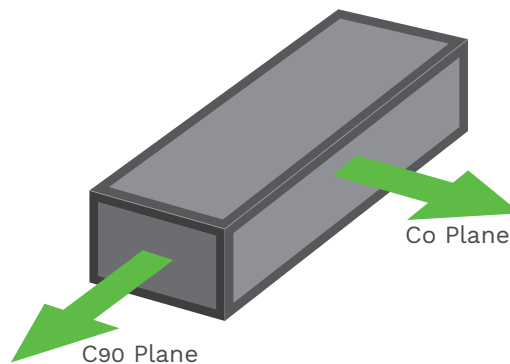

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

CLEVERFIT EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6
	C90	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
AS/NZS 2293.1:2018	C0	E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0
	C90	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A

CLEVERFIT PRO

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
	C90	B16	6.4	6.8	7.2	7.6	7.9	8.2	8.6	9.0	9.3
AS/NZS 2293.1:2018	C0	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
	C90	B16	6.4	6.8	7.2	7.6	7.9	8.2	8.6	9.0	9.3

ULTRABLADE PRO SURFACE MOUNT EXIT & RECESSED EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E6.3	7.0	7.6	8.0	8.4	8.6	8.8	9.2	9.4	9.4
	C90	E5	6.6	7.2	7.4	7.8	8.0	8.2	8.4	8.4	8.2
AS/NZS 2293.1:2018	C0	E6.3	6.9	7.4	7.9	8.2	8.5	8.8	9.1	9.2	9.3
	C90	E5	6.6	7.0	7.4	7.7	7.9	8.1	8.2	8.2	8.0

BOXLITE EXIT CEILING MOUNT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
	C90	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
AS/NZS 2293.1:2018	C0	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
	C90	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0

BOXLITE EXIT WALL MOUNT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
	C90	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
AS/NZS 2293.1:2018	C0	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A
	C90	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A

JUMBO LED EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D6.3	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7
	C90	E3.2	6.0	6.2	6.4	6.6	6.6	6.6	6.6	5.8	5.8
AS/NZS 2293.1:2018	C0	D6.3	8.5	8.8	8.9	9.1	9.1	9.2	9.1	9.0	8.7
	C90	E3.2	5.8	6.1	6.4	6.5	6.6	6.6	6.4	0.0	0.0

GIGANTOR LED EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

WEATHERPROOF UNIVERSAL EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	-
	C90	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
AS/NZS 2293.1:2018	C0	E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	N/A
	C90	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

WEATHERPROOF WALL MOUNT EXIT 24M

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-
	C90	E1	3.8	3.6	3.2	3.6	-	-	-	-	-
AS/NZS 2293.1:2018	C0	E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A
	C90	E1	3.7	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A

WEATHERPROOF WALL MOUNT EXIT 40M

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-
AS/NZS 2293.1:2018	C0	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
	C90	E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A

LOW TEMPERATURE WALL MOUNT EXIT 24M

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
	C90	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
AS/NZS 2293.1:2018	C0	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
	C90	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

LOW TEMPERATURE UNIVERSAL EXIT 24M

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D2.5	5.8	5.8	5.7	5.6	5.4	5.1	4.5	-	-
	C90	E4	6.2	6.6	7.0	7.2	7.4	7.4	7.4	7.2	6.6
AS/NZS 2293.1:2018	C0	D2.5	5.8	5.8	5.7	5.6	5.3	0.0	0.0	0.0	N/A
	C90	E4	6.2	6.6	6.9	7.1	7.3	7.4	7.4	0.0	0.0

LOW TEMPERATURE WALL MOUNT EXIT 40M

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0	-	-	-
AS/NZS 2293.1:2018	C0	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
	C90	E1.25	4.1	4.1	0.0	0.0	0.0	0.0	N/A	N/A	N/A

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

VANDAL RESISTANT EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D3.2	6.5	6.6	6.6	6.5	6.4	6.2	5.8	5.1	4.1
	C90	E8	7.4	8.0	8.4	9.0	9.2	9.6	10.0	10.2	10.4
AS/NZS 2293.1:2018	C0	D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0
	C90	E8	7.3	7.9	8.4	8.8	9.2	9.5	9.9	10.2	10.4

CLEVEREVAC DYNAMIC EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6
	C90	E1.6	4.8	4.8	4.8	4.4	4.0	4.2	3.8	-	-
AS/NZS 2293.1:2018	C0	E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0	0.0
	C90	E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A

CLEVEREVAC DYNAMIC BLADE EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	C0	D5	7.8	8.0	8.1	8.2	8.2	8.2	8.0	7.7	7.3
	C0	E4	6.2	6.6	7.0	7.2	7.4	7.4	7.4	7.2	6.6
	C90	C25	9.4	10.0	10.5	11.0	11.5	11.9	12.4	12.9	13.4
	C90	C32	10.0	10.7	11.3	11.8	12.3	12.8	13.4	14.0	14.5
AS/NZS 2293.1:2018	C0	D5	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2
	C0	E4	6.2	6.8	6.9	7.1	7.3	7.4	7.4	0.0	0.0
	C90	C25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6
	C90	C32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

LIFELIGHT RECESSED & SURFACE MOUNT; INC WEATHERPROOF

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

LIFELIGHT IP44 RECESSED - L10 BATTERY

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

LIFELIGHT IP44 RECESSED - LP BATTERY

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

LIFELIGHT RECESSED & SURFACE MOUNT; INC CYLINDER & WEATHERPROOF

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

LIFELIGHT PRO WEATHERPROOF (REMOTE PACK)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8
	C90	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8

LIFELIGHT PRO WEATHERPROOF (INTEGRAL PACK)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

WEATHERPROOF EMERGENCY POD (LIFELIGHT)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

WEATHERPROOF EMERGENCY POD (LIFELIGHT PRO)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

CIRCLITE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3
	C90	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3
AS/NZS 2293.1:2018	C0	D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3
	C90	D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

PREMIUM CIRCLITE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGONAUT SQUARE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

BUNKALITE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

LOW TEMPERATURE EMERGENCY (-25C)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D50	18	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

LOW TEMPERATURE EMERGENCY (-40C)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8
	C90	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

ARGO WEATHERPROOF 600MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	CO	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGO WEATHERPROOF 1200MM (EL)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	CO	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGO WEATHERPROOF 1200MM (LP)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	CO	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ARGONAUT PLUS 600MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	CO	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

ARGONAUT PLUS 1200MM & 1500MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	CO	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ARGONAUT PLUS 600MM, 1200MM & 1500MM (POD)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D80	21.1	22	22.8	23.6	24.3	25	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
	C90	D80	21.1	22	22.8	23.6	24.3	25	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
AS/NZS 2293.1:2018	CO	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

ARGONAUT PRO 600MM, 1200MM & 1500MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	CO	D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

BATTEN LUMINAIRE

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

ARGONAUT PRO 600MM, 1200MM & 1500MM (POD)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30.0	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

ARGONAUT VANDAL RESISTANT 600MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D32	11.5	13.2	14.8	16.5	17.6	18.0	18.5	19.0	19.5	20.1	20.5	20.7	20.6	20.3

ARGONAUT VANDAL RESISTANT 1200MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D100	22.7	23.7	24.6	25.5	26.3	27.0	27.9	28.9	29.8	31.4	32.7	33.7	34.6	35.3
	C90	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
AS/NZS 2293.1:2018	C0	D100	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	31.3	32.6	33.7	34.5	35.2
	C90	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

EPIC 600MM & 1200MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	17.8	17.2

EPIC 1200MM (LP BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	19.4	20.3	21.1	21.8	22.4	23	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D63	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.5	25.2	26.4	27.3	28.0	28.5	28.8
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ODYSSEY QUANTUM DIFFUSED 600MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	C50	11.3	12	12.7	13.4	14.0	14.5	15.2	16.0	16.7	17.9	18.8	19.6	20.1	20.4
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	C50	11.3	12	12.7	13.4	14.0	14.5	15.2	16.0	16.7	17.9	18.8	19.6	20.1	20.4

ODYSSEY QUANTUM DIFFUSED 1200MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9
	C90	D16	12.1	12.6	13.0	13.3	13.6	13.9	14.1	14.6	14.6	14.4	13.8	12.9	11.5	
AS/NZS 2293.1:2018	C0	D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8
	C90	D16	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 0.2 LX)

0.2 lx

ODYSSEY QUANTUM DIFFUSED 600MM & 1200MM (POD)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

ODYSSEY QUANTUM WIREGUARD 600MM & 1200MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

BARE EMERGENCY 600MM & 1200MM (EL & LP)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
	C90	D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1
AS/NZS 2293.1:2018	C0	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0
	C90	D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

BARE EMERGENCY 600MM & 1200MM (L10)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
	C90	D80	21.1	22.0	22.8	23.6	24.3	25.0	25.8	26.7	27.5	28.9	30	30.9	31.6	32.1
AS/NZS 2293.1:2018	C0	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1
	C90	D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

EXIT LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

LOW TEMPERATURE EXIT 40M

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	CO	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	CO	E1.25	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

VANDAL RESISTANT EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	CO	D3.2	1.8	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E8	4.6	4.6	4.6	4.2	3.2	2.3	N/A	N/A	N/A
AS/NZS 2293.1:2018	CO	D3.2	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E8	4.6	4.7	4.6	0.0	0.0	0.0	N/A	N/A	N/A

CLEVEREVAC DYNAMIC SURFACE EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	CO	E2.5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	CO	E2.5	0.0	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	C90	E1.6	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

CLEVEREVAC DYNAMIC BLADE EXIT

AS/NZS Standard	Orientation	Classification	2.1M	2.4M	2.7M	3M	3.3M	3.6M	4M	4.5M	5M
AS/NZS 2293.1:2005	CO	D5	3.3	3.0	2.0	1.1	N/A	N/A	N/A	N/A	N/A
	CO	E4	3.1	2.0	1.0	N/A	N/A	N/A	N/A	N/A	N/A
	C90	C25	5.8	6.0	6.2	6.4	6.4	6.5	6.4	6.3	6.0
	C90	C32	6.3	6.6	6.8	7.0	7.2	7.3	7.3	7.3	7.2
AS/NZS 2293.1:2018	CO	D5	3.4	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A
	CO	E4	0.0	0.0	0.0	N/A	N/A	N/A	N/A	N/A	N/A
	C90	C25	5.9	6.1	6.3	6.4	6.5	6.5	6.5	6.3	6.0
	C90	C32	6.3	6.6	6.9	7.1	7.2	7.3	7.4	7.4	7.2

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

LIFELIGHT RECESSED & SURFACE MOUNT; INC WEATHERPROOF

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

LIFELIGHT RECESSED & SURFACE MOUNT; INC CYLINDER & WEATHERPROOF

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0

LIFELIGHT IP44 RECESSED - L10 BATTERY

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

LIFELIGHT IP44 RECESSED - LP BATTERY

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

LIFELIGHT PRO WEATHERPROOF (REMOTE PACK)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

LIFELIGHT PRO WEATHERPROOF (INTEGRAL PACK)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

WEATHERPROOF EMERGENCY POD (LIFELIGHT)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	CO	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

WEATHERPROOF EMERGENCY POD (LIFELIGHT PRO)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	CO	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.8	14.5	14.6	14.4	13.8	0.0	0.0

CIRCLITE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D32	8.5	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	4.7	N/A	N/A	N/A
	C90	D32	8.5	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	4.7	N/A	N/A	N/A
AS/NZS 2293.1:2018	CO	D32	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.8	0.0	0.0	N/A	N/A	N/A
	C90	D32	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.8	0.0	0.0	N/A	N/A	N/A

PREMIUM CIRCLITE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	CO	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	0.0	0.0	N/A

ARGONAUT SQUARE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	CO	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

BUNKALITE

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	CO	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	CO	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

EMERGENCY LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

LOW TEMPERATURE EMERGENCY (-25C)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

LOW TEMPERATURE EMERGENCY (-40C)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D63	11	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

ARGO WEATHERPROOF 600MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

ARGO WEATHERPROOF 1200MM (EL)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

ARGO WEATHERPROOF 1200MM (LP)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ARGONAUT PLUS 600MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8.0	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

ARGONAUT PLUS 1200MM & 1500MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ARGONAUT PLUS 600MM, 1200MM & 1500MM (POD)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

ARGONAUT PRO 600MM, 1200MM & 1500MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ARGONAUT PRO 600MM, 1200MM & 1500MM (POD)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0

ARGONAUT VANDAL RESISTANT 600MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D32	8.5	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.7	7.7	4.7	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D32	8.6	8.8	9.0	9.1	9.2	9.2	9.2	9.0	8.8	0.0	0.0	N/A	N/A	N/A

ARGONAUT VANDAL RESISTANT 1200MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D100	13.0	13.5	14.0	14.4	14.7	15.0	15.4	15.7	16.0	16.3	16.2	15.9	15.3	14.4
	C90	D50	10.1	10.5	10.8	11	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
AS/NZS 2293.1:2018	C0	D100	11.5	13.2	14.0	14.4	14.8	15.1	15.4	15.8	16.0	16.3	16.3	16.0	15.4	14.4
	C90	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A

EPIC 600MM& 1200MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D25	7.7	7.9	8	8.1	8.1	8.1	7.9	7.6	7.2	4.8	1.1	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D25	7.8	8.0	8.1	8.2	8.2	8.1	8.0	7.7	7.2	0.0	0.0	N/A	N/A	N/A

EPIC 1200MM (LP BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D63	11.0	11.4	11.8	12.1	12.3	12.5	12.7	12.8	12.9	12.8	12.2	11.3	9.6	6.1
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D63	11.1	11.5	11.8	12.1	12.3	12.5	12.7	12.9	13.0	12.8	12.3	0.0	0.0	0.0
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

BATTEN LUMINAIRES

MAXIMUM SPACING AND MOUNTING HEIGHTS (BASED ON 1 LX)

1 lx

ODYSSEY DIFFUSED 600MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	C50	7.2	7.6	8.0	8.3	8.5	8.7	8.9	9.1	9.2	9.0	8.5	6.9	4.3	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	C50	7.3	7.7	8.0	8.3	8.6	8.8	9.0	9.1	9.2	9.1	8.6	0.0	0.0	N/A

ODYSSEY DIFFUSED 1200MM (INTEGRAL BATTERY)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D50	10.1	10.5	10.8	11.0	11.2	11.3	11.4	11.5	11.5	11.1	10.2	8.6	5.2	N/A
	C90	D16	6.4	6.5	6.5	6.4	6.3	6.1	5.7	5.0	3.2	N/A	N/A	N/A	N/A	N/A
AS/NZS 2293.1:2018	C0	D50	10.2	10.5	10.8	11.0	11.2	11.4	11.5	11.5	11.5	11.1	10.3	0.0	0.0	N/A
	C90	D16	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0	N/A	N/A	N/A	N/A	N/A

ODYSSEY DIFFUSED 600MM & 1200MM (POD)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

ODYSSEY WIREGUARD 600MM & 1200MM

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

BARE EMERGENCY 600MM & 1200MM (EL & LP)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
	C90	D40	9.3	9.6	9.8	10.0	10.1	10.2	10.3	10.2	10.1	9.4	8.2	4.8	N/A	N/A
AS/NZS 2293.1:2018	C0	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A
	C90	D40	9.4	9.7	9.9	10.1	10.2	10.3	10.3	10.3	10.1	9.5	0.0	0.0	N/A	N/A

BARE EMERGENCY 600MM & 1200MM (L10)

AS/NZS Standard	Orientation	Classification	2.1m	2.4m	2.7m	3m	3.3m	3.6m	4m	4.5m	5m	6m	7m	8m	9m	10m
AS/NZS 2293.1:2005	C0	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
	C90	D80	12.0	12.5	12.9	13.2	13.5	13.8	14.0	14.3	14.5	14.5	14.3	13.7	12.8	11.4
AS/NZS 2293.1:2018	C0	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0
	C90	D80	11.5	12.5	12.9	13.3	13.6	13.8	14.1	14.4	14.5	14.6	14.4	13.8	0.0	0.0