
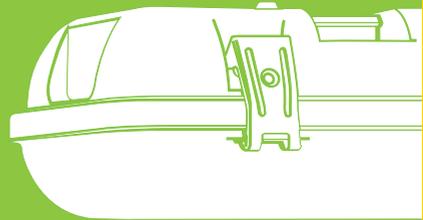
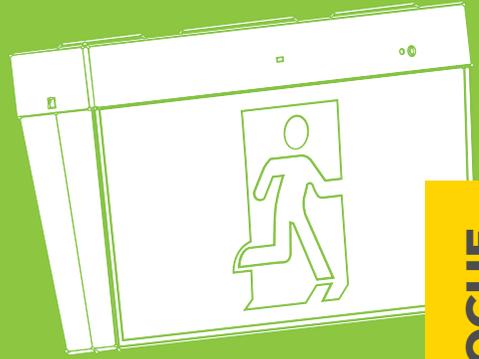


TRADE

S E R I E S

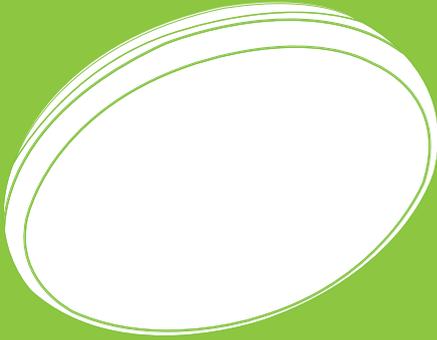

PRODUCT CATALOGUE

THE TRADIES CHOICE

 Clevertronics

SPIRIT EXIT



Economy LED Exit Suitable for All Applications

The Spirit Exit is an economic and reliable exit that includes all directions inserts for single or double-sided installations.

The Spirit is easy to install using the quick connect bracket and can be either wall or ceiling mounted.



Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.3W standby power consumption
- Wall and ceiling mount with easy slide connect
- All directional decals in one box
- Lithium Iron Phosphate battery



TRADE SERIES

Applications

- Office Buildings
- Schools
- Factories
- Retail Outlets
- Car Parks

ORDERING INFORMATION

Part Number	SPIRIT
Carton Quantity	5 pieces
Weight - Unit (Carton)	1.0kg (5kg)
Dimensions (L x W x H)	352mm x 80mm x 200mm
Directional Options	All Directional Inserts Included

POWER, LAMPS AND BATTERY

Power Consumption (Standby / Max)	1.3W / 2.5W
Lamp(s)	50,000 Hour LEDs
Battery	Lithium Iron Phosphate
Voltage (V)/Milliamp Per Hour (mAh)	3.2V / 500mAh
Charging Method	Intelligent Current Limited Constant Voltage

AS/NZS 2293 CLASSIFICATION

C0	E2.5
C90	D2.5

SPACING TABLE AND MOUNTING HEIGHTS - AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	5.0m
E2.5	5.4	5.6	5.8	5.8	5.8	0.0	0.0	0.0
D2.5	5.8	5.8	5.7	5.6	5.3	0.0	0.0	N/A

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction- Body/Diffuser	PC / PP
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C

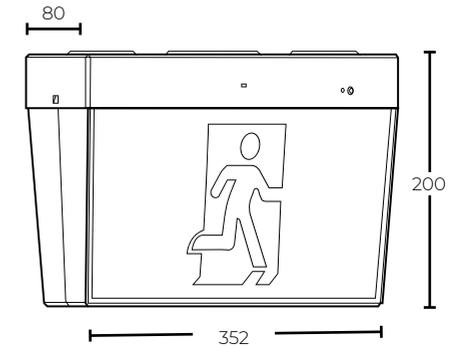

Dimensions (mm)

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

CLEVERFIT EXIT



Premium Economy LED Exit Suitable for All Applications

The Cleverfit Exit is a proven market leader that is known for its reliability, energy efficiency and ease of installation. The tamper resistant cover makes it possible to include all diffuser combinations in one box for single or double sided applications.

The Cleverfit can be either wall or ceiling mounted and the quick connect bracket makes installation nice and easy.

TRADE SERIES

Applications

-  Office Buildings
-  Schools
-  Factories
-  Retail Outlets
-  Car Parks
-  Theatres

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.1W standby power consumption
- Wall and ceiling mount with easy slide connect
- All directional decals in one box
- Lithium Iron Phosphate battery
- Theatre version available*



ORDERING INFORMATION

Part Number	ECFLED-LI
Carton Quantity	5 pieces
Weight - Unit (Carton)	1.2kg (6kg)
Dimensions (L x W x H)	355mm x 80mm x 215mm
Directional Options	All Directional Inserts Included (Excluding theatre versions)

ACCESSORIES

Cantilever Bracket	CLVRBRT-CF-WP
Wireguard (Wall Mount)	2530050
Wireguard (Ceiling Mount)	2530110
Boxlite Cover Plate	3542250

POWER, LAMPS AND BATTERY

Power Consumption (Standby / Max)	1.1W / 2.0W
Lamp(s)	50,000 Hour LEDs
Battery	Lithium Iron Phosphate
Voltage (V)/Milliamp Per Hour (mAh)	3.2V / 600mAh
Charging Method	Intelligent Current Limited Constant Voltage

AS/NZS 2293 CLASSIFICATION

C0	E2
C90	E2

SPACING TABLE AND MOUNTING HEIGHTS - AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	5.0m
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	N/A

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction- Body/Diffuser	ABS / PC
Viewing Distance	24m
Mounting Type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20 (Weatherproof Version Available)

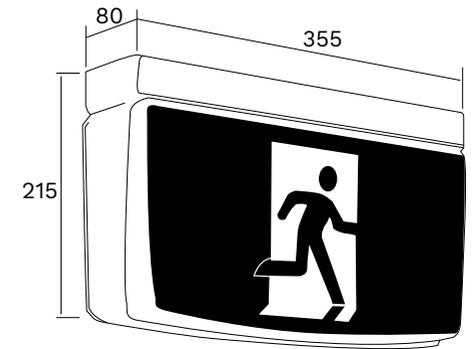

Dimensions (mm)

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

* For additional variants please refer to the Clevertronics Product Guide or website.

ULTRABLADE PRO SURFACE MOUNT EXIT



Premium Economy Surface Mounted Architectural Blade Exit

The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium surface mounted exit.

With a reduced reflection, halo effect on the diffuser with a decal that is scratch and fingerprint resistant, it is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.

Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.8W standby power consumption
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate battery



TRADE SERIES

Applications

- Office Buildings
- Shopping Centres
- Galleries
- Retail Outlets
- Theatres
- Apartments

ORDERING INFORMATION

Part Number	EUBPRO-SM-LI
Carton Quantity	5
Weight - Unit (Carton)	1.0kg (5kg)
Dimensions (L x W x H)	317mm x 8.7mm x 157mm - Blade Assembly 360mm x 47mm x 72mm - Base
Directional Options	All Directional Inserts Included

AS/NZS 2293 CLASSIFICATION

C0	E6.3
C90	E6.3

POWER, LAMPS AND BATTERY

Power Consumption (Standby / Max)	1.8W / 2.8W
Lamp(s)	50,000 Hour LED
Battery	Lithium Iron Phosphate
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 1100mAh
Charging Method	Intelligent Current Limited Constant Voltage

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E6.3	6.9	7.4	7.9	8.2	8.5	8.8	9.1	9.2	9.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body/Diffuser	PC-ABS / PC
Viewing Distance	24m
Mounting Type	Single and Double Sided
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20



Dimensions (mm)

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ULTRABLADE PRO RECESSED EXIT



Premium Economy Recessed Architectural Blade Exit

The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium recessed exit.

With its low profile design, only 80mm of ceiling space is required during installation, combine this with a reduced reflection and halo effect on the diffuser and a decal that is scratch and fingerprint resistant. It is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.



Features and Benefits

- AS/NZS 2293.3 compliant
- Low 1.8W standby power consumption
- Recessed mount
- All directional decals in one box
- Lithium Iron Phosphate battery



TRADE SERIES

Applications

- Office Buildings
- Shopping Centres
- Galleries
- Retail Outlets
- Theatres
- Apartments

ORDERING INFORMATION

Part Number	EUBPRO-LI
Carton Quantity	5
Weight - Unit (Carton)	1.1kg (5.5kg)
Dimensions (L x W x H)	317mm x 8.7mm x 157mm - Blade Assembly 385mm x 67mm - Cover Plate 350mm x 48mm - Ceiling Cutout
Directional Options	All Directional Inserts Included

ACCESSORIES

Mounting Adaptor for Ultrablade	2740054
---------------------------------	---------

POWER, LAMPS AND BATTERY

Power Consumption (Standby / Max)	1.8W / 2.8W
Lamp(s)	50,000 Hour LED
Battery	Lithium Iron Phosphate
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 1100mAh
Charging Method	Intelligent Current Limited Constant Voltage

AS/NZS 2293 CLASSIFICATION

C0	E5
C90	E5

SPACING TABLE AND MOUNTING HEIGHTS - AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E5	6.6	7	7.4	7.7	7.9	8.1	8.2	8.2	8.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body/Diffuser	PC-ABS / PC
Viewing Distance	24m
Mounting Type	Single and Double Sided
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

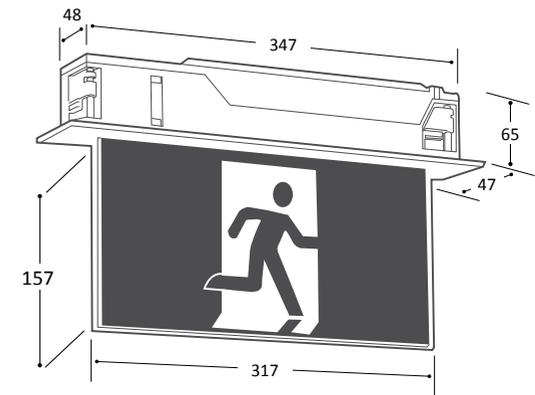

Dimensions (mm)

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. Spacing classifications do not apply for theatre versions.

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

BOXLITE EXIT



Conventional Economy Exit for Quick Retrofits

The Boxlite is a conventional style LED exit with a detachable base plate that makes retrofitting on existing sites easy work.

Available as a wall or ceiling mount and supplied with all diffuser combinations in each box.

TRADE SERIES

Applications

-  Office Buildings
-  Schools
-  Factories
-  Retail Outlets
-  Car Parks
-  Apartments

Features and Benefits

- AS/NZS 2293.3 compliant
- Wall or ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate battery



ORDERING INFORMATION	ECONOMY CEILING MOUNT	ECONOMY WALL MOUNT
Part Number	EBLLED-CM-LI	EBLLED-WM-LI
Carton Quantity	5	
Weight - Unit (Carton)	1.5kg (7.5kg)	
Dimensions (L x W x H)	375mm x 160mm x 240mm	375mm X 105mm X 160mm
Directional Options	All Directional Inserts Included	

POWER, LAMPS AND BATTERY	ECONOMY CEILING MOUNT	ECONOMY WALL MOUNT
Power Consumption (Standby / Max)	1.4W / 2.3W	
Lamp(s)	50,000 Hours LED	
Battery	Lithium Iron Phosphate	
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 1100mAh	
Charging Method	Intelligent Current Limited Constant Voltage	

TECHNICAL SPECIFICATIONS		ACCESSORIES	CEILING MOUNT	WALL MOUNT
Operating Mode	Maintained	Cantilever Bracket (Ceiling)	3562090	3562090
Voltage (V) Frequency (Hz)	220-240V (50Hz)	Wireguard (Wall Mount)	2530050	2530050
Construction - Body/Diffuser	ABS / PC	Wireguard (Ceiling Mount)	2530110	2530110
Viewing Distance	24m			
Operating Temperature	1°C to 40°C			
IP Rating (IP)	IP20			


CLASSIFICATION	CEILING MOUNT	WALL MOUNT
C0	D3.2	E2
C90	D3.2	E2

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E2	5.0	5.2	5.2	5.2	0.0	0.0	0.0	0.0	0.0
D3.2	6.5	6.5	6.5	6.5	6.3	6.1	5.8	0.0	0.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

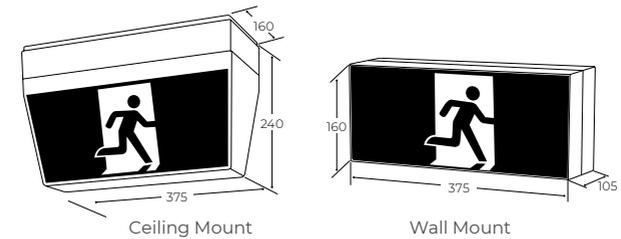

Dimensions (mm)

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

WEATHERPROOF UNIVERSAL EXIT



Premium Economy Weatherproof

The Weatherproof Universal Exit offers a cost effective solution for applications that require an IP66/67 rated exit.

Mounting can be either wall or ceiling with the option of single or double sided decals.

Built with a polycarbonate clear cover and nylon base that is tested to an impact rating of IK10 it is easy to see why it is a popular choice for weatherproof applications.

TRADE SERIES

Applications

- Schools
- Public Amenities
- Factories
- Stadiums
- Car Parks
- Warehouses



Features and Benefits

- AS/NZS 2293 compliant
- Wall or ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate battery



ORDERING INFORMATION

Part Number	EWELED-LI
Carton Quantity	4
Weight - Unit (Carton)	2.8kg (11.2kg)
Dimensions (L x W x H)	410mm x 100mm x 272mm
Directional Options	All Directional Inserts Included

POWER, LAMPS AND BATTERY

Power Consumption (Standby/Max)	1.1W / 2.0W
Lamp(s)	50,000 Hours LEDs
Battery	Lithium Iron Phosphate
Voltage (V)/Milliamp Per Hour (mAh)	3.2V/600mAh
Charging Method	Intelligent Current Limited Constant Voltage

ACCESSORIES

Cantilever Bracket	CLVBRT-CF-WP
--------------------	--------------

AS/NZS 2293 CLASSIFICATION

C0	E2
C90	E1.6

SPACING TABLE AND MOUNTING HEIGHTS - AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m
E1.6	4.6	4.7	4.6	0.0	0.0	0.0	0.0	N/A	N/A
E2	5.0	5.2	5.4	5.2	0.0	0.0	0.0	0.0	N/A

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction - Body/Diffuser	Cleverfit Inside Glass Reinforced Nylon Base and PC Cover
Viewing Distance	24m
Mounting Type	Wall and Ceiling (Single and Double Sided)
Operating Temperature	0°C to 40°C
IP Rating (IP)	IP66/67
Impact Rating (IK)	IK10

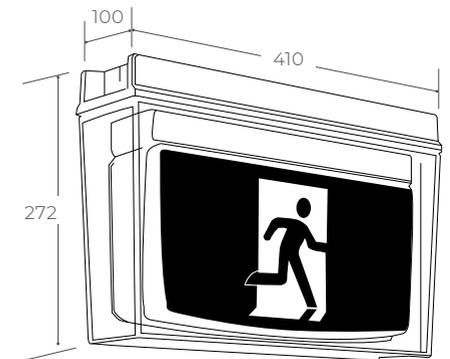

Dimensions (mm)

Based on minimum light level of 0.2 lux. Maximum allowed mounting height is 2.7m but for exceptions see AS/NZS 2293.1. The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT BASIC (D32)



Economy LED Recessed Emergency Light



The Lifelight provides a D32 emergency classification in a sleek architectural design.

With market-leading lithium battery technology and energy efficient LEDs the Lifelight will deliver lower maintenance and energy costs.

Features and Benefits

- AS/NZS 2293.3 compliant
- D32 emergency classification
- 145mm adaptor plate for retrofitting
- Low Power consumption
- Spring clips for easy installation



TRADE SERIES

Applications

- Office Buildings
- Apartments
- Schools
- Retail outlets

ORDERING INFORMATION

Part Number	ELIFE-LI
Carton Quantity	10 pieces
Weight - Single (Carton)	0.5kg (8.2kg)
Dimensions (Head Diameter)	95mm
Dimensions (Adaptor Plate)	145mm
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm

AS/NZS 2293 CLASSIFICATION

C0	D32
C90	D32

POWER, LAMPS AND BATTERY

Power Consumption (Standby/Max)	0.4W / 1.3W
Lamp(s)	1 x LED (Lifetime warranty on the lamp head and loom assembly)
Battery	Lithium Iron Phosphate
Voltage (V)/Milliamp Per Hour (mAh)	3.2V / 1500mAh
Charging Method	Intelligent Current Limited Constant Voltage


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D32	11.5	13.2	14.8	16.5	17.6	18	18.5	19	19.5	20.1	20.5	20.7	20.6	20.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
 *Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

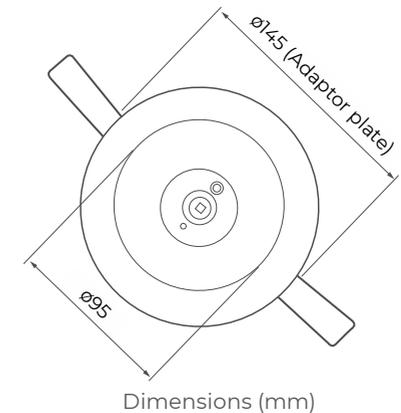

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT



Premium Economy LED Recessed Emergency Light

The Lifelight provides a D40 emergency classification in a sleek architectural design. With market-leading lithium battery technology and energy efficient LEDs the Lifelight will deliver lower maintenance and energy costs.

As the first LED emergency light on the market, the Lifelight continues to lead the way in a variety of emergency lighting applications.

TRADE SERIES

Applications

- Office Buildings
- Apartments
- Schools
- Retail outlets

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- 145mm adaptor plate for retrofitting
- Low Power consumption
- Spring clips for easy installation



ORDERING INFORMATION	
Part Number	ELIFE-X-LI
Carton Quantity	10 pieces
Weight - Single (Carton)	0.5kg (8.2kg)
Dimensions (Head Diameter)	95mm
Dimensions (Adaptor Plate)	145mm
Ceiling Hole Cut-Out	85mm
Minimum Ceiling Depth	120mm

AS/NZS 2293 CLASSIFICATION	
C0	D40
C90	D40


POWER, LAMPS AND BATTERY	
Power Consumption (Standby/Max)	0.4W / 1.3W
Lamp(s)	1 x LED (Lifetime warranty on the lamp head and loom assembly)
Battery	Lithium Iron Phosphate
Voltage (V)/Milliamp Per Hour (mAh)	3.2V / 3000mAh
Charging Method	Intelligent Current Limited Constant Voltage

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	23.1	23.0

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

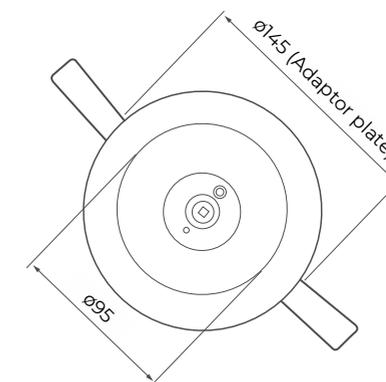

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT SURFACE MOUNT



Premium Economy LED Surface Mount Emergency Light

The newly designed Lifelight Surface Mount provides a D40 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight Surface Mount delivers low maintenance and energy costs.

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- Low Power consumption



TRADE SERIES

Applications

- Office Buildings
- Apartments
- Schools
- Retail outlets

ORDERING INFORMATION

Part Number	ELIFE-X-LI-SM
Carton Quantity	10 pieces
Weight - Single	0.6kg
Dimensions (L x W x H)	242mm x 125mm x 48mm

POWER, LAMPS AND BATTERY

Power Consumption (Standby/Max)	0.4W / 1.3W
Lamp(s)	1 x LED
Battery	Lithium Iron Phosphate
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 3000mAh
Charging Method	Intelligent Current Limited Constant Voltage

AS/NZS 2293 CLASSIFICATION

C0	D40
C90	D40

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.7	23.0	23.1	23

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

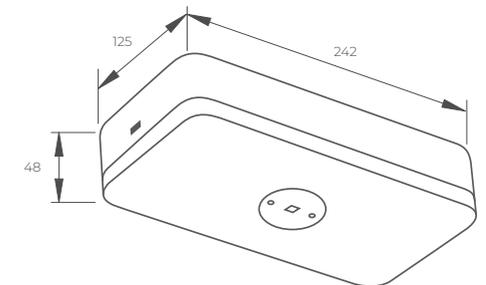

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

LIFELIGHT WEATHERPROOF SURFACE MOUNT



Premium Economy Weatherproof LED Emergency

The Lifelight surface mount weatherproof emergency luminaire is designed for use in applications where an IP65 rating is required.

The slimline high impact IK08 polycarbonate enclosure makes installation easy and provides robustness in open areas.

TRADE SERIES

Applications

- Office Buildings
- Apartments
- Schools
- Retail outlets

Features and Benefits

- AS/NZS 2293.3 compliant
- Low power consumption
- D50 classification
- IP65 & IK08



ORDERING INFORMATION

Part Number	ELIFE-X-LI-SM-WP
Carton Quantity	10 pieces
Weight - Single	0.8kg
Dimensions (L x W x H)	247mm x 129mm x 51mm

POWER, LAMPS AND BATTERY

Power Consumption (Standby/Max)	0.4W / 1.3W
Lamp(s)	1 x LED
Battery	Lithium Iron Phosphate
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage

AS/NZS 2293 CLASSIFICATION

C0	D50
C90	D50

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)


Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D50	11.5	13.2	14.8	16.5	18.1	19.8	21.8	22.5	23.1	24.1	24.9	25.4	25.7	25.8

Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>
 *Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS

Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP65

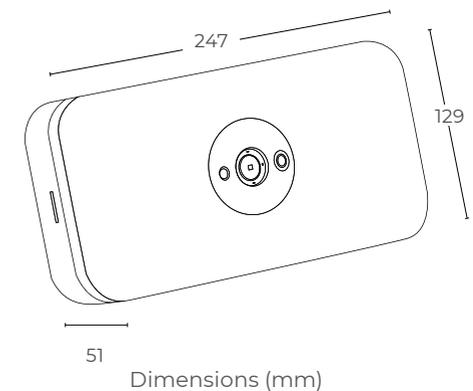

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

SUPALITE



Premium Economy LED Emergency Flood Light

The Supalite LED Flood is ideal for applications such as loading bays, car parks and evacuation points that are undercover.

Market leading lithium battery technology delivers lower maintenance costs and LED lamps provide a low standby power rating that will reduce energy costs significantly.

TRADE SERIES

Applications

- Warehouses
- Car Parks
- Factories
- Sports Facilities
- Schools
- Railway Stations



Features and Benefits

- AS/NZS 2293.3 compliant
- Low power consumption
- LED lamps
- 350 total lumen output
- Lithium Iron Phosphate battery



ORDERING INFORMATION

Part Number	EFLLED-LI
Carton Quantity	10
Weight - Single (Carton)	1.4kg (15.2kg)
Dimensions (L x W x H)	282mm x 64mm x 225mm


POWER, LAMPS AND BATTERY

Power Consumption (Standby / Max)	0.4W / 2.4W
Lamp(s)	2 x LED Heads
Lumen Output (Per Head / Total)	175lm / 350lm
Battery	Lithium Iron Phosphate
Voltage / mAh	3.2V / 6000mAh
Charging Method	Intelligent Current Limited Constant Voltage

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>


TECHNICAL SPECIFICATIONS

Operating Mode	Non-Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)
Operating Temperature	1°C to 40°C
Ingress Protection Rating (IP)	IP20 Weatherproof

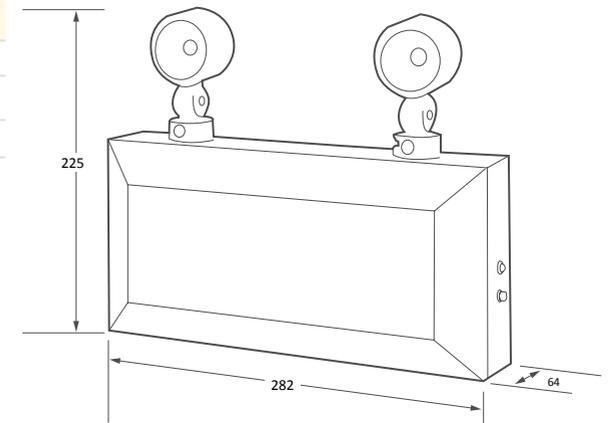

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

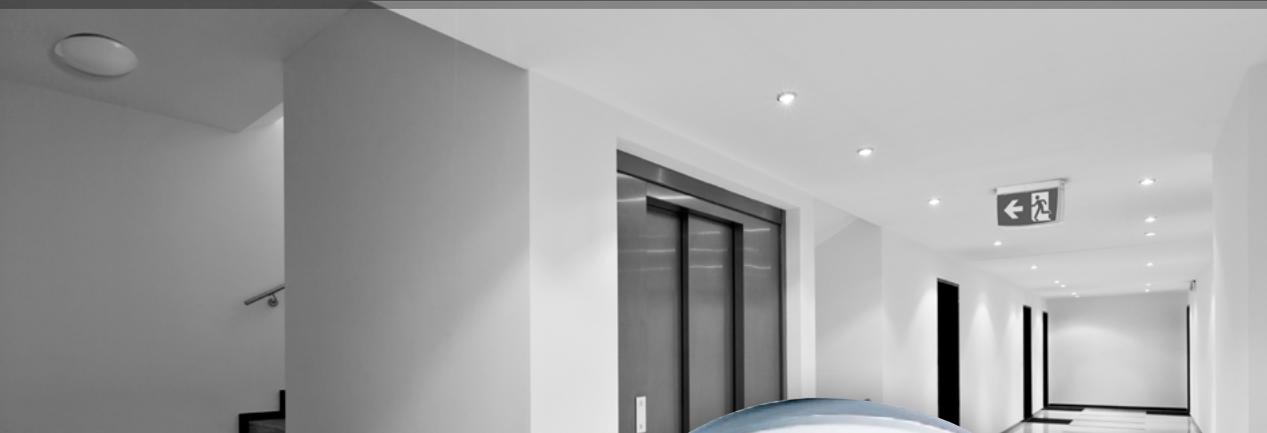

Premium Economy LED Circular Emergency light



The Circlite is an IP44 rated luminaire that is ideal for applications such as corridors, stairwells and walkways.

Constructed with a polycarbonate body and opal acrylic diffuser and with a large terminal block the Circlite is also easy to install.

With an emergency classification of D32, LED technology and available with microwave sensor technology the Circlite is a leader in this space.

TRADE SERIES

Applications

-  Office Buildings
-  Car Parks
-  Public Amenities
-  Railway Stations
-  Schools
-  Sports Facilities

Features and Benefits

- AS/NZS 2293.3 compliant
- D32 Emergency Classification
- IP44 weatherproof
- LED lamps
- Microwave sensor options
- Large terminal block



ORDERING INFORMATION	240V	EMERGENCY
Part Number	FCLLED	ECLLED-LI
Motion Sensor	FCLLED-MS	ECLLED-LI-MS
Carton Quantity	5	
Weight - Single (Carton)	2.2kg (13kg)	
Dimensions (Diameter x H)	340mm x 100mm	

POWER, LAMPS & BATTERY	240V	EMERGENCY
Power Consumption (Standby / Max)	14W	0.6W / 16W
Lamp(s) (CCT / Life)	LED Module 4000K / 30,000hrs (L70 / B50)	
Nominal Lumen Output	1340lm	1340lm
Battery	-	Lithium Iron Phosphate
Voltage / mAh	-	3.2V / 3000mAh
Charging Method	-	Intelligent Current Limited Constant Voltage

AS/NZS 2293 CLASSIFICATION

C0	D32
C90	D32


SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D32	11.5	13.2	14.8	16.5	17.6	18	18.5	19	19.5	20.1	20.5	20.7	20.6	20.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

TECHNICAL SPECIFICATIONS	240V	EMERGENCY
Operating Mode	Non-Emergency	Maintained
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	
Operating Temperature	1°C to 40°C	
Ingress Protection Rating (IP)	IP44	

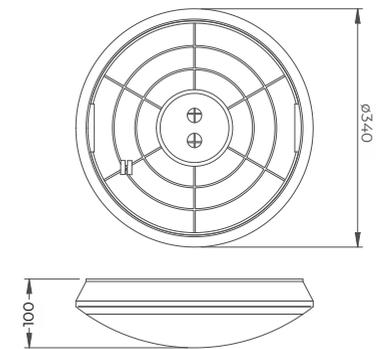

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

ARGO WEATHERPROOF LED BATTENS



Switchable Colour & Dual Output Weatherproof Batten Range

The ARGO is the perfect all-rounder when it comes to projects requiring a reliable, weatherproof batten. With IP65 and IK08 impact ratings combined with switchable colour and output, the ARGO provides greater flexibility on each project.

The emergency version contains market-leading Lithium Iron Phosphate battery technology. Packed with features at the right price and backed by Clevertronics reliability. You won't be let down by the ARGO.



Features and Benefits

- AS/NZS 2293.3 compliant
- IP65 rated for outdoor use
- Long life, energy efficient LED strip module
- Switchable Colour (3000K / 4000K / 5700K)
- Switchable Output (varies by model)
- Lithium (LiFePO4) Battery Technology
- Quick connect surface mount brackets and on-carton mounting template
- Large terminal block for easy installation
- IPART/VEU approval



TRADE SERIES

Applications

- Car Parks
- Stairwells
- Fire Stairs
- Corridors
- Back of House

ORDERING INFORMATION	600MM (2FT)					1200MM (4FT)				
	STANDARD		EMERGENCY			STANDARD		EMERGENCY		
Part Number	ARGO-600		ARGO-600-EM			ARGO-1200		ARGO-1200-EM		
Motion Sensors	ARGO-600-SEN		ARGO-600-EM-SEN			ARGO-1200-SEN		ARGO-1200-EM-SEN		
Carton Quantity						1				
Weight (Single)	1.25kg		1.5kg			2.3kg		3.3kg		
Dimensions (L x W x H)	655mm x 121mm x 88mm					1265mm x 121mm x 88mm				
POWER, LAMPS & BATTERY	STANDARD		EMERGENCY			STANDARD		EMERGENCY		
	MAIN LAMP ON	MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP ON	STANDBY CHARGE /MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP OFF	MAIN LAMP ON	MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP ON	STANDBY CHARGE /MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP OFF
Power Consumption										
CCT WITHOUT SENSOR						CCT WITHOUT SENSOR (LOW/HIGH OUTPUT)				
3000K	19W	-	19W	-	0.4W	38W/20W	-	38W/20W	-	0.4W
4000K	18W	-	18W	-	0.4W	35W/19W	-	36W/19W	-	0.4W
5700K	19W	-	19W	-	0.4W	38W/20W	-	38W/20W	-	0.4W
CCT WITH SENSOR						CCT WITH SENSOR				
3000K	19 W	2W	20W	2W	0.4W	37W	6W	38W	6W	0.4W
4000K	19 W	2W	19W	2W	0.4W	35W	6W	36W	6W	0.4W
5700K	19 W	2W	20W	2W	0.4W	37W	6W	38W	6W	0.4W
Lamp	Dual LED Strip Module									
Lamp(s) (CCT / Life)	3000K, 4000K, 5700K / 50,000hrs (L70 / B50, Ra>80 Ta40c)					3000K, 4000K, 5700K / 50,000hrs (L70 / B50, Ra>80 Ta40c)				
Nominal Total Light Output @4000K	2150lm					NO SENSOR (LOW OUTPUT) - 2431lm NO SENSOR (HIGH OUTPUT) - 4318lm SENSOR - 4202lm				
Battery	Lithium Iron Phosphate									
Voltage / mAh	3.2V/3000mAh									

EMERGENCY SPECIFICATIONS

Operating Mode	Sustained
Voltage (V) (Frequency (Hz))	220-240V(50Hz)
Ingress Protection Rating (IP)	IP65
Impact Rating (IK)	IK08
Energy Approvals	IPART/VEU

AS/NZS 2293 CLASSIFICATION

C0	D40
C90	D25


SPACING TABLE AND MOUNTING HEIGHTS - AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)

Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2	-	-
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23.0	20.6	20.3

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

Dimensions (mm)



The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

EPIC INDOOR LED BATTENS



Switchable Colour & Dual Output Indoor LED Batten Range

The EPIC Indoor LED batten range is a sleek and easy to install design combined with switchable colour and output featuring easy slide and click assembly, mounting template and large terminal block.

The emergency version contains market leading Lithium Iron Phosphate battery technology.

Packed with features and backed by Clevertronics reliability, the EPIC is built to impress.


TRADE SERIES

Applications

- Retail
- Offices
- Schools
- Corridors
- Back of House

Features and Benefits

- AS/NZS 2293.3 compliant
- Long life, energy efficient LED strip module
- Switchable colour (3000K / 4000K / 5700K)
- Switchable Output (varies by model)
- On-carton mounting template
- Large terminal block for easy installation
- Self-locating lanyard from diffuser to body
- Lithium (LiFePO4) Battery Technology

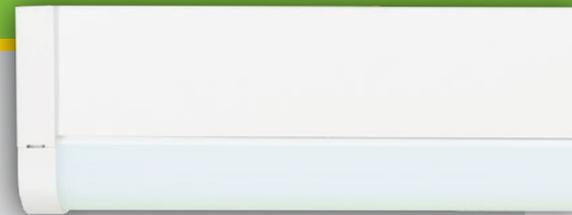

ORDERING INFORMATION	600MM (2FT)					1200MM (4FT)				
	STANDARD		EMERGENCY			STANDARD		EMERGENCY		
Part Number	EPIC-600		EPIC-600-EM			EPIC-1200		EPIC-1200-EM		
Motion Sensors	EPIC-600-SEN		EPIC-600-SEN-EM			EPIC-1200-SEN		EPIC-1200-SEN-EM		
Carton Quantity						1				
Weight (Unit)	0.8kg		1.0kg			1.6kg		1.7kg		
Dimensions (L x W x H)	605mm x 72mm x 78mm					1203mm x 72mm x 78mm				
POWER, LAMPS & BATTERY	STANDARD		EMERGENCY			STANDARD		EMERGENCY		
	MAIN LAMP ON	MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP ON	STANDBY CHARGE /MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP OFF	MAIN LAMP ON	MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP ON	STANDBY CHARGE /MAIN LAMP ON @ MIN. 10%	STANDBY CHARGE /MAIN LAMP OFF
Power Consumption										
CCT WITHOUT SENSOR					CCT WITHOUT SENSOR (LOW/HIGH OUTPUT)					
3000K	18.5W	-	18.9W	-	0.4W	181W/372W	-	185W/376W	-	0.4W
4000K	179W	-	18.3W	-	0.4W	176W/355W	-	18W/359W	-	0.4W
5700K	18.6W	-	19.0W	-	0.4W	179W/367W	-	18.3W/371W	-	0.4W
CCT WITH SENSOR					CCT WITH SENSOR					
3000K	197W	3.2W	201W	3.6W	0.4W	38.4W	5.7W	38.8W	6.1W	0.4W
4000K	191W	3.2W	195W	3.6W	0.4W	36.7W	5.7W	37.1W	6.1W	0.4W
5700K	198W	3.2W	202W	3.6W	0.4W	37.9W	5.7W	38.3W	6.1W	0.4W
Lamp	Dual LED Strip Module									
Lamp(s) (CCT / Life)	3000K, 4000K, 5700K / 54000hr life (L70 / B50, Ra >80 Ta 40c)					3000K, 4000K, 5700K / 54000hr life (L70 / B50, Ra >80 Ta 40c)				
Nominal Total Light Output @4000K	2199lm					NO SENSOR (LOW OUTPUT) - 2439lm NO SENSOR (HIGH OUTPUT) - 4673lm SENSOR - 4673lm				
Battery	Lithium Iron Phosphate									
Voltage / mAh	3.2V / 3000mAh									


EMERGENCY SPECIFICATIONS		AS/NZS 2293 CLASSIFICATION	
Operating Mode	Sustained	C0	D40
Voltage (V) (Frequency (Hz))	220-240V (50Hz)	C90	D25
Ingress Protection Rating (IP)	IP20		
Impact Rating (IK)	IK03		

SPACING TABLE AND MOUNTING HEIGHTS - AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D25	11.5	13.2	14.8	15.7	16.1	16.4	16.8	17.3	17.6	18.1	18.3	18.2		
D40	11.5	13.2	14.8	16.5	18.1	19.5	20.1	20.7	21.2	22.1	22.6	23	20.6	20.3

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

Dimensions (mm)

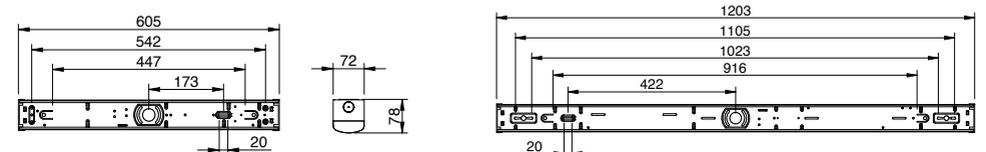

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.

Victoria

1 Caribbean Drive
Scoresby VIC 3179
Phone: +61 3 9559 2700
Fax: +61 3 9559 2799

New South Wales

9 Distribution Place
Seven Hills NSW 2147
Phone: +61 2 8805 6400
Fax: +61 2 8805 6444

Queensland

2/8-12 Monte-Khoury Drive
Loganholme QLD 4129
Phone: +61 7 3442 9700
Fax: +61 7 3442 9777

Western Australia

12 Milly Court
Malaga WA 6090
Phone: +61 8 9207 0000
Fax: +61 8 9248 3725

South Australia

U2/19 Main Terrace
Richmond SA 5033
Phone: +61 8 8301 8800
Fax: +61 8 8351 8286

Auckland

Unit 22/761 Great South Road
Penrose Auckland 1061
Phone: +64 800 548 448

Christchurch

163C Wordsworth Street
Sydenham Christchurch 8023
Phone: +64 092 224 635

clevertronics.com.au
clevertronics.co.nz