




NIFTY-BLK

Nifty Lifelight Emergency, Recessed Mount, Trade Series, Black

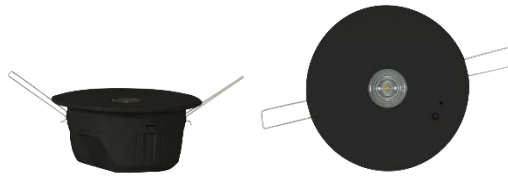

PRODUCT INFORMATION

Part Number	NIFTY-BLK
MIC	AUT00000001801
Description	Nifty Lifelight Emergency, Recessed Mount, Trade Series, Black
Construction	PC/ABS
Mounting	Recessed Mount
Dimensions	110mm Head Diameter (140mm with Adaptor Plate) 54mm Height
Cut-Out	90mm (120mm with Adaptor Plate)
Minimum Depth	45mm
Weight	0.3kg (0.4kg with Packaging)
Operating Mode	Non-Maintained
Testing System	N/A - Manual Test Switch
Battery	Lithium Iron Phosphate, 3.2V 1500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Lamp(s)	4 x LED
Operating Voltage	240V AC; 50Hz
Power Consumption	0.5 Watts (Standby), 1.6 Watts (Max)
Power Factor (High)	0.352
Inrush Current (Peak/Duration)	26.6A / 47.2µs
Supply Current	20.51mA
IP Rating	IP40
Operating Temperature	1°C to 40°C
AS2293 Classification	C0=D40 C90=D40
Applicable Standards	AS/NZS3820, CISPR15, AS/NZS2293.3
Compliance Marking (RCM)	

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1560106	Battery
8003660	Emergency Driver
8050176	LED Strip

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order