




ZXT-SEN-PIR-CC

HIVE Combine PIR Standalone Motion Sensor, Recessed



PRODUCT INFORMATION	
Part Number	ZXT-SEN-PIR-CC
MIC	INL00000000301
Description	HIVE Combine PIR Standalone Motion Sensor, Recessed
Mounting	Recessed
Dimensions LxWxH (mm)	See images below
Supply Voltage	220-240V~ 50Hz
Standby Power	<1W
Operating Temperature	-20°C to 50°C
Operation frequency	2.4 GHz - 2.483 GHz
Transmission power	4 dBm
PIR detection range (max)	Installation Height: 6m, Detection Range(Ø): 9m. See table below.
Local Output Interface	1 channel relay output, switching Live, normally open contact (NO), 800VA (Capacitive) 800W (Resistive) load rating.
IP Rating	IP20
Compliance Marking (RCM)	
Applicable Standards	EN55015, EN61000, EN61547, EN60669-1, EN60669-2-1, AS/NZS60669-1/-2-1, EN300328, EN301489-1/-17

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order

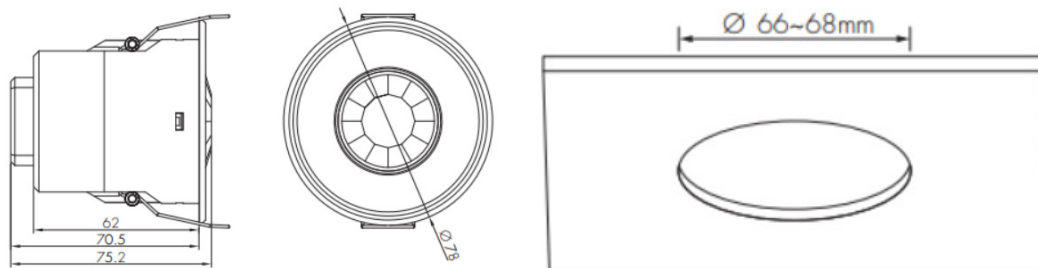

A: Tangential movement	B: Radial movement	Mount height	Tangential (A)	Radial (B)
		2.5m	max 50m² (Ø = 8m)	max 13m² (Ø = 4m)
		3m	max 64m² (Ø = 9m)	max 13m² (Ø = 4m)
		4m	max 38m² (Ø = 7m)	max 13m² (Ø = 4m)
		5m	max 38m² (Ø = 7m)	max 13m² (Ø = 4m)
		6m	max 38m² (Ø = 7m)	max 13m² (Ø = 4m)