



EASY INSTALL - Comes with large terminal block allows for fast installation and maintenance.

ENERGY EFFICIENT LED - 14 to 16W replacing traditional 32W Oyster luminaires.

LONG LIFE LED - Energy efficient, long life 30,000hr LEDs.



The Circlite LED has a superior classification of C0=D32 C90=D32 providing a large 278m² coverage. With an IP44 rating, sturdy polycarbonate construction and opal acrylic diffuser. It is ideal for applications such as corridors and stairwells.

Available with the latest Hawkeye Microwave Motion Sensor, you can save even more energy as the fitting will illuminate only when presence is detected. Capable of the following options: on/off, min/max and never off.

Coupling this state of the art technology with slim 348mm (diameter) x 100mm (depth), robust design the LED Circlite will make the perfect addition to your preferred product portfolio.

HAWKEYE MICROWAVE MOTION SENSOR

240V and LED Circlite, maintained emergency luminaire with microwave sensor control.



The integral Hawkeye microwave motion sensor turns off the main light source when no presence is detected, saving energy and money. Capable of the following options: on/off, min/max and never off.

SPECIFICATION

NON-EMERGENCY	Standby Power	Lumen Output
FCLLED	14.2W	1146 lm
FCLLED-MS	14.9W*	

SPECIFICATION

ECONOMY	Standby Power	C0	C90
ECLLED	15.9W	D32	D32
ECLLED-MS	16.3W*		

*-MS versions Power Consumption figure stated is the maximum value when on (presence detected)

Non-Emergency Circlite LED

Surface mounted LED circular, 30,000 hour LED, optional Hawkeye microwave motion sensor control.

Circlite LED - High temperature Nickel Cadmium battery


Surface mounted LED circular, 30,000 hour LED, optional Hawkeye microwave motion sensor control, pulse charged high temperature Nickel Cadmium battery pack.

AS2293 SPACING TABLE & MOUNTING HEIGHT (m)

Classification	2.1	2.4	2.7	3.0	3.3	3.6	4.0	5.0	6.0	7.0	8.0	9.0	10	15
D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.5	20.2	20.6	20.7	20.6	20.3	14.6

SPARE PARTS

	Battery
ECLLED	1510165
ECLLED-MS	

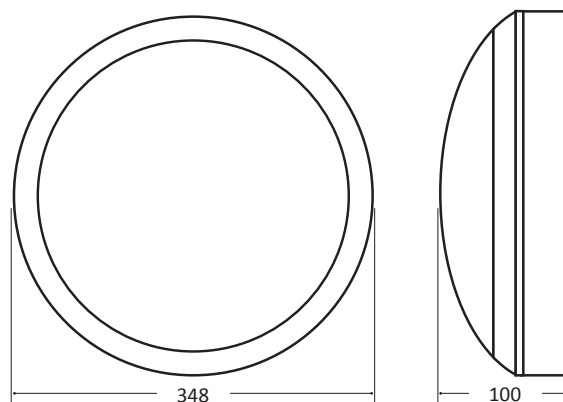

Dimensions (mm)

Version: January 2016-1

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.