




CLEVERTRONICS LIFELIGHT PRO RECESSED EMERGENCY

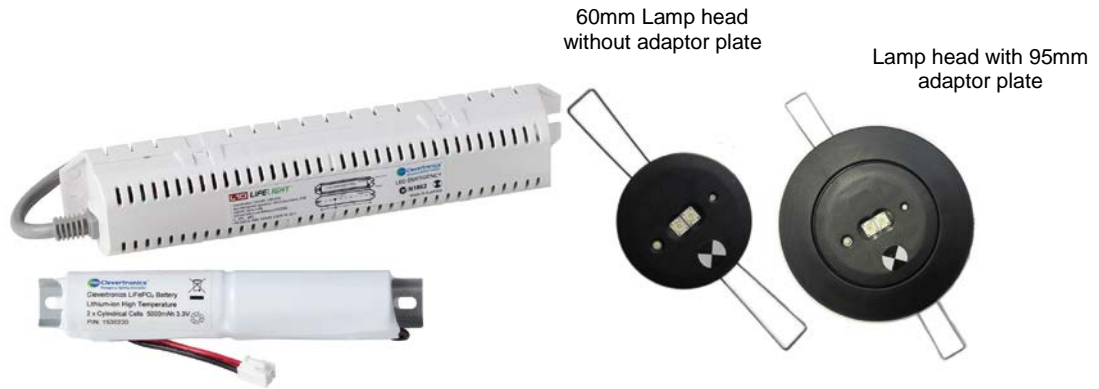

PRODUCT INFORMATION

Catalogue Number	LLIFE-PRO-ZW-BLK
Description	Lifelight PRO, High Performance, Recessed Emergency Light with Lithium Battery Technology
Mounting	Recessed Ceiling
Dimensions L x W x H	232mm x 40mm x 40mm (Control Pack) , 60mm Head Diameter (95mm with adaptor plate)
Ceiling hole cut-out	51mm, 85mm (with adaptor plate)
Minimum ceiling depth	200mm, 120mm (with adaptor plate)
Operating Mode	Non-Maintained
Testing System	Zoneworks Computerised Testing
Ballast	N/A
Charging Method	Intelligent current limited constant voltage charger
Lamps(s)	2 x 3W LED (Lifetime warranty on the lamp head and loom assembly) No dome cover required
Operating Voltage	240V 50Hz
Power Consumption	0.4 Watts
IP Rating	IP20
Impact Rating	N/A
Operating Temperature	1° to 40°C (Ambient)
AS/NZ2293 Classification	C ₀ =D63 C ₉₀ =D63

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1100834	2 x 3W LED Round Head Assembly & Ring – Black
1530230	Battery, 3.3V 5Ah.Li-ion, 200mm lead with Bracket
8002390	Driver, PCA:Lifelight Pro, Zoneworks Compatible
8001450	Zoneworks Powerline Node