

T8 WEATHERPROOF BATTENS

ECONOMY
NiCd BATTERY RANGE



EASY INSTALL - Comes with large terminal block and stainless steel mounting brackets for fast installation and maintenance.

WIDE BODY - To cover junction boxes and provides ample space for heat generating components.

LAMPS INCLUDED - T8 840 Tri Phosphor fluorescent lamp included.

Clevertronics weatherproof battens feature quality components and a superior finish to provide reliability and performance.

It is available in standard 240V and emergency option with high temperature Ni-Cd battery.

Applications include underground car parks, warehouses, stairwells and industrial sites.

FEATURES



Stainless steel brackets for quick installation, ensuring the luminaire maintains weatherproof rating



Weatherproof grommet or conduit entry



Stainless steel captive & tamper-proof clips

T8 WEATHERPROOF BATTENS

ECONOMY
NiCd BATTERY RANGE

NON-EMERGENCY	Part number
1x18W	FWB118-P
2x18W	FWB218-P
1x36W	FWB136-P
2x36W	FWB236-P

SPECIFICATION

ECONOMY	Non-maintained	Maintained	C0	C90	C180
1x18W	EWB118N-P	EWB118M-P*	D25	C25	-
2x18W	-	EWB218M-P	D25	C25	D20
1x36W	EWB136N-P	EWB136M-P	D50	C40	-
2x36W	-	EWB236M-P	D50	C50	D40



*Only available in wide body

AS2293 SPACING TABLE & MOUNTING HEIGHT (m)

Classification	2.1	2.4	2.7	3.0	3.3	3.6	4.0	5.0	6.0	7.0	8.0	9.0	10	15
C25	9.4	10.0	10.5	11.0	11.5	11.9	12.4	13.4	14.0	14.4	14.6	14.5	14.2	6.6
C40	10.6	11.3	12.0	12.6	13.1	13.6	14.3	15.6	16.6	17.4	17.9	18.3	18.5	16.2
C50	11.3	12.0	12.7	13.4	14.0	14.5	15.2	16.7	17.9	18.8	19.6	20.1	20.4	19.6
D20	13.1	13.6	14.1	14.5	14.8	15.1	15.5	16.1	16.4	16.3	16.0	15.4	14.5	-
D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.7	18.1	18.3	18.2	17.9	17.3	7.7
D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	21.3	22.1	22.7	23.0	23.1	23.1	19.4
D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	23.2	24.2	24.9	25.4	25.7	25.9	23.7

PRODUCT DIMENSIONS (mm)

	Body type	L	W	H
1x18W	Narrow body	655	100	105
1x18W & 2x18W	Wide body	655	160	105
1x36W	Narrow body	1265	100	105
1x36W & 2x36W	Wide body	1265	160	105

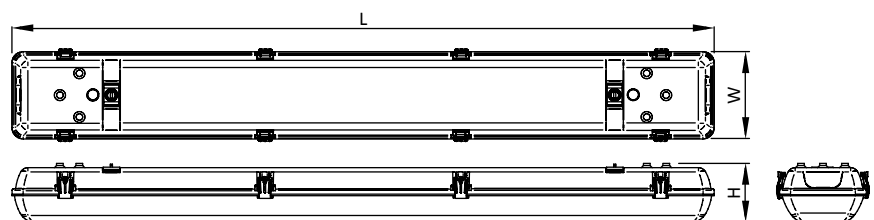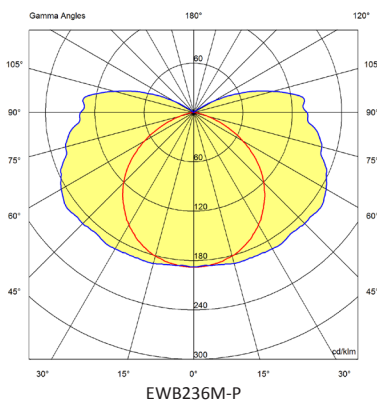

Version: January 2016-1

Please check our website for your closest Clevertronics office and local representative. Due to changes in industry standards and Clevertronics policy of product improvement, specification details are subject to change without notice.