




## CLEVERTRONICS LP ARGONAUT LED WEATHERPROOF BATTEN - LOW POWER OUTPUT



Gen 1

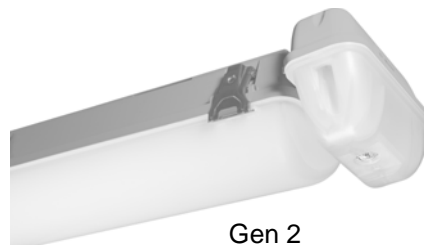

Gen 2

### PRODUCT INFORMATION

|                       |  |
|-----------------------|--|
| Catalogue Number      | CWB4LEDS-P-LO-ZW   |
| Description           | LP Premium 4ft Argonaut Weatherproof Batten with LED Emergency POD                                   |
| Construction          | Polycarbonate Base, Polycarbonate Diffuser and Captive Stainless Steel Clips with Tamperproof Screws |
| Mounting              | Surface Mount  |
| Dimensions L x W x H  | 1220mm x 110mm x 108mm   |
| Weight                | 3.3kg  |
| Operating Mode        | Sustained  |
| Testing System        | Zoneworks computerised testing   |
| Battery               | Lithium Iron Phosphate, 3.2V 3200mAh   |
| Charging Method       | Intelligent Current Limited Constant Voltage   |
| Diffuser              | Polycarbonate  |
| Driver                | OSRAM OT FIT, 50,000hr   |
| Lamp(s)               | LED strip module, 4,000K natural white, 50,000h life [L70/B50 Ta 40°C], Ra>80                        |
| Operating Voltage     | 240V AC; 50Hz  |
| Power Factor          | 0.95   |
| Total lumen output    | 3200 lm @ 100lm/W  |
| Power Consumption     | 32 Watts (Lamps ON), 0.4 Watts (Lamps OFF)   |
| IP Rating             | IP66 (Batten), IP65 (POD)  |
| Operating Temperature | 0°C to 40°C  |
| AS2293 Classification | C <sub>0</sub> =D63 C <sub>90</sub> =D50 (Gen 1)<br>C <sub>0</sub> =D80 C <sub>90</sub> =D80 (Gen 2) |
| Impact Rating         | IK08   |

### REPLACEMENT PARTS

| PART NUMBER       | DESCRIPTION                                    |
|-------------------|--|
| 1550050           | Battery, LP 3.2V 3200mAh 70mm lead, no Bracket |
| 8002692           | PCA:LED Argonaut Stand&tray,1.2m,LMF36         |
| 1330035           | LED Driver - Argonaut Low Output               |
| CLIFE-PRO-CKIT-NP | LifelightPro,Control Only,Batten,LP, NP        |
| 8001450           | PCA:Powerline Node ZW, #CT10310-A6             |

