




## CLEVERTRONICS L10 OPTIMUM MAINTAINED LIFELIGHT PRO RECESSED EMERGENCY

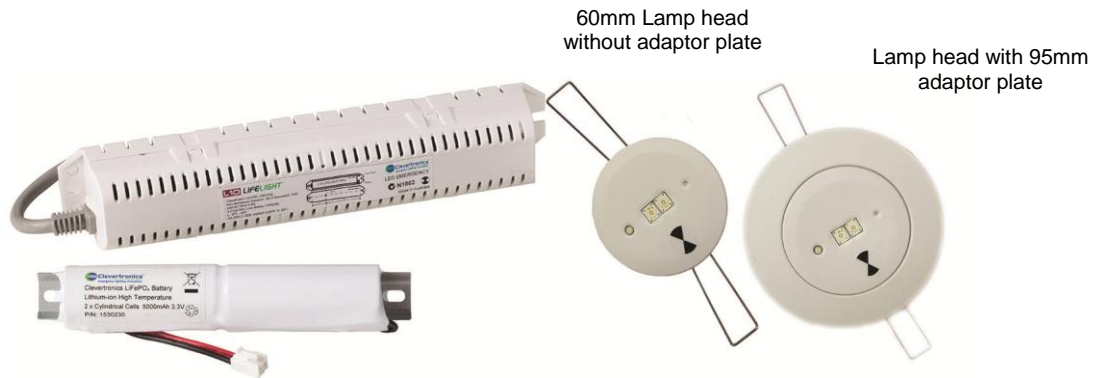

### PRODUCT INFORMATION

Catalogue Number	LLIFEM-PRO-SA
Description	Maintained Lifelight PRO, High Performance, Recessed Emergency Light with Lithium Battery Technology. (switched active on/off control of LED's)
Mounting	Recessed Ceiling
Dimensions L x W x H	232mm x 40mm x 40mm (Control Pack) , 60mm Head Diameter (95mm with adaptor plate)
Ceiling hole cut-out	51mm, 85mm (with adaptor plate)
Minimum ceiling depth	200mm, 120mm (with adaptor plate)
Operating Mode	Maintained
Testing System	Manual Test Switch
Charging Method	Intelligent current limited constant voltage charger
Lamps(s)	2 x 3W LED (Lifetime warranty on the lamp head and loom assembly) No dome cover required
Operating Voltage	240V 50Hz
Power Consumption	4.7W with LEDs on in Maintained Mode (0.4W standby with Switched Active OFF)
IP Rating	IP20
Impact Rating	N/A
Operating Temperature	1° to 40°C (Ambient)
AS/NZ2293 Classification	C <sub>0</sub> =D50 C <sub>90</sub> =D50

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1100833	Lamps: 2 x 3W LED Round Head Assembly & Ring - White
1530230	Battery: 3.3V 5Ah.Li-ion, 200mm lead with Bracket
LLIFEM-PRO-SA-CKIT	PCA: Lifelight Pro Control Gear

