




CLEVERTRONICS L10 ARGONAUT LED WEATHERPROOF BATTEN - LOW POWER OUTPUT



Gen 1

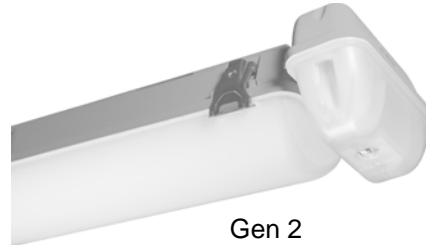

Gen 2

PRODUCT INFORMATION

Catalogue Number	LWB4LEDS-P-LO-ZW
Description	L10 Optimum 4ft Argonaut Weatherproof Batten with LED Emergency POD
Construction	Polycarbonate Base, Polycarbonate Diffuser and Captive Stainless Steel Clips with Tamperproof Screws
Mounting	Surface Mount
Dimensions L x W x H	1220mm x 110mm x 108mm
Weight	3.3kg
Operating Mode	Sustained
Testing System	Zoneworks computerised testing
Battery	Lithium Nanophosphate, 3.2V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Polycarbonate
Driver	OSRAM OT FIT, 50,000hr
Lamp(s)	LED strip module, 4,000K natural white, 50,000h life [L70/B50 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	3200 lm @ 100lm/W
Power Consumption	32 Watts (Lamps ON), 0.4 Watts (Lamps OFF)
IP Rating	IP66 (Batten), IP65 (POD)
Operating Temperature	0°C to 40°C
AS2293 Classification	C ₀ =D63 C ₉₀ =D50 (Gen 1) C ₀ =D80 C ₉₀ =D80 (Gen 2)
Impact Rating	IK08

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	BATTERY:L10 3.3V 2.5AH 70mm lead,noBRKT
8002692	PCA:LED Argonaut Stand&tray,1.2m,LMF36
1330035	LED Driver - Argonaut Low Output
LLIFE-PRO-CKIT-NP	LifelightPro,Control Only,Batten,L10, NP
8001450	PCA:Powerline Node ZW, #CT10310-A6

