

LIFELIGHT PRO CYLINDER SURFACE MOUNT









Premium LED Emergency Light

The Lifelight Pro Cylinder is an energy efficient, lithium powered LED emergency light in a small and sleek architectural design. The D63 classification of the Lifelight Pro provides an amazing 60% increase in emergency lighting coverage compared to many existing emergency lights on the market.

Suitable in a variety of applications the Lifelight Pro will provide outstanding performance and too many will reduce installation and maintenance costs.

Applications

- | | |
|---|--|
|  Office Buildings |  Showrooms |
|  Galleries |  Retail Outlets |
|  Apartments |  Theatres |

Features and Benefits

- AS/NZS 2293.3 compliant
- D63 classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black (other colours on request)



LIFELIGHT PRO CYLINDER SURFACE MOUNT

ORDERING INFORMATION		LP	L10
PART NO.	Standard - White	CLIFE-PRO-SMC	LLIFE-PRO-SMC
	Standard - Black	CLIFE-PRO-SMC-BLK	LLIFE-PRO-SMC-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SMC-DALI	LLIFE-PRO-SMC-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SMC-HV	LLIFE-PRO-SMC-HV
Carton Quantity	1 piece	1 piece	
Weight - single (carton)	1.5kg	1.5kg (17kg)	
Dimensions (L x W x H)	128mm (D) x 252mm	128mm (D) x 252mm	

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)	0.4W / 4.7W		
Lamp(s)	2 x LED		
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®	
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh	3.3V / 5000mAh	
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS	LP	L10
Battery	1550230	1530230
DALI Node	8003060	8003060
Zoneworks® XT Hive Node	8003190	8003190


CLASSIFICATION	LP	L10
C0	D63	D63
C90	D63	D63

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D63	11.5	13.2	14.8	16.5	18.1	19.8	22	24.5	25.2	26.4	27.3	28	28.5	28.8

n Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit: <https://clevertronics.com.au/spacing-tables/>

*Warranty information located at: <https://clevertronics.com.au/warranty-statement/>

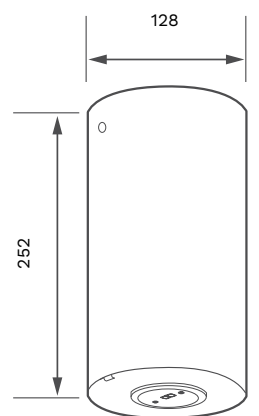

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.