

LIFELIGHT PRO SURFACE MOUNT









Premium LED Emergency Light

The newly designed Lifelight PRO Surface Mount provides a D80 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight PRO Surface Mount delivers lower maintenance and energy costs.

Applications

- | | |
|---|--|
|  Office Buildings |  Showrooms |
|  Galleries |  Retail Outlets |
|  Apartments |  Theatres |



Features and Benefits

- AS/NZS 2293.3 compliant
- D80 classification
- Low 0.4W power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours on request



LIFELIGHT PRO SURFACE MOUNT

ORDERING INFORMATION		LP	L10
PART NO.	Standard - White	CLIFE-PRO-SM	LLIFE-PRO-SM
	Standard - Black	CLIFE-PRO-SM-BLK	LLIFE-PRO-SM-BLK
	Clevertest Plus System Compatible	Yes	
	DALI	CLIFE-PRO-SM-DALI	LLIFE-PRO-SM-DALI
	Zoneworks® XT Hive	CLIFE-PRO-SM-HV	LLIFE-PRO-SM-HV
Carton Quantity	10 pieces	10 pieces	
Weight - single	0.7kg	0.7kg	
Dimensions (L x W x H)	242mm x 125mm x 48mm		

POWER, LAMPS AND BATTERY		LP	L10
Power Consumption (Standby / Max)	0.4W / 4.7W		
Lamp(s)	2 x LED		
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®	
Voltage (V) / Capacity (mAh)	3.2V / 6400mAh	3.3V / 5000mAh	
Charging Method	Intelligent Current Limited Constant Voltage		

TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS	LP	L10
Battery	1550231	1530231
DALI Node	8003060	8003060
Zoneworks® XT Hive Node	8003191	8003191


CLASSIFICATION	LP	L10
C0	D80	D80
C90	D80	D80

SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX)														
Classification	2.1m	2.4m	2.7m	3.0m	3.3m	3.6m	4.0m	4.5m	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m
D80	11.5	13.2	14.8	16.5	18.1	19.8	22.0	24.7	27.5	28.9	30.0	30.9	31.5	32.1

n Care should be taken when spacing luminaires at the distances indicated by the shaded regions to ensure conformance to AS/NZS2293.1, Clause 4.3 is maintained. A single emergency luminaire shall not serve an area of greater than 500 m².

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

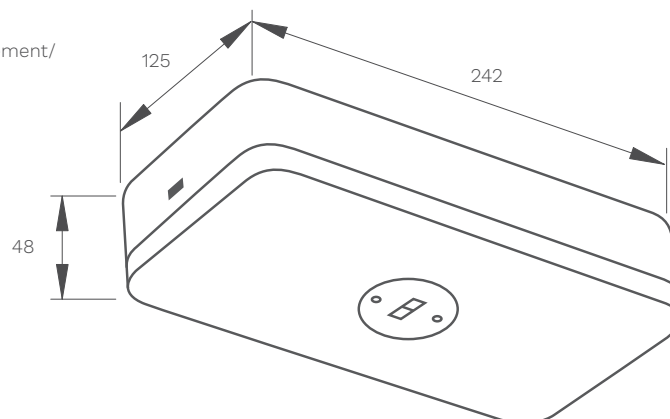

Dimensions (mm)

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.