




CLEVERTRONICS LP ARGONAUT LED WEATHERPROOF BATTEN - LOW POWER OUTPUT



Gen 1

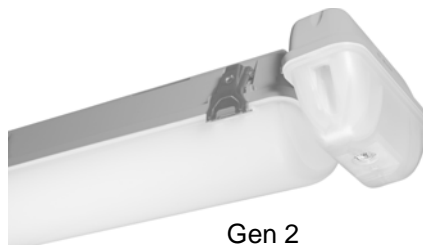

Gen 2

PRODUCT INFORMATION

| | |
|-----------------------|--|
| Catalogue Number | CWB4LEDS-P-LO-DD-DALI |
| Description | LP Premium 4ft Argonaut Weatherproof Batten with LED Emergency POD with DALI Driver |
| Construction | Polycarbonate Base, Polycarbonate Diffuser and Captive Stainless Steel Clips with Tamperproof Screws |
| Mounting | Surface Mount |
| Dimensions L x W x H | 1220mm x 110mm x 108mm |
| Weight | 3.3kg |
| Operating Mode | Sustained |
| Testing System | DALI compatible |
| Battery | Lithium Iron Phosphate, 3.2V 3200mAh |
| Charging Method | Intelligent Current Limited Constant Voltage |
| Diffuser | Polycarbonate |
| Driver | Tridonic LCA 50W 350-1050mA ONE4ALL |
| Lamp(s) | LED strip module, 4,000K natural white, 50,000h life [L70/B50 Ta 40°C], Ra>80 |
| Operating Voltage | 240V AC; 50Hz |
| Power Factor | 0.95 |
| Total lumen output | 3200 lm @ 100lm/W |
| Power Consumption | 32 Watts (Lamps ON), 0.4 Watts (Lamps OFF) |
| IP Rating | IP66 (Batten), IP65 (POD) |
| Operating Temperature | 0°C to 40°C |
| AS2293 Classification | C ₀ =D63 C ₉₀ =D50 (Gen 1) C ₀ =D80 C ₉₀ =D80 (Gen 2) |
| Impact Rating | IK08 |

REPLACEMENT PARTS

| PART NUMBER | DESCRIPTION |
|------------------------|--|
| 1550050 | Battery, LP 3.2V 3200mAh 70mm lead, no Bracket |
| 8002692 | PCA:LED Argonaut Stand&tray,1.2m,LMF36 |
| 1330056 | LED Driver - LC 50w 350-1050mA,ONEFORALL |
| CLIFE-PRO-CKIT-L850-NP | LifelightPro,Control Only,Batten,LP, NP |
| 8002200 | PCA:DALI Node, #CT10410-A3 |

DALI EM

LP LITHIUM IRON PHOSPHATE

PREMIUM

PROVEN PROJECT PERFORMANCE