




# CWB4LEDS-P-LO-MS-HL-DALI

## CLEVERTRONICS LP ARGONAUT LED WEATHERPROOF BATTEN WITH HI/LO FUNCTION - LOW POWER OUTPUT



Gen 1

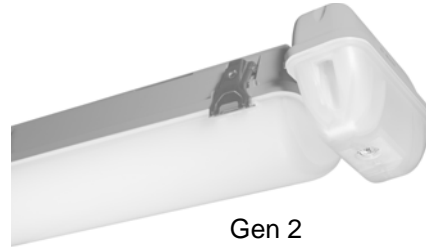

Gen 2



### PRODUCT INFORMATION

Catalogue Number	CWB4LEDS-P-LO-MS-HL-DALI
Description	LP Premium 4ft Argonaut Weatherproof Batten with LED Emergency POD and Microwave Sensor Control dimming of the Lamps (10% - 100%)
Construction	Polycarbonate Base, Polycarbonate Diffuser and Captive Stainless Steel Clips with Tamperproof Screws
Mounting	Surface Mount
Dimensions L x W x H	1220mm x 110mm x 108mm
Weight	3.5kg
Operating Mode	Sustained
Testing System	DALI compatible
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Polycarbonate
Driver	LED MSHL Driver - 65w 600-1200mA, 50,000hr
Lamp(s)	LED strip module, 4,000K natural white, 50,000h life [L70/B50 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	3200 lm @ 100lm/W
Power Consumption	33 Watts (Standby lamps max), 4.3 Watts (Standby lamps min)
IP Rating	IP66 (Batten), IP65 (POD)
Operating Temperature	0°C to 40°C
AS2293 Classification	C <sub>0</sub> =D63 C <sub>90</sub> =D50 (Gen 1) C <sub>0</sub> =D80 C <sub>90</sub> =D80 (Gen 2)
Impact Rating	IK08

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550050	Battery, LP 3.2V 3200mAh 70mm lead, no Bracket
8002692	PCA:LED Argonaut Stand&tray,1.2m,LMF36
1330090	LED MSHL Driver - 65w 600-1200mA, 35-55V
CLIFE-PRO-CKIT-L850-NP	LifelightPro,Control Only,Batten,LP, NP
8002200	PCA:DALI Node, #CT10410-A3

DALI EM

**LP** LITHIUM IRON PHOSPHATE  
**PREMIUM**  
 PROVEN PROJECT PERFORMANCE