


CLEVERTRONICS L10 ARGONAUT LED WEATHERPROOF BATTEN & MICROWAVE SENSOR (ZONWORKS XT HIVE)

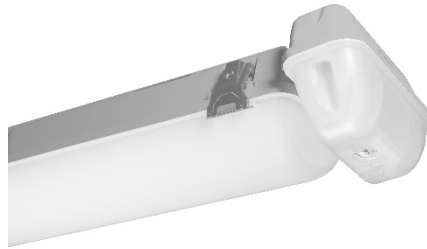

PRODUCT INFORMATION

Catalogue Number	LWB2LEDS-P-MS-HV
MIC	AUB01820220001
Description	L10 Optimum 2ft Argonaut weatherproof batten with LED Emergency POD and microwave sensor control of the lamps (on/off)
Construction	Polycarbonate base, polycarbonate diffuser and captive stainless steel clips with tamperproof screws
Mounting	Surface Mount
Dimensions L x W x H	664mm x 110mm (Batten) x 111mm, (POD Width 157mm)
Weight	2.2kg
Operating Mode	Sustained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Polycarbonate
Driver / Ballast	LED Driver - 25W, 500-700mA, 18-36V
Lamp(s)	LED strip module, 4,000K natural white, 149,000h life [L70/B50], 89,000h life [L80/B10], Ta 40°C, Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	2047lm @97lm/W
Power Consumption	26W (Max charging, Lamp ON), 23W(Standby, Lamp ON), 0.9W (Standby, Lamp OFF)
IP Rating	IP66 (Batten), IP65 (POD)
Operating Temperature	0°C to 40°C
AS2293 Classification	C ₀ =D80 C ₉₀ =D80
Impact Rating	IK08

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	Battery, L10 3.3V 2500mAh 70mm lead, no Bracket (Qty 2)
8002685	PCA:LED Strip Argonaut Stand & tray,0.6m
1330025	LED Driver - 25w 500-700mA, 18-36V
1190310	SENSOR:M/Wave Motion Remote MC015S/D
LLIFE-PRO-CKIT-NP	LifelightPro,Control Only,Batten,L10, NP
8003190	PCA: RF Node CT10678-Ax internal antenna

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order