


## CLEVERTRONICS L10 ARGONAUT LED WEATHERPROOF BATTEN (ZONWORKS XT HIVE)

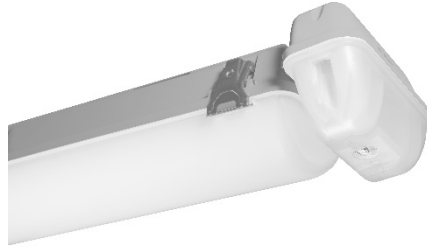

### PRODUCT INFORMATION

Catalogue Number	LWB4LEDS-P-DD-HV
MIC	AUB01820120001
Description	L10 Optimum 4ft Argonaut Weatherproof Batten with Dali Driver and LED Emergency POD
Construction	Polycarbonate Base, Polycarbonate Diffuser and captive stainless steel clips with tamperproof screws
Mounting	Surface Mount
Dimensions L x W x H	1220mm x 110mm x 108mm
Weight	3.3kg
Operating Mode	Sustained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Polycarbonate
Driver / Ballast	Tridonic LCA 50W 350-1050mA ONE4ALL
Lamp(s)	LED strip module, 4,000K natural white, 149,000h life [L70/B50 Ta 40°C], 89,000h life [L80/B10 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	4300 lm @ 105lm/W
Power Consumption	44W (MAX Charge - Lamp ON), 41W (Standby Lamp ON), 0.4W (Standby Lamp OFF)
IP Rating	IP66 (Batten), IP65 (POD)
Operating Temperature	0°C to 40°C
AS2293 Classification	C <sub>0</sub> =D80 C <sub>90</sub> =D80
Impact Rating	IK08

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	Battery, L10 3.3V 2500mAh 70mm lead, no Bracket
8002690	PCA:LED Strip Argonaut Stand & tray,1.2mm
1330040	LED Dali Driver – 50w 600-1400mA, 20-54V
LLIFE-PRO-CKIT-NP	LifelightPro,Control Only,Batten,L10, NP
8003190	PCA: RF Node CT10678-Ax internal antenna

*The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order*