


CLEVERTRONICS L10 ARGONAUT LED WEATHERPROOF BATTEN

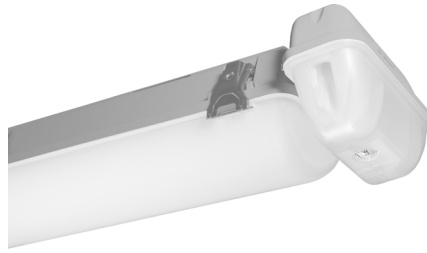

PRODUCT INFORMATION

Part Number	LWB4LEDS-P-DD-ZW
Description	L10 Lithium Nanophosphate Argonaut weatherproof batten with DALI driver and LED Emergency POD
Construction	Polycarbonate base, polycarbonate diffuser and captive stainless steel clips with tamperproof screws
Mounting	Surface mount
Dimensions L x W x H	1220mm x 110mm x 108mm
Weight	3.3kg
Operating Mode	Sustained
Testing System	Zoneworks Computerised Testing
Battery	Lithium Nanophosphate, 3.2V 2500mAh
Charging Method	Intelligent current limited constant voltage
Diffuser	Polycarbonate
Driver / Ballast	Tridonic LCA 50W 350-1050mA ONE4ALL
Lamp(s)	LED strip module, 4,000K natural white, 50,000h life [L70/B50 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	4300 lm @ 105lm/W
Power Consumption	44 Watts (Maintained Standby), 0.4 Watts (Standby)
IP Rating	IP20
Operating Temperature	1°C to 40°C
AS2293 Classification	C ₀ =D80 C ₉₀ =D80
Impact Rating	IK08

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	BATTERY:L10 3.3V 2.5AH 70mm lead,noBRKT
8002690	PCA:LED Strip Argonaut Standard inc tray
1330056	LED Driver - LC 50w 350-1050mA,ONEFORALL
LLIFE-PRO-CKIT-DALI-L850-NP	LLIFE-PRO-CKIT-DALI-L850-NP
8001450	PCA:Powerline Node ZW, #CT10310-A6

