


## CLEVERTRONICS L10 ARGONAUT LED WEATHERPROOF BATTEN WITH DALI DRIVER

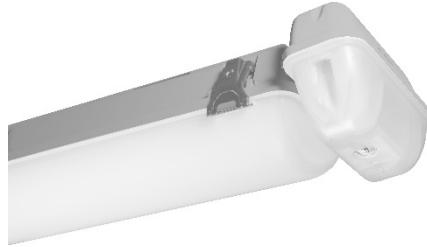

### PRODUCT INFORMATION

Catalogue Number	LWB4LEDS-P-DD
MIC	AUB01320130001
Description	L10 Optimum 4ft Argonaut Weatherproof Batten with Dali Driver and LED Emergency POD, Enabled with Clevertest Plus
Construction	Polycarbonate Base, Polycarbonate Diffuser and captive stainless steel clips with tamperproof screws
Mounting	Surface Mount
Dimensions L x W x H	1225mm x 157mm (POD) x 111mm, (Batten width 110mm)
Weight	3.3kg
Operating Mode	Sustained
Testing System	Clevertest Plus Enabled (Not activated by default)
Battery	Lithium Nanophosphate, 3.3V 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Polycarbonate
Driver / Ballast	Tridonic LCA 50W 350-1050mA ONE4ALL
Lamp(s)	LED strip module, 4,000K natural white, 149,000h life [L70/B50 Ta 40°C], 89,000h life [L80/B10 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	4125lm @ 96lm/W
Power Consumption	47W (MAX Charge - Lamp ON), 41W (Standby Lamp ON), 0.4W (Standby Lamp OFF)
IP Rating	IP65
Operating Temperature	0°C to 40°C
AS2293 Classification	C <sub>0</sub> =D80 C <sub>90</sub> =D80
Impact Rating	IK08

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	Battery, L10 3.3V 2500mAh 70mm lead, no Bracket ( x 2 )
8002690	PCA:LED Strip Argonaut Stand & tray,1.2mm
1330056	LED Driver - LCA 50w 350-1050mA,ONEFORALL
AUM01370080001	Lifelight Pro,Control Only, 850mm, L10, NP, OWC

*The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order*