

LIFELIGHT SURFACE MOUNT



LED Surface Mount Emergency Light

The newly designed Lifelight Surface Mount provides a D40 emergency classification in a small and sleek polycarbonate housing that is easy to install.

With market-leading lithium battery technology and energy efficient LEDs, the Lifelight Surface Mount delivers low maintenance and energy costs.



Applications

- | | |
|---|--|
|  Office Buildings |  Apartments |
|  Schools |  Retail outlets |

Features and Benefits

- AS/NZS 2293.3 compliant
- D40 emergency classification
- Low Power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- White or Black as standard with other colours available on request (LP & L10 only)



LIFELIGHT SURFACE MOUNT

| ORDERING INFORMATION | | EL | LP | L10 |
|------------------------|-----------------------------------|----------------------|---------------|---------------|
| PART NO. | Standard - White | ELIFE-X-LI-SM | CLIFE-SM | LLIFE-SM |
| | Standard - Black | - | CLIFE-SM-BLK | LLIFE-SM-BLK |
| | Clevertest Plus System Compatible | No | Yes | |
| | DALI | - | CLIFE-SM-DALI | LLIFE-SM-DALI |
| | Zoneworks® XT Hive | - | CLIFE-SM-HV | LLIFE-SM-HV |
| Carton Quantity | | 10 pieces | | |
| Weight - single | | 0.6kg | | |
| Dimensions (L x W x H) | | 242mm x 125mm x 48mm | | |

| POWER, LAMPS AND BATTERY | EL | LP | L10 |
|-----------------------------------|--|----------------|------------------------|
| Power Consumption (Standby / Max) | 0.4W / 1.3W | 1.0W / 3.9W | 1.3W / 3.0W |
| Lamp(s) | 1 x LED | | |
| Battery | Lithium Iron Phosphate | | Lithium Nanophosphate® |
| Voltage (V) / Capacity (mAh) | 3.2V / 3000mAh | 3.2V / 3200mAh | 3.3V / 2500mAh |
| Charging Method | Intelligent Current Limited Constant Voltage | | |

| TECHNICAL SPECIFICATIONS | |
|----------------------------|-----------------|
| Operating Mode | Non-Maintained |
| Voltage (V) Frequency (Hz) | 220-240V (50Hz) |
| Operating Temperature | 1°C to 40°C |
| IP Rating (IP) | IP20 |


| SPARE PARTS | EL | LP | L10 |
|-------------------------|---------|---------|---------|
| Battery | 1560160 | 1550030 | 1530071 |
| DALI Node | - | 8003060 | 8003060 |
| Zoneworks® XT Hive Node | - | 8003190 | 8003190 |

| CLASSIFICATION | EL | LP | L10 |
|----------------|-----|-----|-----|
| C0 | D40 | D40 | D40 |
| C90 | D40 | D40 | D40 |

| SPACING TABLE AND MOUNTING HEIGHTS – AS/NZS 2293.1:2018 (MINIMUM LIGHT LEVEL OF 0.2 LUX) | | | | | | | | | | | | | | |
|--|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
| Classification | 2.1m | 2.4m | 2.7m | 3.0m | 3.3m | 3.6m | 4.0m | 4.5m | 5.0m | 6.0m | 7.0m | 8.0m | 9.0m | 10.0m |
| D40 | 11.5 | 13.2 | 14.8 | 16.5 | 18.1 | 19.5 | 20.1 | 20.7 | 21.2 | 22.1 | 22.6 | 23 | 23.1 | 23 |

For 1 lux and AS/NZS 2293.1:2005 spacing tables please visit:
<https://clevertronics.com.au/spacing-tables/>

*Warranty information located at:
<https://clevertronics.com.au/warranty-statement/>

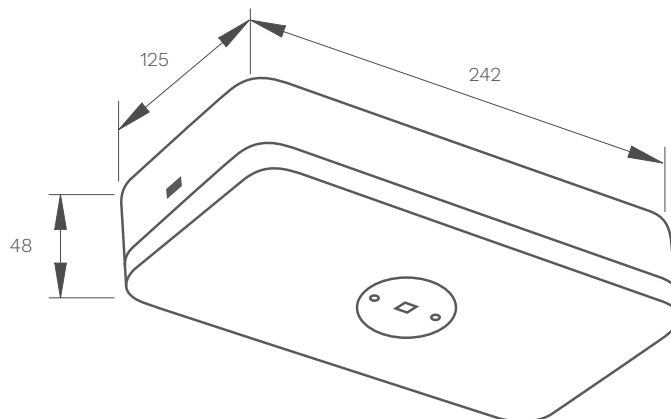

Dimensions (mm)

clevertronics.co.nz
clevertronics.com.au

1 Caribbean Drive, Scoresby VIC 3179
 P +61 3 9559 2700 F +61 3 9559 2799 E info@clevertronics.com.au

Clevertronics is committed to continuously improving its products.
 All features and specifications are subject to change without prior notice.
 C228A LIFELIGHT SM-EM-002

