


## CLEVERTRONICS LP ARGONAUT LED WEATHERPROOF BATTEN

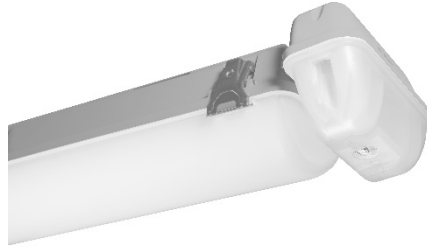

### PRODUCT INFORMATION

Catalogue Number	CWB2LEDS-P-HV
MIC	AUB02820140001
Description	LP Premium 2ft Argonaut Weatherproof Batten with LED Emergency POD
Construction	Polycarbonate Base, Polycarbonate Diffuser and Captive Stainless Steel Clips with Tamperproof Screws
Mounting	Surface Mount
Dimensions L x W x H	660mm x 120mm x 108mm
Weight	2.2kg
Operating Mode	Sustained
Testing System	Zoneworks XT HIVE (RF)
Battery	Lithium Iron Phosphate, 3.2V 3200mAh
Charging Method	Intelligent Current Limited Constant Voltage
Diffuser	Polycarbonate
Driver / Ballast	OSRAM OT FIT 30/220-240/700 CS
Lamp(s)	LED strip module, 4,000K natural white, 50,000h life [L70/B50 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	2050 lm @ 98lm/W
Power Consumption	21 Watts (Lamps ON), 0.4 Watts (Lamps OFF)
IP Rating	IP66 (Batten), IP65 (POD)
Operating Temperature	0°C to 40°C
AS2293 Classification	C <sub>0</sub> =D80 C <sub>90</sub> =D80
Impact Rating	IK08

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1550050	Battery, LP 3.2V 3200mAh 70mm lead, no Bracket
8002685	PCA:LED Strip Argonaut Stand & tray,0.6m
CLIFE-PRO-CKIT-NP	LifelightPro,Control Only,Batten,LP, NP
8003190	PCA: RF Node CT10678-Ax internal antenna

*The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order*