


CLEVERTRONICS L10 ARGONAUT LED WEATHERPROOF BATTEN

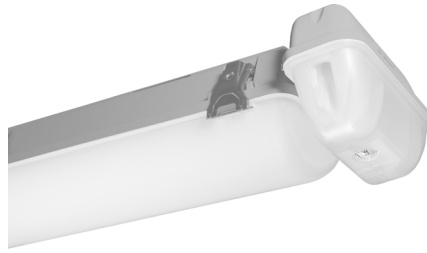

PRODUCT INFORMATION

Part Number	LWB4LEDS-P
MIC	AUB01320100001
Description	L10 Lithium Nanophosphate Argonaut weatherproof batten with LED Emergency POD, Enabled with Clevertest Plus
Construction	Polycarbonate base, polycarbonate diffuser and captive stainless steel clips with tamperproof screws
Mounting	Surface mount
Dimensions L x W x H	1225mm x 157mm (POD) x 111mm, (Batten width is 110mm)
Weight	3.3kg
Operating Mode	Sustained
Testing System	Clevertest Plus Enabled (Not activated by default)
Battery	Lithium Nanophosphate, 3.2V 2500mAh
Charging Method	Intelligent current limited constant voltage
Diffuser	Polycarbonate
Driver / Ballast	Tridonic LC 57W 800-1050mA
Lamp(s)	LED strip module, 4,000K natural white, 149,000h life [L70/B50 Ta 40°C], 89,000h life [L80/B10 Ta 40°C], Ra>80
Operating Voltage	240V AC; 50Hz
Power Factor	0.95
Total lumen output	4125lm @ 96lm/W
Power Consumption	44W (MAX Charge - Lamp ON), 41W (Standby Lamp ON), 0.4W (Standby Lamp OFF)
IP Rating	IP65
Operating Temperature	0°C to 40°C
AS2293 Classification	C ₀ =D80 C ₉₀ =D80
Impact Rating	IK08

REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530050	BATTERY:L10 3.3V 2.5AH 70mm lead,noBRKT (x 2)
8002690	PCA:LED Strip Argonaut Standard inc tray
1330057	LED Driver - LC 57w 800-1050mA,flexC Ip
AUM01370080001	Lifelight Pro,Control Only, 850mm, L10, NP, OWC

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order